



2024-2025


# Zmotion Technology Product Catalogue




Vision Motion Controller




Motion Controller



Motion Control Card



IO Expansion Module



HMI





**Zmotion®**

**正运动技术**

**做最好用的运动控制**

## | Company Profile

**Zmotion Technology is a national high-tech enterprise, which focuses on motion control technology R&D (general motion control software & hardware products).** In Zmotion, there integrates lots of experienced talents from famous companies or institutions, such as Huawei, Huazhong University of Science and Technology etc. At the same time, Zmotion insists self-innovating and collaborating with comprehensive universities to research basic knowledge of motion control. In this way, Zmotion has already become one of the fastest growing industrial motion control companies in China, also it is the rare company that has completely managed core technologies of motion control and platform technology of real time industrial control software.

Now, Zmotion develops many motion control products, mainly including 2-24 axes **embedded pulse motion controller**, 2-128 axes **embedded EtherCAT motion controller**, 2-24 axes network pulse motion control card, 2-128 axes **PCI EtherCAT motion control card**, **PCIE / XPCIE EtherCAT motion control card**, and 2-240 axes **vision motion controller**. In addition, Zmotion provides **HMI** and all kinds of **expansion modules**.

Zmotion motion control real-time kernel "MotionRT" has developed from MotionRT1 to MotionRT7 in recent 10 years. Before, it only supports real-time motion and real-time RTBasic. Now, it can achieve real-time motion, **RTBasic**, **RTPLC**, **RTHMI**, **EtherCAT**, **vision**, **robot control**, **G code**, etc., and it is compatible with Windows and Linux and tries to realize cross-platform. Moreover, MotionRT7 is the first self-developed Windows motion control real-time soft kernel in China.

Zmotion vision motion controller superimposes some machine visual functions based on motion functions, such as, vision positioning, vision measurement, contour matching and QR code/bar code detection. It extremely reduces barriers of machine vision application. And hardware is highly-integrated into a small volume. For software, easy to develop in one-stop-shop.

The advantage "**Easy to Use**" mentioned above is for all Zmotion motion control products, except development by all kinds of operation systems and language function libraries, there is one "All In One" industrial application development software "RTSys" made in China, and Zmotion keeps promoting it. Through RTSys, you can achieve one-stop-shop development on Hmi, Basic / PLC hybrid motion, and machine vision, and it can do real-time simulation, online tracking Debug, etc., in this way, shorten development period, reduce development risk.

All Zmotion software and hardware products strictly obey Huawei "IPD-CMM" development process, which means they are stable and reliable at the telecom level, also with wonderful software and hardware compatibility and expansibility. From quality control, Zmotion products strictly implement the ISO9001 quality management system in market needs, product definition, design development, material supplement, production and processing, customer service, etc. Then it can be known high-quality can be ensured. In addition, CE certifications are made.

Zmotion always aims to do better motion control. Nowadays, our products are widely used in 3C electronics, laser processing, printing, packaging, robot, entertainment, medical devices etc. Zmotion always puts quality at the first place, regards requirements as the first priority, takes "creating value" as the base, and considers "improving performance" as the pursuit. **All the time, what we do is to supply smart manufacturing with more valuable motion control products, solutions, and services.**

## | Corporate Culture

### Mission

Let Chinese Motion Control Lead the World

### Wish

Better Motion Control, Smarter Life

# | Business Philosophy

## Strive

### As a Struggler

Keep Growing  
Focus on Target  
Adapt to Path  
Create Tools



## Service

### Take Service as Soul

Less Service: Easy to Use  
Better Service: Efficient Response  
Reliable Service: Good Performance



## Study

### Take Study as Routine

Study in Needs  
Study in Competition  
Study in Cooperation



## Help

### Take Help as Arm

Help Colleagues  
Help Partners  
Help You,  
Achieve Us

# | Enterprise Qualification



43<sup>+</sup> Trademark  
Certification

60<sup>+</sup> CE  
Certifications

32<sup>+</sup> Soft  
Certifications

24<sup>+</sup> Patents



# Development History

- **Embedded Vision Motion Controller**  
VPLC532E

- **ZHD500X HMI**

- **ZMIO310 Expansion Module**



## 2021

- Zmotion New Address
- Zmotion New Office in Xi'an
- Zmotion New Office in Dongguan

- **Embedded Vision Motion Controller**  
VPLC516E

- **12-Axis EtherCAT Vertical Motion Controller**  
XPLC312E

- **8-Axis EtherCAT Network Motion Control Card**  
ECI2828-V2



## 2020

- **New Product Series: VPLC Machine Vision Motion Controller**

- **2-6 Axis Pulse Motion Controller / Card**  
ZMC0XX Controller  
ZMC1XX Controller  
ZCAN Bus Expansion Module  
ECI1000 Card



## 2013

- **Zmotion Technology was Established**


- **Windows Real-Time Motion Control Soft Kernel**  
MotionRT7

- **Open Laser Scan Motion Controller**  
ZMC408SCAN-V22

- **Automatic Fast-Configuration Software**  
RTFuse

- **PC-based Motion Control Card**  
XPCI / XPCIE

- **Vision Motion Controller**  
VPLC710



## 2022

- Zmotion New Office in Chengdu
- Zmotion New Office in Wuhan

- **60-Axis EtherCAT & RTEX Motion Controller**  
ZMC460N

- **20-Axis EtherCAT & RTEX Scan Motion Controller**  
ZMC420SCAN

- **4-Axis Network Motion Control Card**  
ECI2418B


- **ZMIO300 Bus IO Expansion Module**



## 2019

- "Zmotion" Brand Upgraded
- Zmotion Obtained "ISO" Certification
- Zmotion New Office in Xiamen
- Zmotion New Office in Qingdao

- **4-12 Axis Pulse Motion Controller**  
ZMC2XX Controller  
ZHD300/ZHD300X Handheld HMI




## 2014

- **IDE**  
RTSys



- **National Produced Wide Temperature Controller**  
HXX Controller

- **PCIe EtherCAT Mmotion Control Card**  
PCIE464



2023

- **Motion Controller**  
ZMC432M

- **PCIe EtherCAT Card**  
PCIE464M

- **Vision Motion Controller**  
VPLC712



- **MotionRT750**  
High-performance real-time control kernel under Windows / Linux

2024


2025

- **6-Axis Dual-Bus Motion Controller (EtherCAT & RTE)**  
ZMC306N

- **6/8 Axis EtherCAT Motion Control Type PLC**  
XPLC006E/XPLC864E

- **EtherCAT Expansion Module for 8-Axis**  
EIO24088

- **Network IO Control Card**  
ECI0032/ECI0064



2018

- Zmotion Technology Branch Established in Pune, India

- **6/32 Axis EtherCAT Motion Controller**  
ZMC406/ZMC432


- **32-Axis RTE Motion Controller**  
ZMC432N

- **64-Axis EtherCAT & RTE PCI Motion Control Card**  
PCI464

- **12-Axis High-Performance Pulse Motion Controller**  
ZMC412

- **EtherCAT IO Expansion Module**  
EIO1616

- **ZHD400/ZHD400X HMI**



2017

- Be Awarded as "National High-Tech Enterprise"

- Zmotion New Office in Suzhou

- Zmotion New Office in Foshan

- **3-16 Axis Pulse Motion Controller**  
ZMC3XX Controller

- **3-8 Axis Network Motion Control Card**  
ECI2000 Card  
ECI3000 Card



2015

- **The First 64-Axis EtherCAT Motion Controller in China**  
ZMC464



- **The First Motion Control PLC in China**  
(√ hybrid programming among ZBasic, ZPLC, ZHMI)  
XPLC864



2016

- Zmotion New Address

# MotionRT Development History

## China's First R & D

Windows Motion Control Real-Time Soft Kernel

## Cross-Platform

Motion Control Real-Time Soft Kernel



Real-Time Bus (EtherCAT/RTEX/XY2)

Real-Time HMI (RTHmi)

Real-Time PLC (RTPLc)


Real-Time BASIC (RTBasic)

Real-Time Motion (RTMotion)

G Code (RTCNC)


Laser Galvanometer (SCAN)

Robot Control (Robot)

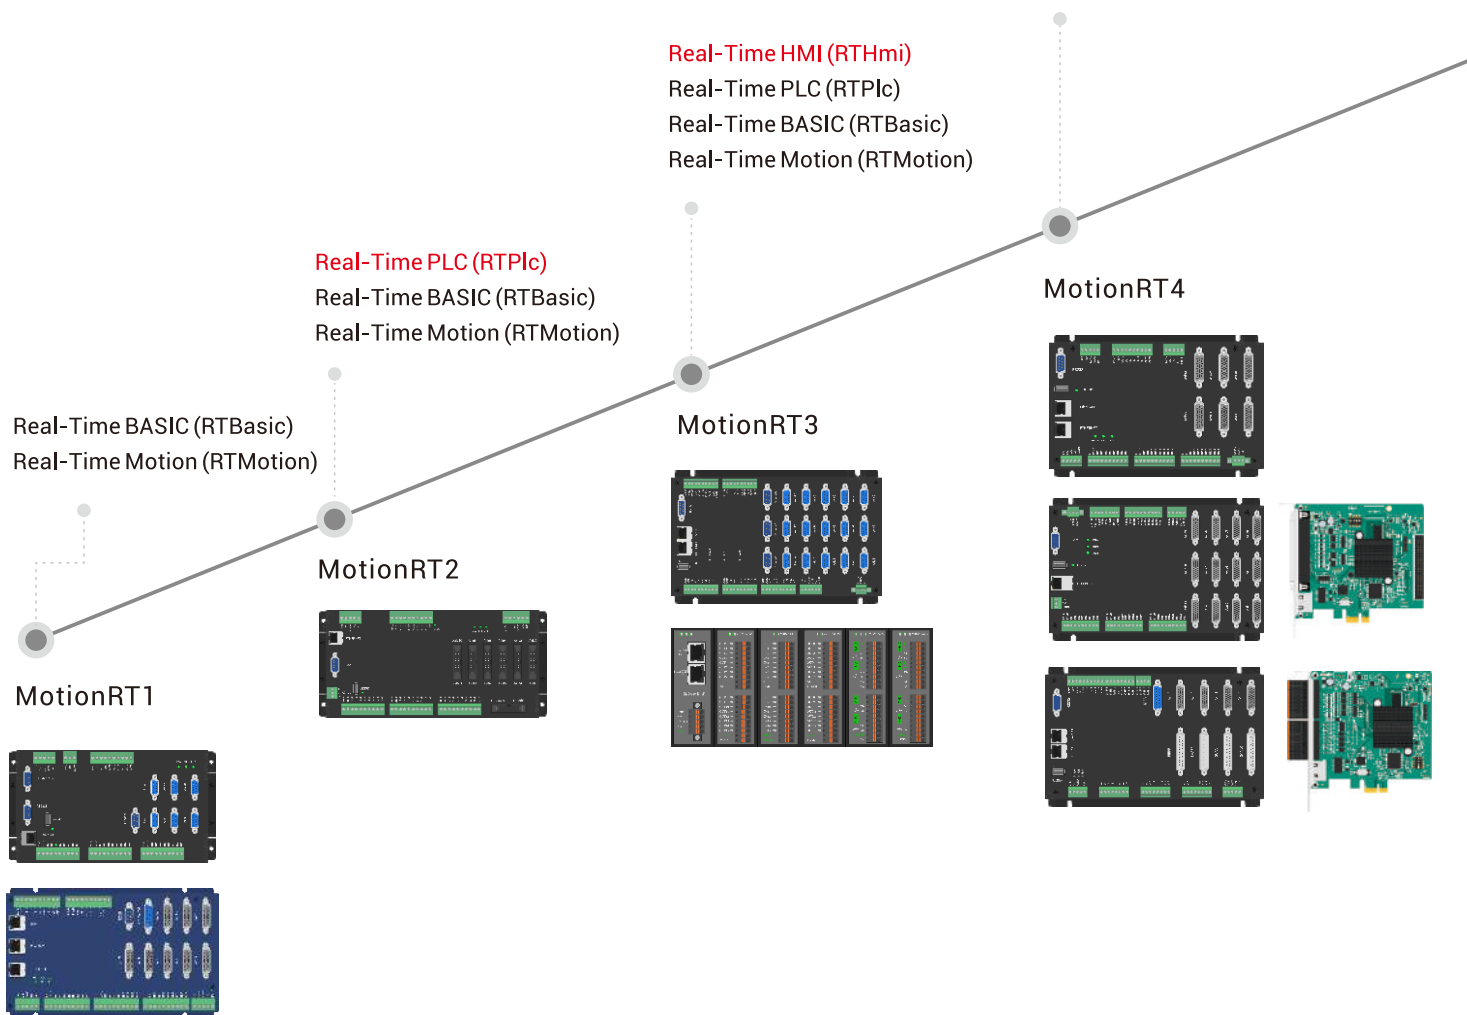

**Real-Time Linux (ARM)**  
**Rapid Local Port "LOCAL"**  
**Machine Vision (RTVision)**  
 Real-Time Bus (EtherCAT/RTEX/XY2)  
 Real-Time HMI (RTHmi)  
 Real-Time PLC (RTPlc)  
 Real-Time BASIC (RTBasic)  
 Real-Time Motion (RTMotion)  
 G Code (RTCNC)  
 Laser Galvanometer (SCAN)  
 Robot Control (Robot)

MotionRT5




**Real-Time Linux (x86)**  
 Rapid Local Port "LOCAL"  
 Machine Vision (RTVision)  
 Real-Time Bus (EtherCAT/RTEX/XY2)  
 Real-Time HMI (RTHmi)  
 Real-Time PLC (RTPlc)  
 Real-Time BASIC (RTBasic)  
 Real-Time Motion (RTMotion)  
 G Code (RTCNC)  
 Laser Galvanometer (SCAN)  
 Robot Control (Robot)

MotionRT6



**Real-Time Windows (x86)**  
 Rapid Local Port "LOCAL"  
 Machine Vision (RTVision)  
 Real-Time Bus (EtherCAT/RTEX/XY2)  
 Real-Time HMI (RTHmi)  
 Real-Time PLC (RTPlc)  
 Real-Time BASIC (RTBasic)  
 Real-Time Motion (RTMotion)  
 G Code (RTCNC)  
 Laser Galvanometer (SCAN)  
 Robot Control (Robot)


MotionRT7

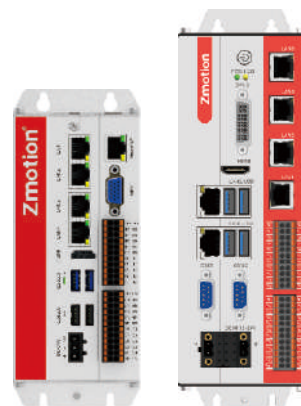



# MotionRT750 Windows / Linux

Motion Control Real-Time Kernel: cross-platform -- self R & D "x86 Windows / Linux motion control real-time kernel soft PLC"

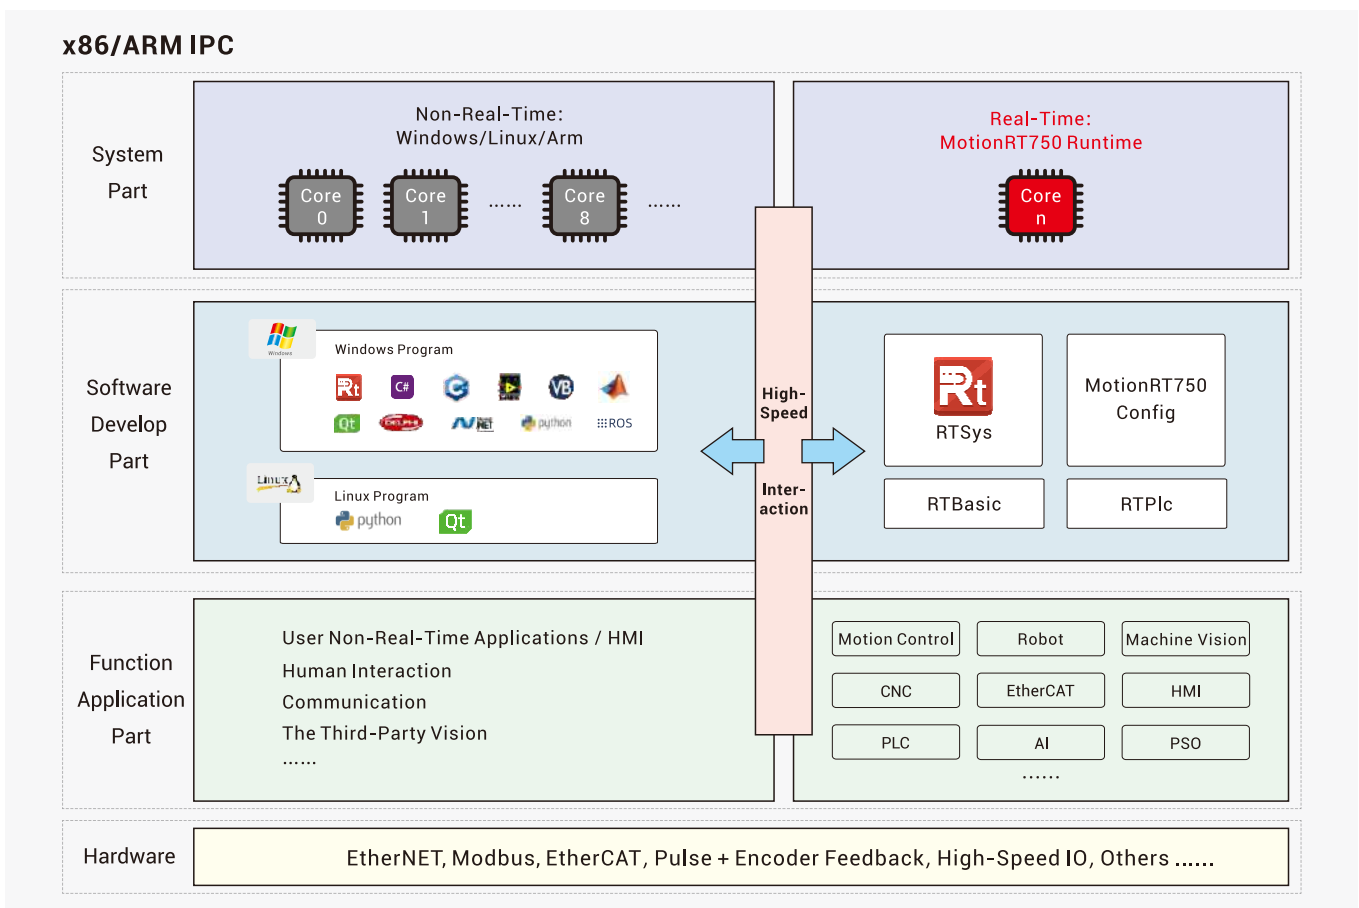

01

An independent software: suit for all kinds of Linux / Windows PC.

02

Compatible with other MotionRT, one-time develop, then rapidly switch to embedded, Linux, etc.

03

Uniform function library & rapid local port "LOCAL": the motion function calling can reach at "us" level, which is faster 10 times than normal PCI cards.

04

Integrate Machine Vision: quick to build all kinds of real-time applications.


05

Self R & D "x86 Motion Control Real-Time Kernel": max period of 50us, redundancy mode is 125us with 32 axes, for multi-channel EtherCAT synchronous period is 500us with 254 axes.

## Software Structure

Motion control program, vision algorithm and MotionRT7 motion control engine share memory and interact data at a high-speed, then the interaction efficiency of motion control and machine vision are promoted greatly.

User customize functions merge with Gmc, Gear/Cam, Frame, Robotics, CNC and other algorithms to create one specialized control system for users.

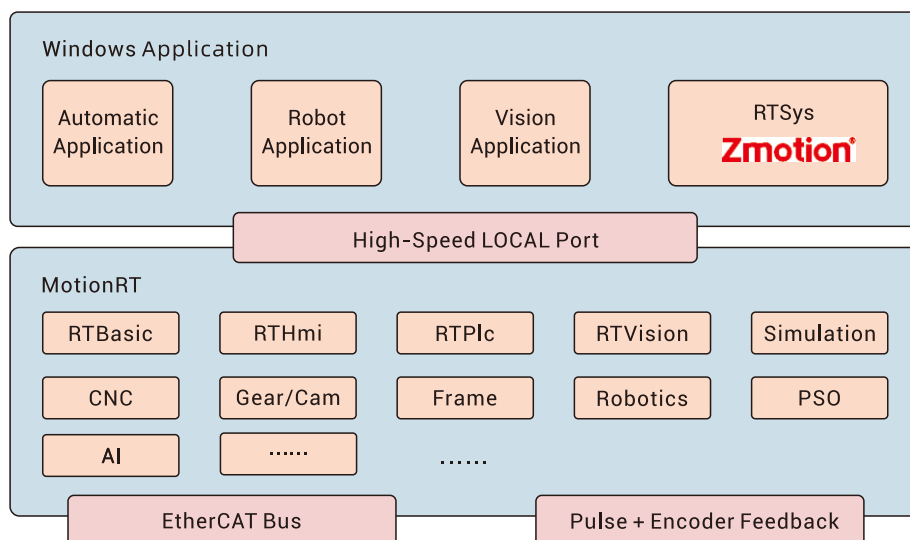

## Motion Control Functions

**Motion Axes:** EtherCAT, up to 240 axes

**IOs:** up to 4096 INs & 4096 OUTs by EtherCAT

**Analogs:** up to 512 ADs & 512 DAs by EtherCAT

### Functional Features:

- point-point, interpolation of linear, circular, helical, continuous processing.
- electronic cam/gear, synchronous follow, position latch, virtual-axis superposition.
- acceleration & deceleration of S curve, SS curve: softer trajectory motion.
- 1D/2D/3D high-speed PSO, vision fly-shooting, high-speed dispensing, laser.
- users can customize motion control algorithm, robot algorithm, etc.

**Machine Vision** support the third party vision



Vision Positioning



Blob Analysis



Vision Measurement



Detection & Identification


## How MotionRT7 Composes

- Green (no need to install): quick start
- Be with "Drive Operation Permission Authorization" (no authorization, also valid)
- Configure EtherCAT, functions, and parameters.
- Uniform & complete SDK library
- ON, Connect, Simulation, etc.


## Software

AX64 - MO8 - HW - ZV - R - YYYY


- |                   |   |
|-------------------|---|
| ① 64-Axis (6-254) | ④ Machine Vision  |
| ② Motion Control  | ⑤ R1: normal robotic arm<br>R6: robotic arm of 6-joint / special structure                  |
| ③ PSO             | ⑥ YYYY: customized function<br>NC xx Function / G Code<br>CNCxxx Function / CNCxxx Function |

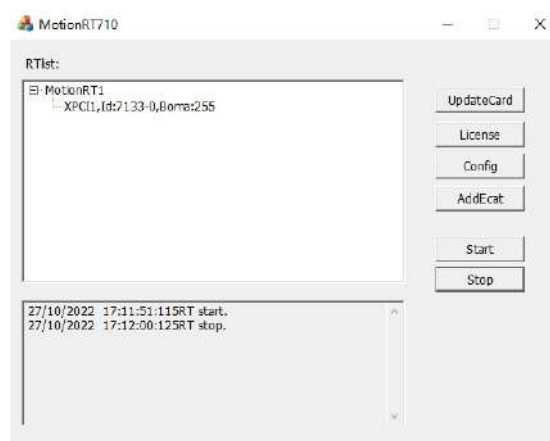


High-Speed Connect







# | System Diagram

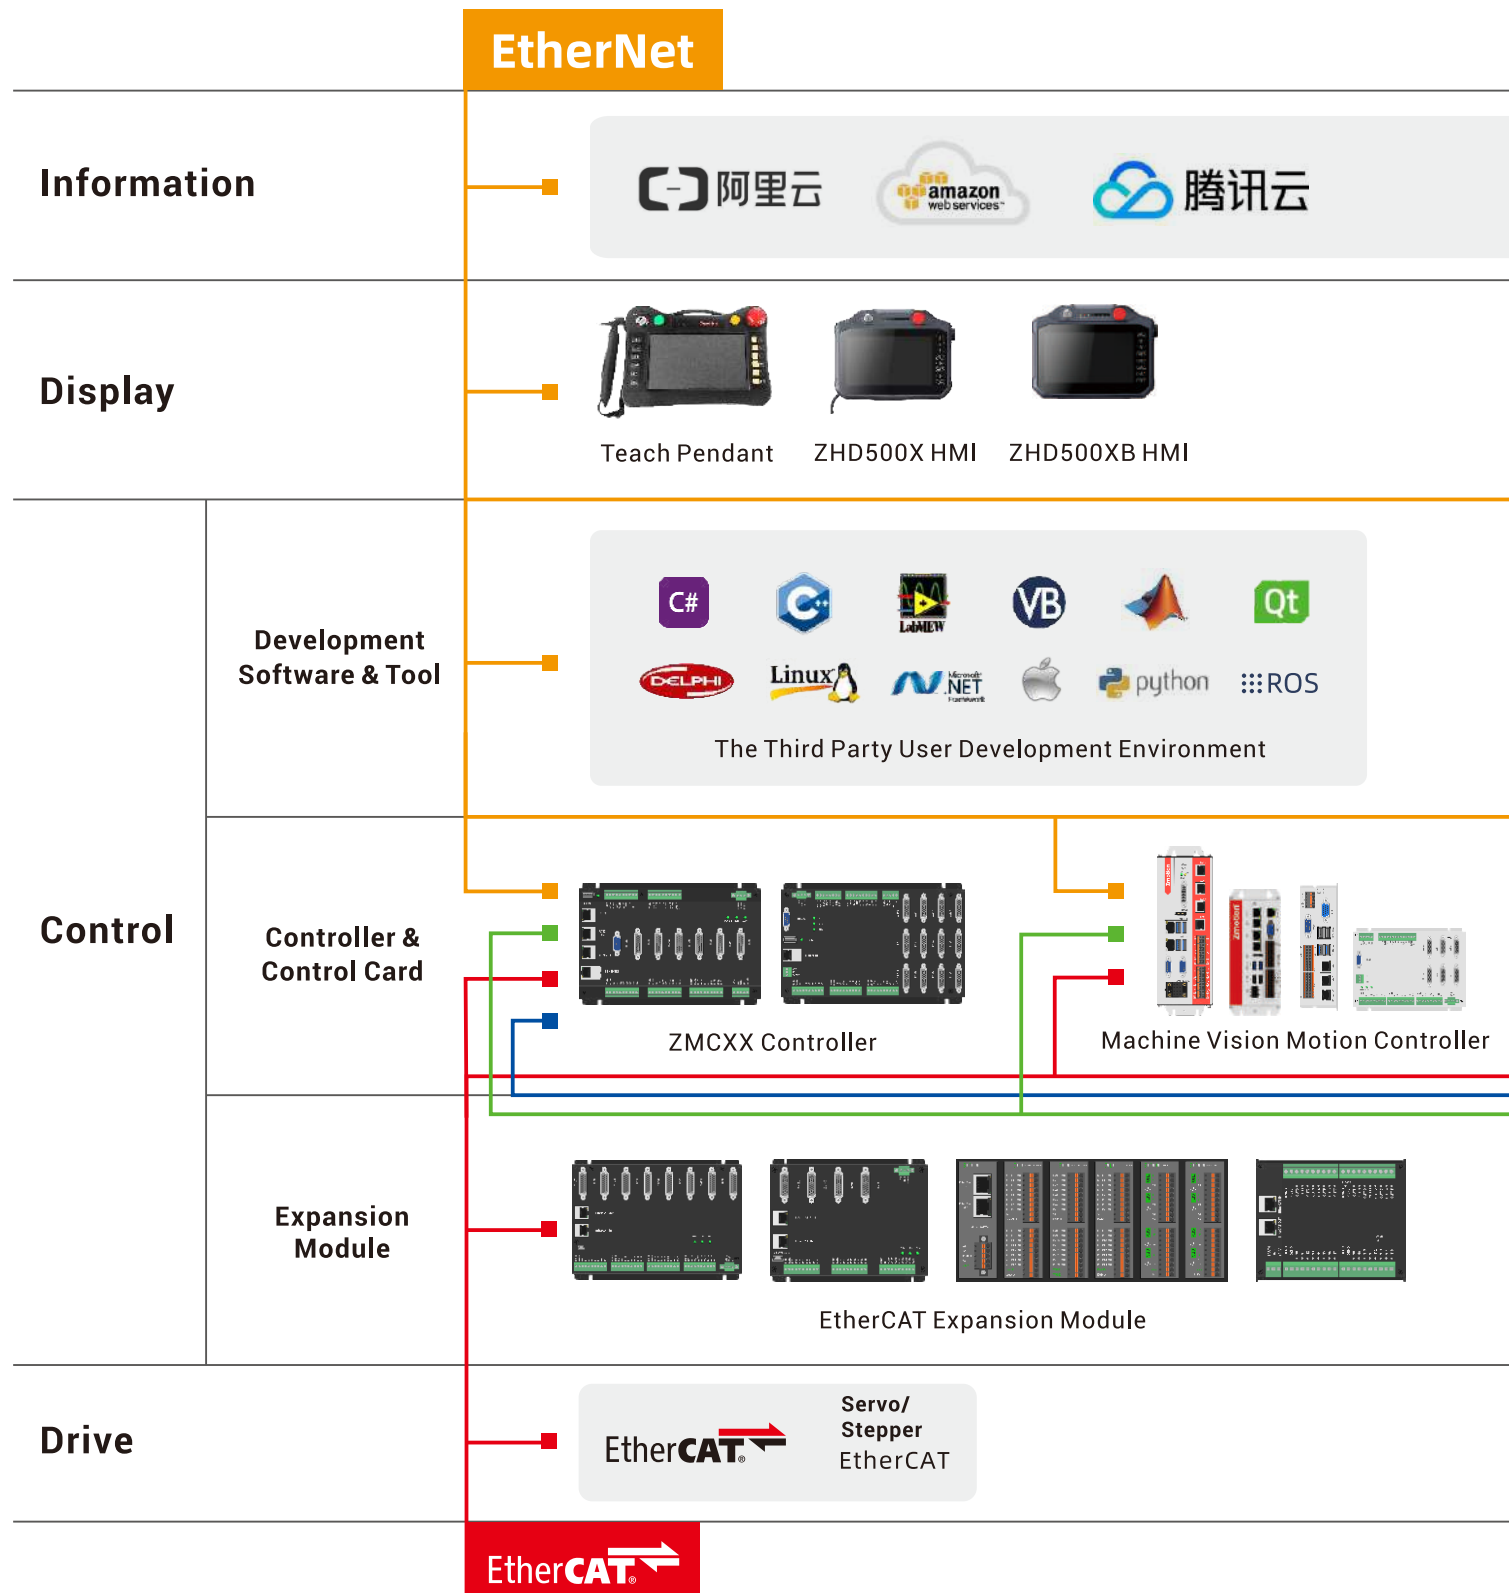

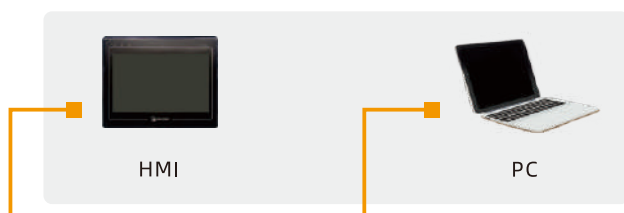

**Zmotion®**

RTSys/ ZmotionCad / ZRobotView/  
ZarDown/Zflash/ZmotionTwins/MotionRT7  
Zmotion Development Environment & Tools

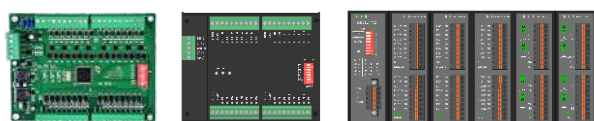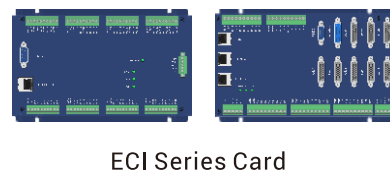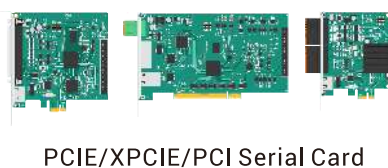

CAN




Servo/  
Stepper  
RTEX



# | Applications & Solutions



▲ 3C Electronics

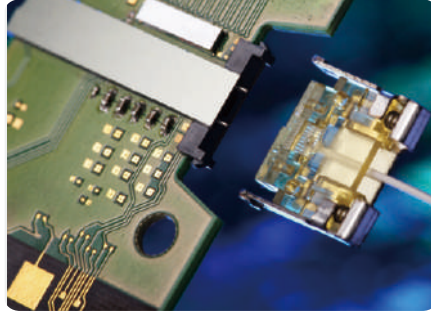


▲ Semi-Conductor



▲ Laser Processing Equipment




▲ Photovoltaic

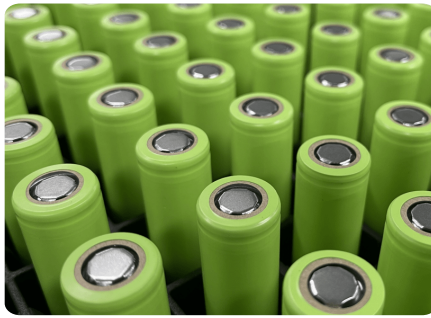

▲ Lithium Battery



▲ Automotive Equipment Manufacturing

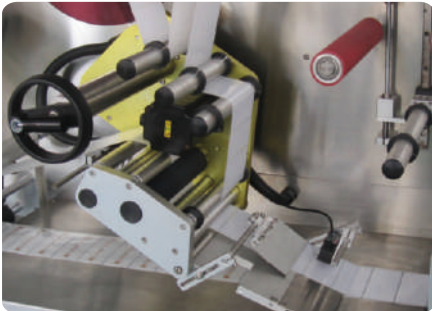

▲ Printing & Packaging



▲ Textile & Garment Equipment



▲ CNC Processing



▲ Medical Equipment



▲ Industrial Robot



▲ Logistics

# | Contents



## Product Property

P15-22

- Functional Property 1
- Functional Property 2

- Property 3
- Property 4
- Property 5

- Property 6
- Property 7



## Software Introduction

P23-30

- Software Introduction
- Programming Language Introduction

- Development Debugging & Diagnosis
- Motion Commands Easy to Use



## Motion Controller

P31-50

- Pulse Controller Structure
- Bus Controller Structure

- ZMC0XX
- ZMC2XX
- ZMC3XX

- ZMC4XX
- ZMC4XX Laser Scan
- XPLC Series
- XPLC300



## Vision Motion Controller

P51-60

- Vision Motion Controller System Structure

- Vision Functions
- VPLC516E
- VPLC532E
- VPLC7XX (x86)




## Network Motion Control Card

P61-72

- Pulse Card System Structure
- EtherCAT System Structure

- ECI IO Card
- ECI1000
- ECI2000

- ECI3000
- ECI382X



## PC-based Motion Control Card

P73-81

- PC-based Motion Control Card System Structure

- PCIE Bus Motion Control Card
- PCI Bus Motion Control Card
- XPCIE Bus Motion Control Card



## IO Expansion Module

P82-86

- EtherCAT Module Framework
- ZCAN Module Framework
- ZMIO310 Module Framework

- EtherCAT Expansion Module
- ZCAN Expansion Module
- ZMIO310 Series Expansion Module



## HMI

P84-91

- HMI



## Reference And Learning Materials

P92

- RTSys User Manual
- RTBasic Manual
- RTHMI Manual
- RTPLC Manual

- RTVision Manual
- PC Function Library Manual
- Zmotion Article
- Video


# Product Property



# Functional Property 1


## Do Better Motion Control

Simulation and online debugging are convenient, like VC.

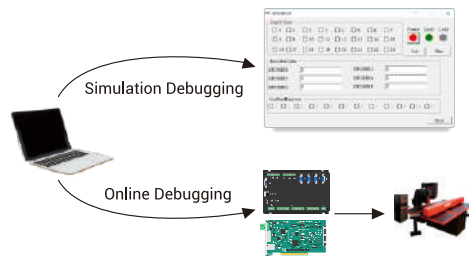


## Online Control

Control by operation systems / terminal without operation system.

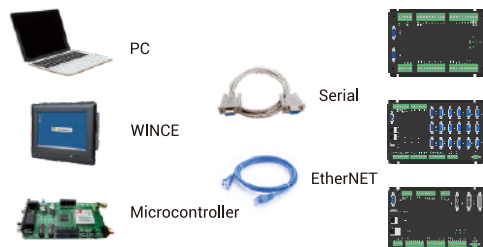


## Robotic Arm Control

Support multiple kinds of robots, one controller can control several at the same time. Stepper motor can be used because there is specialized acceleration & deceleration control.

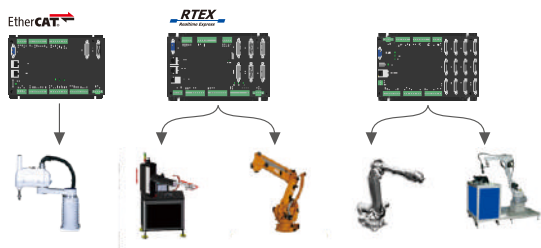


## Interpolation / Continuous Interpolation

Support multiple kinds of interpolation, including hybrid continuous interpolation.

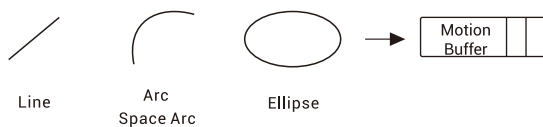


## Synchronous Motion

Support synchronous motions (IO, PWM, DAC, system variables modification, etc.) -- easy & efficient

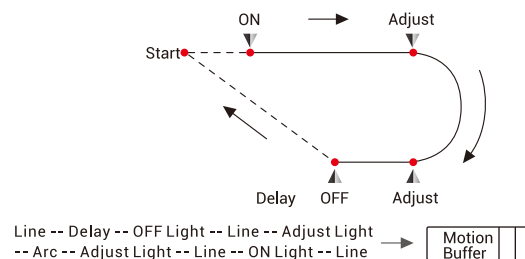


## Adaptive Look-ahead

Look-ahead automatically & Force special point's speed flexibly. Support look-ahead on max 16-axis interpolation. It can specify the additional axis not to do speed look-ahead.

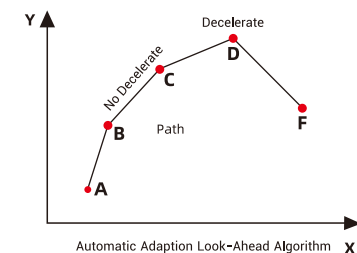


## S / SS Curve Acceleration & Deceleration

Merge small segments to do acceleration and deceleration. **S Curve**: continuous acceleration motion. **SS Curve**: continuous jerk motion -- smoother motion & less shock

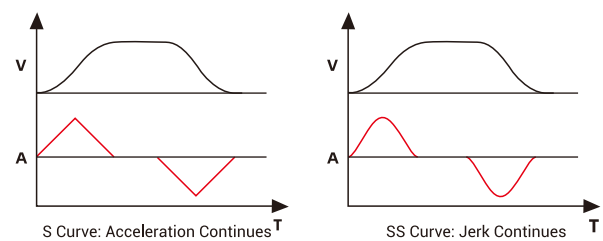

## Speed Limit for Small Circle


Different arc radius, different speed limits. For small segments, it will automatically fit as the arc to do speed limit.

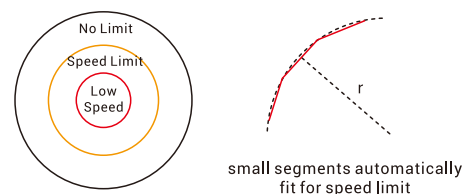


## Functional Property 2

### Multi-Machine Control

Each group's axes control one device independently.

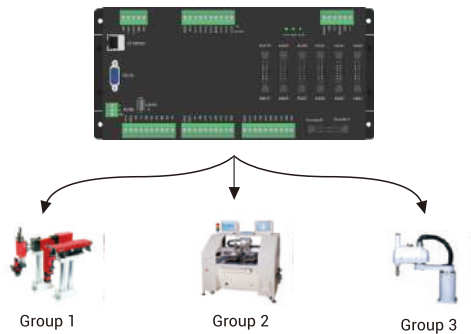


### Dynamic Speed

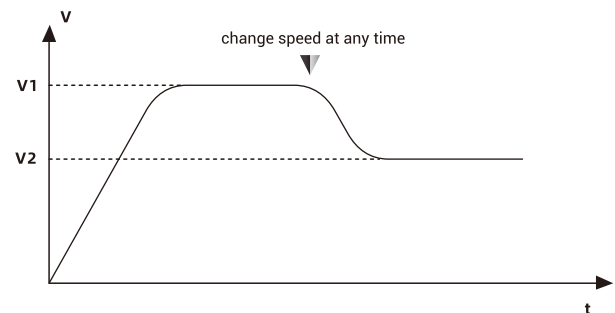


### Turntable Control


While the turntable is rotating, it can automatically do linear, circular interpolation at the same time.

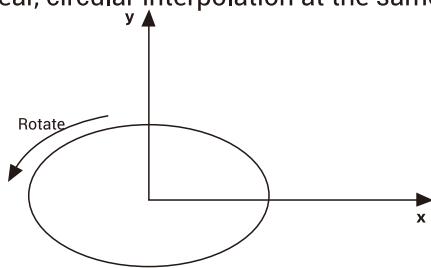

### Modify DPOS Dynamically

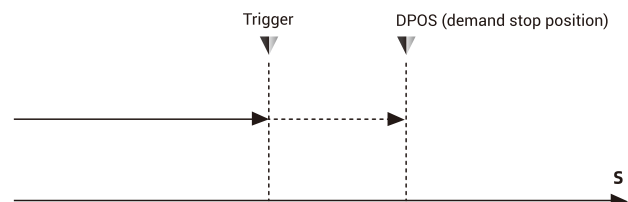


### Safety

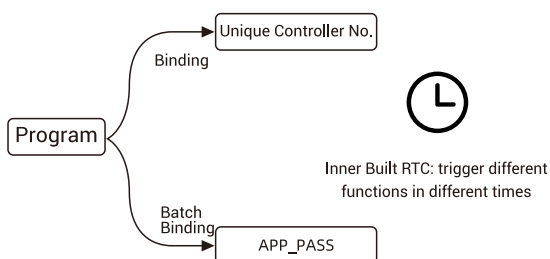


### Electronic Cam

Support changeable continuous cam.

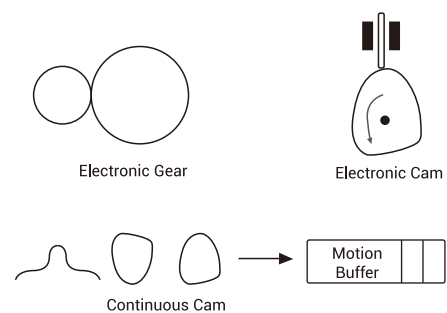


### Power Failure Detection / Storage

Trigger power-off interrupt function in the instant of power-off.

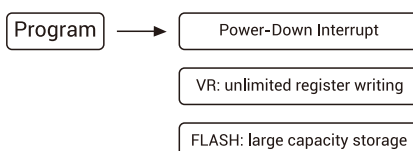

### Virtual Axis / Motion Superposition


It can be combined as all kinds of complex motions.

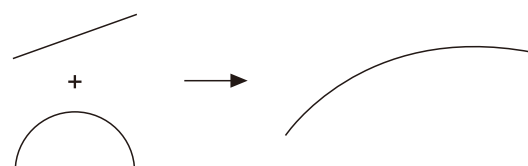

## Functional Property 3

### Three-Time Programming

RTBasic (ZBasic): second programming, also supports three-time program file, its behavior is defined by ZBasic program.  
 ✓ oversize three-time file & ZBasic grammar & G Code grammar &  
 3 File can be imported from U disk

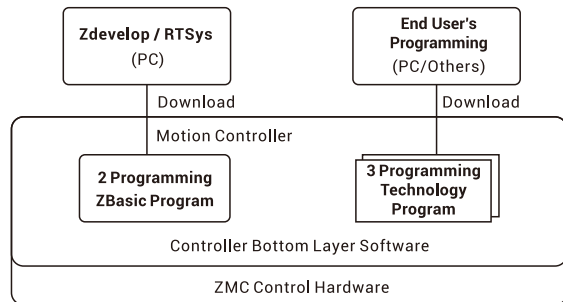


### Custom Communication

MODBUS master and slave station are OK. It can communicate with all kinds of special devices by "custom protocol".




### High-Speed Hardware Comparison Output

FPGA hardware comparator achieves hardware comparison output with unlimited capacity for camera high-speed photo (fly-shooting) and laser control.

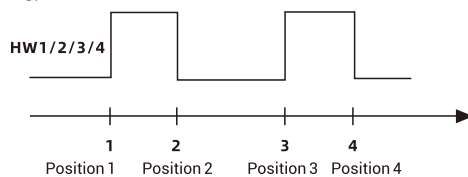

### Hardware PWM Output

FPGA hardware achieves high-precision PWM output for high-speed dispensing and laser control.

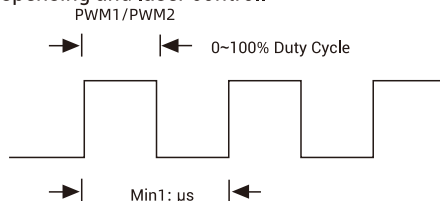


### Teach Pendant

Program freely.  
 Support the third party's touch screen for teaching.




### Backlash/Pitch Compensation

Compensation is achieved by simple parameters configuration.

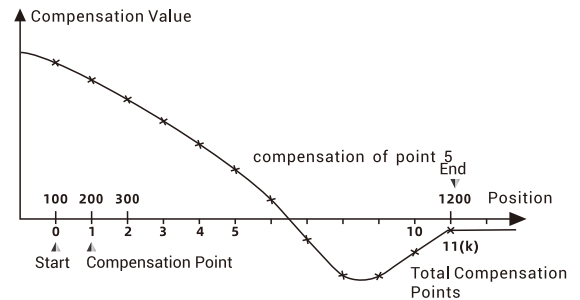


### Position Cycle Mode

Set axis coordinates in one certain range.




### Pulse Closed Loop

Specialized pulse closed loop mode, pulse and encoder share one axis No., and support pitch compensation at the same time.

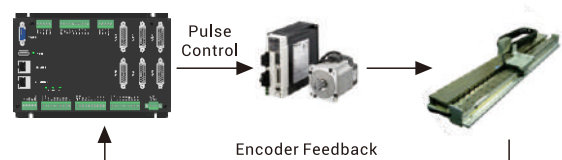

### Encoder Hardware Latch

Record now encoder position instantly by specialized IN to achieve high-precision position latch.

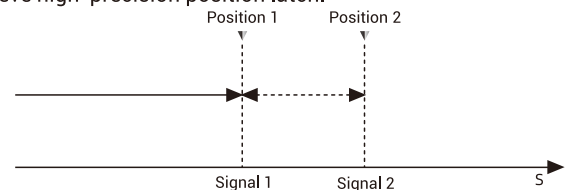

### Others


► Support IO expansion by EtherCAT & ZCAN

► Support EtherCAT  
 ► Support RTEK




# Functional Property 4


## Robot Application on Axis 4 / Axis 5 RTCP

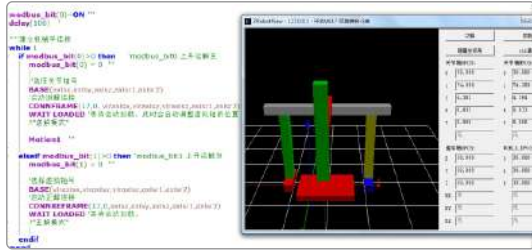

▲ Dual-Turntable




▲ Single-Turntable



▲ Dual-Turntable

Typical Applications: welding/dispensing/spraying/laser/woodworking, etc.

## Position Synchronous Output (PSO) Application

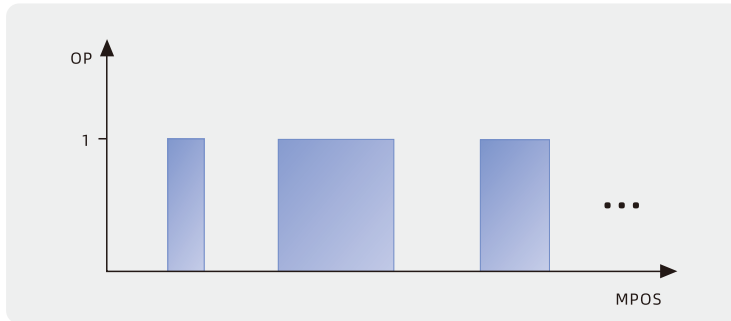


▲ HW\_PSWITCH Application

Any Initial Position: take real feedback of servo / grating as standard base.

Any Synchronous Width: minimal of one pulse width

Any synchronous Volume: write & clear synchronous output's buffer at any time.

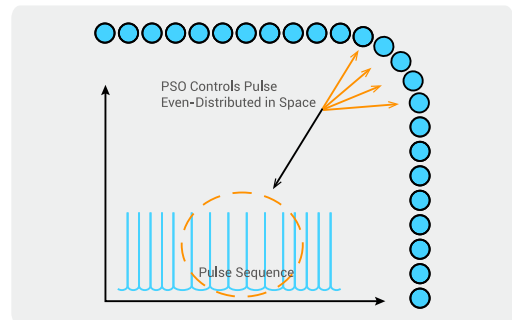


▲ PSO Laser Output &amp; Motion Control


Typical Applications:

high-precision dispensing/laser/shooting (take photo by industrial camera), etc.

## Spline Curve Interpolation

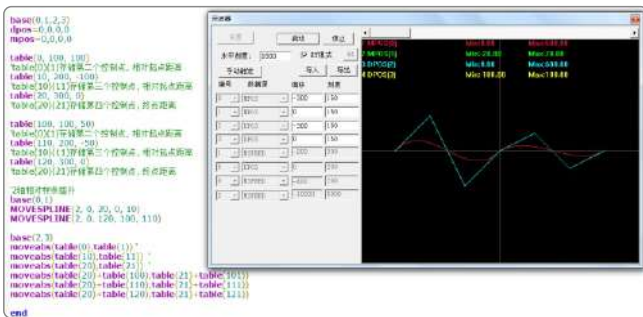

▲ MOVESPLINE

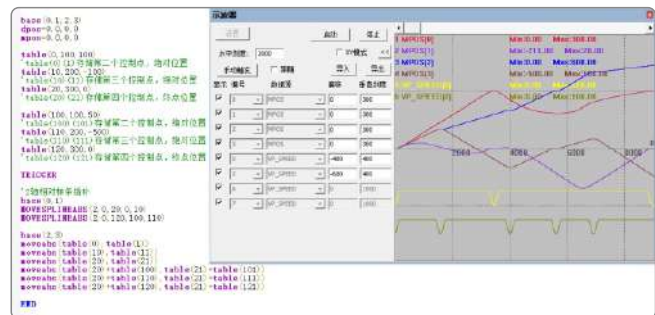


▲ MOVESPLINEABS

Spline Interpolation High-Precision High-Efficiency More Convenient

Typical Applications: High-Speed & High-Precision – metal process/wood process/high precision dispensing/laser

## Hybrid Interpolation (Pulse, EtherCAT, RTEX)

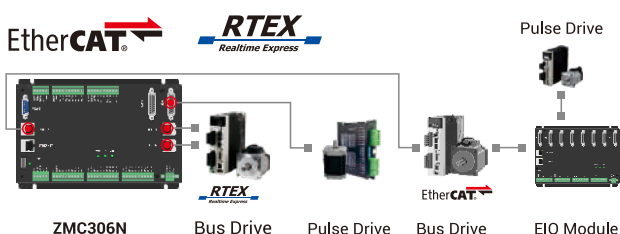

## High-Performance EtherCAT/RTEX

**EtherCAT®**


ZMC464 16-Axis (max 100µs) 64-Axis (max 500µs)  
PCI464 16-Axis (max 100µs) 64-Axis (max 500µs)

**RTEX®**  
Realtime Express

ZMC432N 32-Axis (max 500µs)  
PCI464 32-Axis (max 500µs)

## Functional Property 5

### Support All Kinds of Operation Systems & Programming Languages

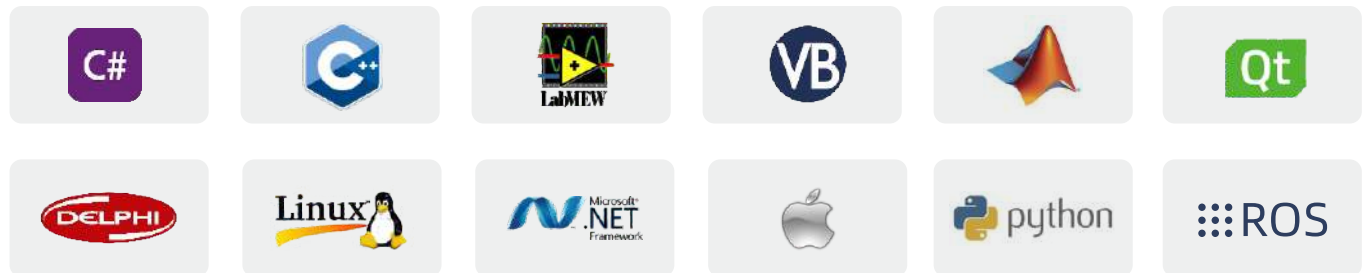


### Support C Language Compiling & Real-Time Executing

Some controllers can use inner C language to compile and run the program in RTSys IDE development environment.

- (1) promote program operation and calculation execution efficiency -- for high-speed applications
- (2) user can use own robotic arm algorithm model -- user system becomes more flexible and easier

No need to compile the code by external software: promote engineers' development efficiency & simplify project creating process and configuration process & enhance intelligent manufacturing

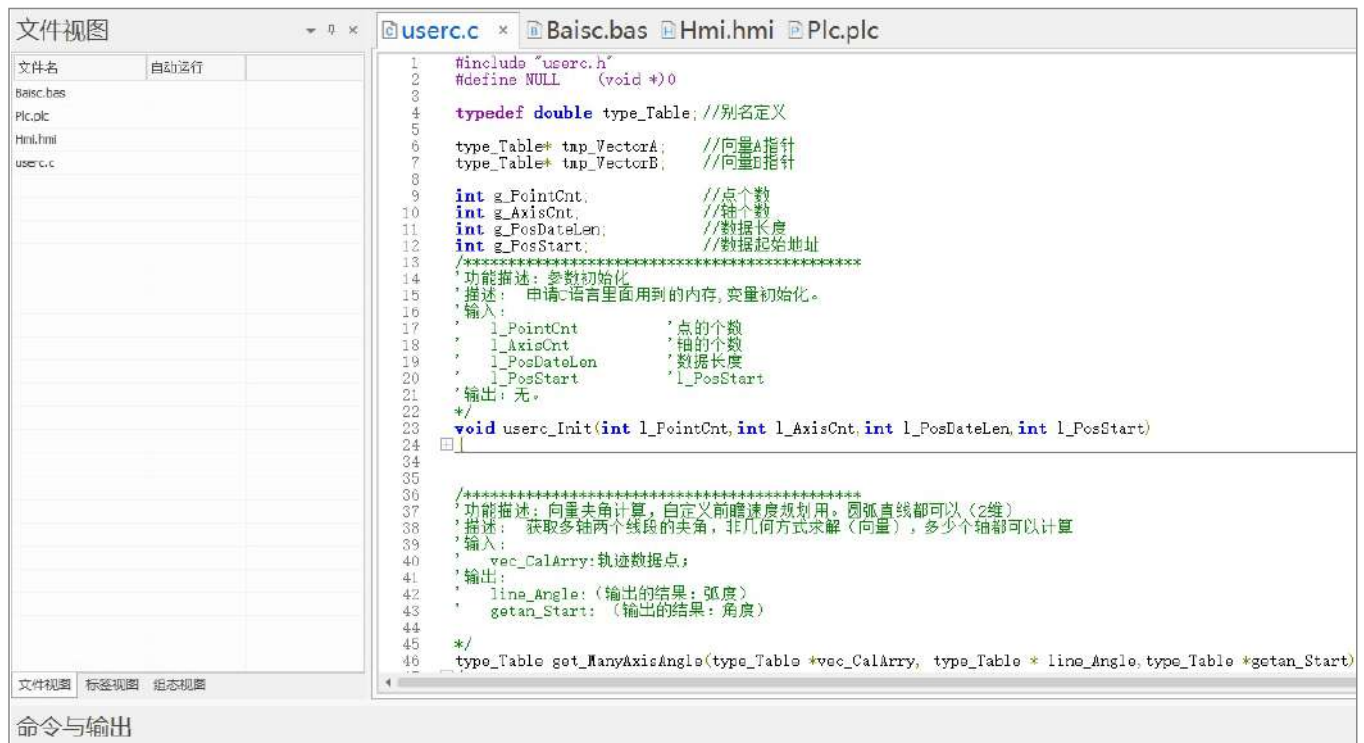


# Functional Property 6

## Laser Scan in Large Format

### Advantages

- one controller integrates with laser control + scan control + axis control -- save hardware cost.
- use XY2-100 scan protocol, 2D / 3D laser scan are OK, and support axis control and scan linkage interpolation.
- open development ways: C# / C++, industry software can be created rapidly.
- support "open laser correction" -- higher laser precision
- control axis, scan, laser power synchronously -- higher efficiency
- axis and laser scan do synchronous motion -- solve the problem "splicing error in traditional large format"


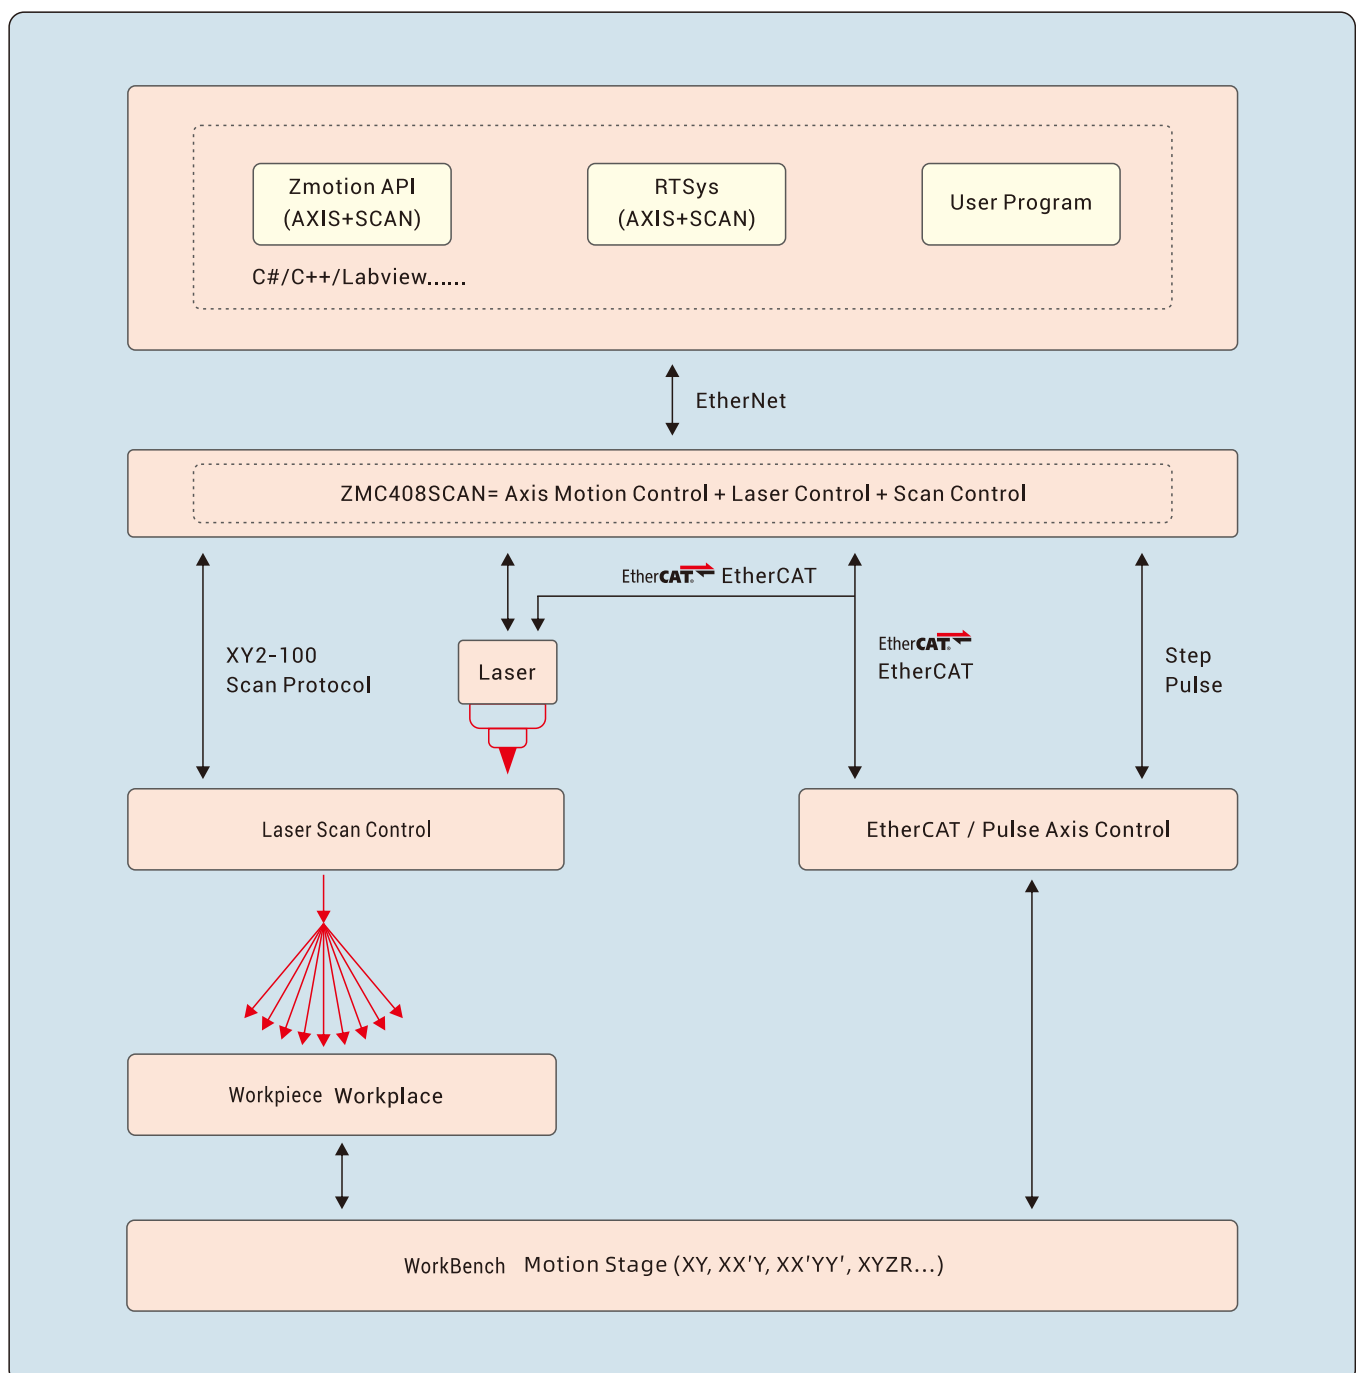


# Functional Property 7

## Open PSO Application in Laser Processing / Vision Fly-Shooting / Precision Dispensing


**PSO: Position Synchronized Output.** Laser is controlled precisely by triggering laser pulse at precise position to switch with fixed gap.

Real-time capture encoder feedback (/ pulse) to do position comparison, and do phase synchronization with laser output signal. While moving, trigger laser output to ON & OFF at constant distance or custom distance, then make pulses be average in processed object, including acceleration, deceleration, and constant speed.

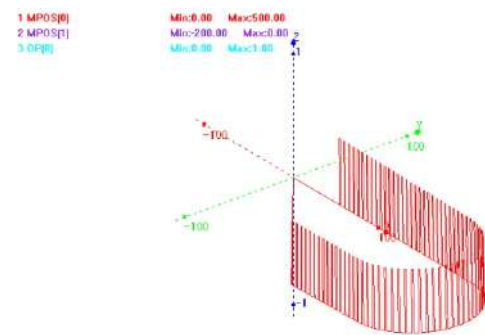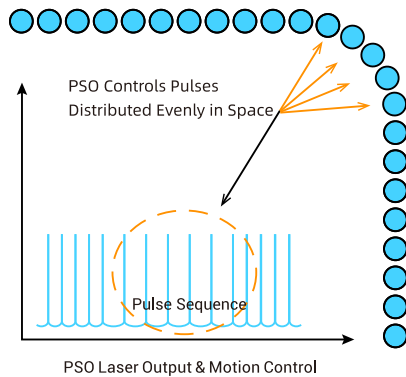


### 1. Custom Position Output

Invert electric level according to set position.

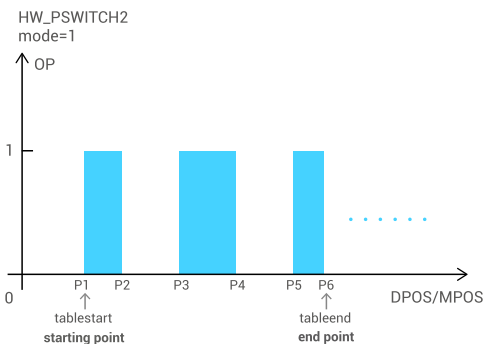


### 2. Period Output Mode with Fixed Distance

Set fixed distance, invert (once / N times) in each comparison position in cycle.

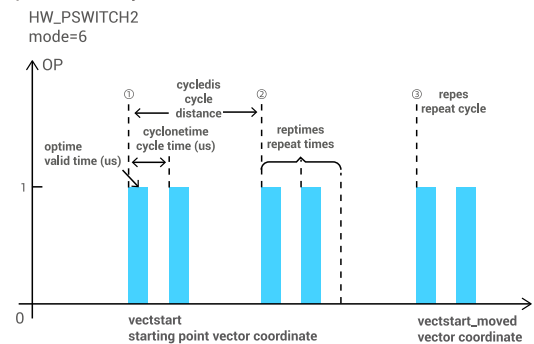


### 3. XYZ 3D Position Comparison Output

Support custom XY, and XYZ 3D position comparison output.

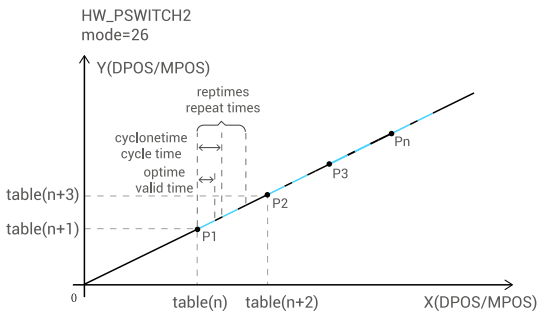

### 4. PWM, Analog, Speed Output Synchronously

PWM duty cycle, analog output, and speed of laser beam path change proportionally.

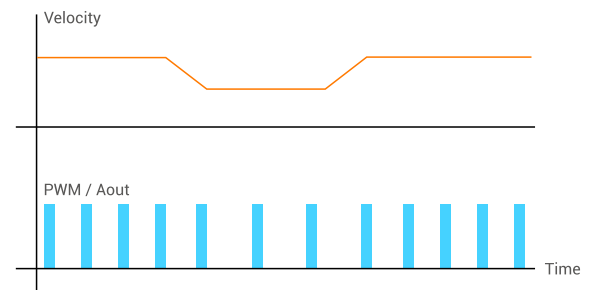


### Applications:

Laser Scan Marking, large-Format Splicing Marking, Fly Marking, Large-Format Laser Cutting, Laser Fly Cutting, Laser Welding, Laser Drilling & Molding, Scan + Motion Axis Linkage Marking, Laser Cleaning, Laser Polishing, Laser Cladding, Laser Additive Manufacturing, Wafer Scribing & Marking, PCB & FPCB Drilling, 3D Processing, etc.




# Zmotion Software Introduction

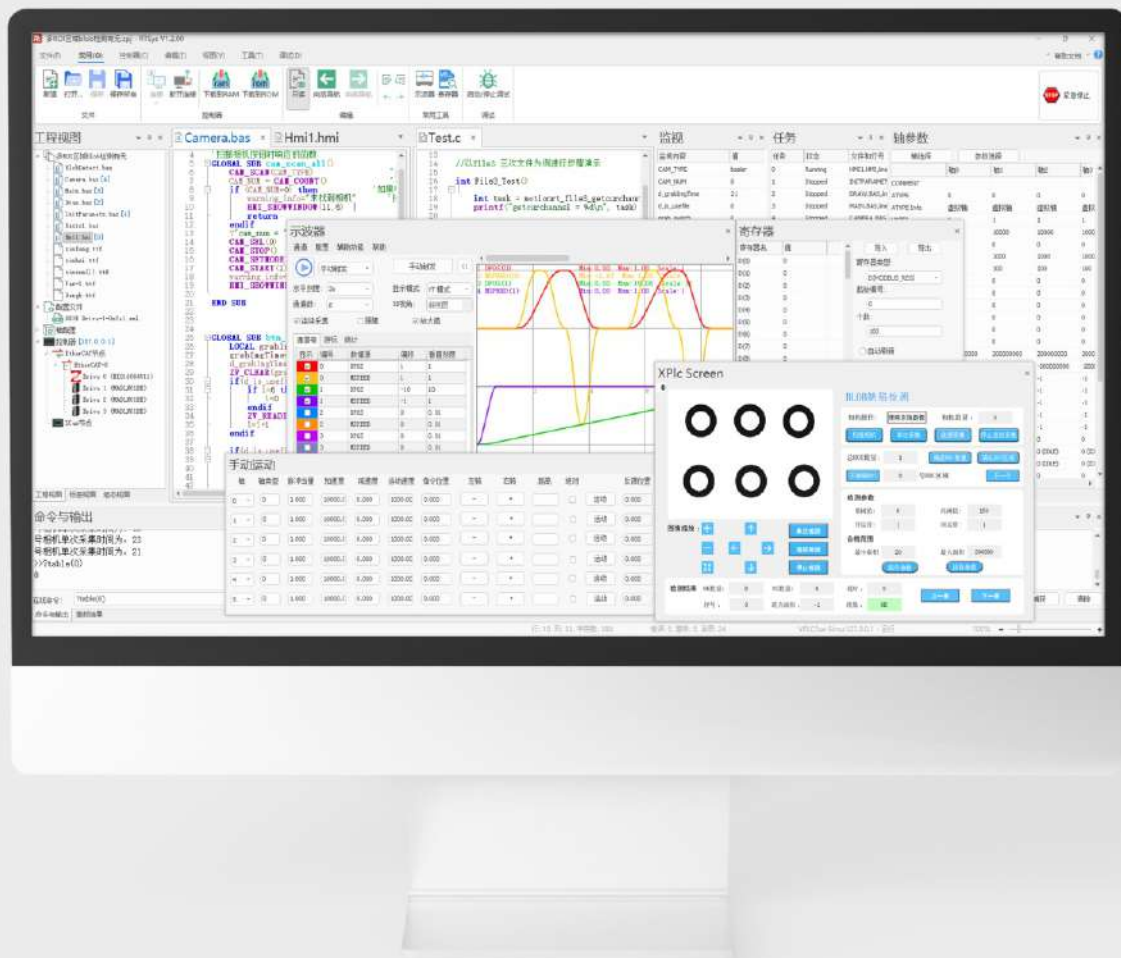

# Software IDE Introduction "RTSys"


**RTSys** is one free PC development IDE software, updated from ZDevelop (initial software), which can program, debug, and diagnose for Zmotion motion controllers. You can easy to edit codes and do configurations. After quick-start your application, real-time debugging for running one is supported. RTSys has Chinese & English by default.

## "All In One" RTSys IDE Development Environment

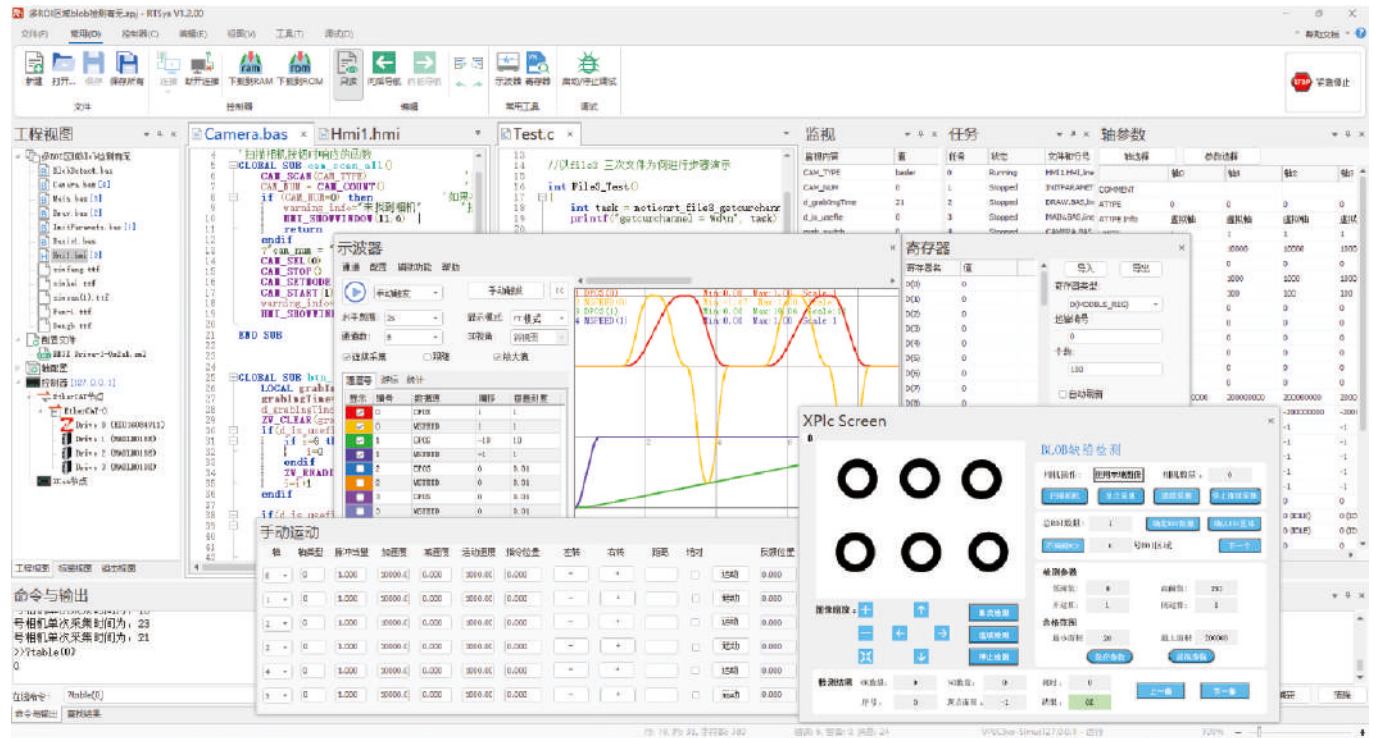


▲ Integrate with Basic, PLC, HMI, Vision

## Support PC Simulation Operation

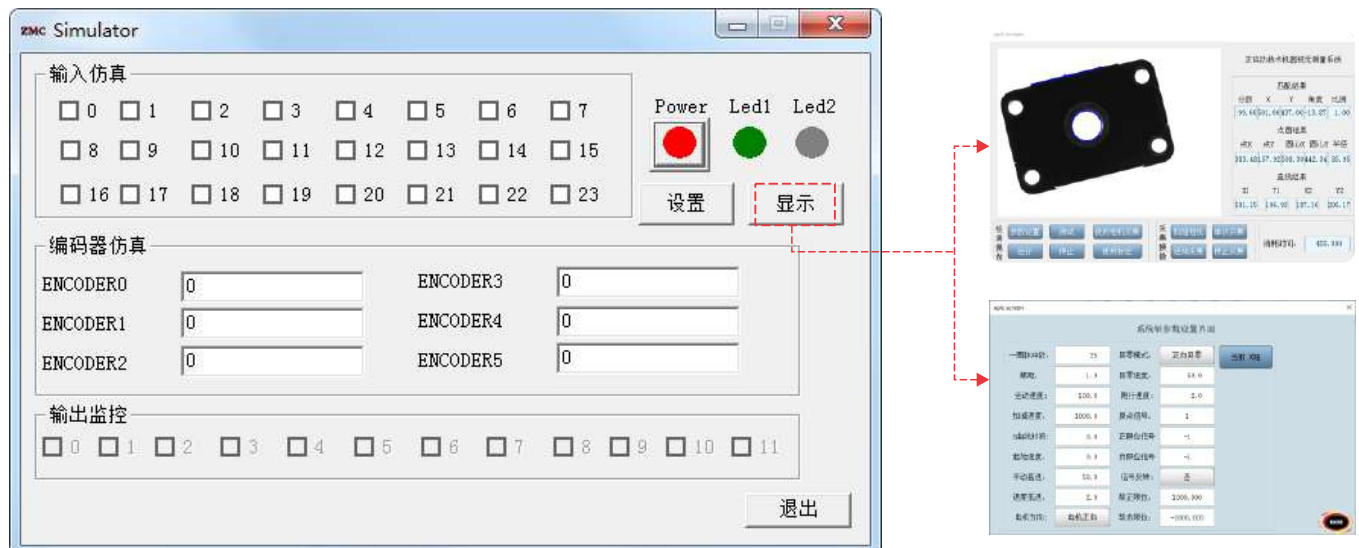


▲ Simulator IP: 127.0.0.1, no controller, it also can debug & diagnose program, including machine vision local image simulation & debugging.

# Programming Languages

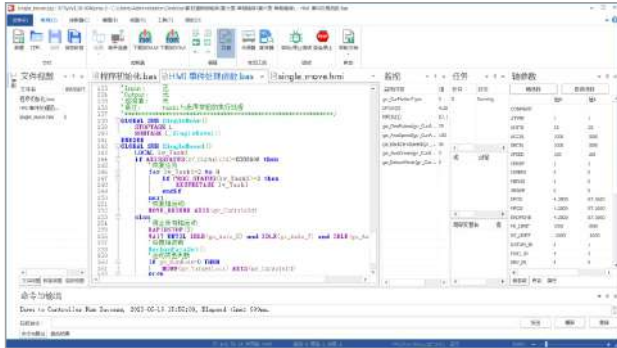

▲ ZBasic (RTBasic)

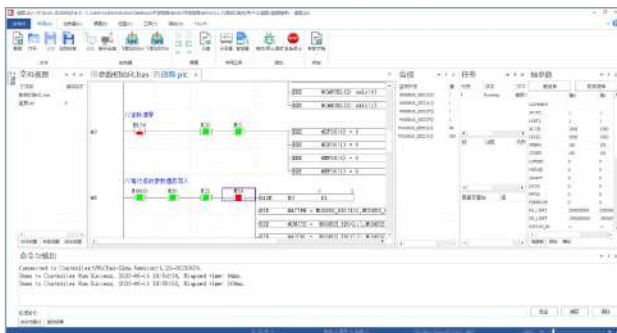

▲ ZPLC (RTPLC)



▲ ZHMI (RTHmi)



▲ XPLC CNC Standard System

## RTBasic

RTBasic is the main programming language for Zmotion motion controllers. It provides all standard program grammars: variable, array, condition judgement, loop, math algorithm. In addition, extended Basic commands & function provide powerful motion control functions: single-axis motion, multi-axis interpolation, synchronous / asynchronous motions, IO & AIO control, etc.

**[Support "self-defined SUB"]** -- edit some general functions as custom SUB. Except this, G code SUB is valid.

**[Support "real-time & multi-task"]** -- several Basic programs can be built and run, then complex applications become easier.

**[Support "interrupt" function]** -- for example, power-down interrupt, which can record the state when power off, namely, convenient to restore after powered on.

"More details, please refer to [Zmotion RTBasic Programming Manual](#)".

You also can learn and test some [examples](#) in RTSys (simulator).

## RTPLC Ladder Diagram

RTPLC is the PLC language for Zmotion motion controller, LAD or instruction list can be used, and the usage is same as market common PLC commands. Therefore, it is easy to program for users who are familiar with PLC.

Support linkage programming between RTPLC and RTBasic .

## RTHmi Configuration

RTHmi is used to develop motion controller corresponding human-interface.

And it can program together with RTBasic & RTPLC when the controller supports HMI function.

In addition, only one time upgrade, HMI program and controller program can be updated synchronously.

"More details, please refer to [Zmotion RTHmi Programming Manual](#)".

You also can learn and test some [examples](#) in RTSys (simulator).

## Custom G Code CNC Standard System

One open-source CNC standard system that is running on programmed RTHmi. You can edit technology program through G code directly. At the same time, you can customize / add required function.

# Development Debug & Diagnosis

- ▶ watch controller running state
- ▶ support RTBasic, RTPLC and RTHMI
- ▶ support manual operation
- ▶ support online debug
- ▶ support simulation (controller & HMI)
- ▶ support multi-task running
- ▶ support oscilloscope
- ▶ support IN & OP
- ▶ support checking registers' data
- ▶ encrypt program, lock controller -- protect user's intellectual property

## Quick & Easy Debugging

Axis	ATYPE	UNITS	ACCEL	DECEL	SPEED	DPOS	Left/Move	Right/Move	DistanceAbsolute	MPOS	IDLE	AXISSTATUS		
0	0	1.000	10000.0	0.000	1000.00	0.000	-	+	<input type="checkbox"/>	Move	0.000	-1	0h	Stop
1	0	1.000	10000.0	0.000	1000.00	0.000	-	+	<input type="checkbox"/>	Move	0.000	-1	0h	Stop
2	0	1.000	10000.0	0.000	1000.00	0.000	-	+	<input type="checkbox"/>	Move	0.000	-1	0h	Stop
3	0	1.000	10000.0	0.000	1000.00	0.000	-	+	<input type="checkbox"/>	Move	0.000	-1	0h	Stop
4	0	1.000	10000.0	0.000	1000.00	0.000	-	+	<input type="checkbox"/>	Move	0.000	-1	0h	Stop
5	0	1.000	10000.0	0.000	1000.00	0.000	-	+	<input type="checkbox"/>	Move	0.000	-1	0h	Stop

▲ Manual | quick to debug axis

AD/DA interface showing channels 0 and 1 with parameters like Channel number, Size, Scale value, Fx set value, Maximum scale, and Fx set Range.

▲ AD/DA | capture & control analog

IN interface showing a table of input states (To use, Tail state, Invert state, Invert enable) for various inputs.

▲ IN | real-time watch IN, custom IO state

Op interface showing a grid of output states (Op0 to Op39) with buttons for each.

▲ OP | real-time watch OUT & output

## High-efficiency & Quick Diagnosis

Scope interface showing a table of data points (Time, Source, Offset, Scale) and a Scope Config window.

▲ Scope | real-time show 8 data & trajectory

Register interface showing a table of registers (DT(0) to DT(9)) and a Register window with Import/Export buttons.

▲ Scope | real-time show 8 data & trajectory

Watch interface showing a table of watch names (SPEED(0), DPOS(0), DPOS(1)) and their values.

▲ Variable | real-time watch variable & custom variable

Task interface showing a table of tasks (Task, State, File Line) and a Stack/Sub/File Line table.

▲ Task | real-time watch tasks

Debug interface showing a ProjectView window with a list of tasks and a Debug window with buttons for Start/Stop, Pause, Step Into, Step Over, Step Out, and Breakpoint.

▲ Debug | set breakpoints, etc.

Axis Parameters interface showing a table of axis parameters (Axis0, Axis1, Axis2) and their states.

▲ Axis Parameters | real-time see axis parameters & states

## Development Debug & Diagnosis

- ▶ watch controller running state
- ▶ support RTBasic, RTPLC and RTHMI
- ▶ support manual operation
- ▶ support online debug
- ▶ support simulation (controller & HMI)
- ▶ support multi-task running
- ▶ support oscilloscope
- ▶ support IN & OP
- ▶ support checking registers' data
- ▶ encrypt program, lock controller -- protect user's intellectual property

### High-efficiency & Quick Diagnosis

Controller State	
VirtualAxes:	64
RealAxes:	64
Tasks:	22
Files/3Files:	111/8
Modbus4x Bits:	8000
Modbus4x Regs:	60000
VR Regs:	8000
TABLE Regs:	320000
RomSize:	125000KB
FlashSize:	262144KB
SoftType:	VPLC5xx-Simu
RTVersion:	5.200-20190611
Build Date:	20240426
IpAddress:	127.0.0.1
HardVersion:	464-0
ControllerID:	1234
ZvlibVersion:	1.5.1-Beta Build(20231228)

▲ BasicInfo: controller basic information

CanID	NodeID	Address	MaxIn	MaxOut	MaxIn	MaxOut
100H	404H (ZPLC404)	84	27 (0-26)	15 (0-15)	0	2 (0-1)

▲ ZCANNodes | node configuration of local controller, IO & AIO by CAN expansion module

SlotID	ModuleID	TerminalID	Alias	Address	MaxIn	MaxOut	MaxIn	MaxOut
--------	----------	------------	-------	---------	-------	--------	-------	--------

▲ Slot0Nodes | node configuration of local controller, IO & AIO of EtherCAT/RTX drive expansion module

### Quick to Upgrade Firmware & User Program

Update Firmware

TypeString:  Hard Version:

SERIAL\_NUMBER:  Soft Version:

Zfm File:

▲ Update Firmware | easy to update firmware for new functions

ZMC TOOLS - ZarDown-链接成功

COM:

IP:

当前控制器信息:

类型: ZMC432 硬件版本: 432-0 固件版本: 4.60-20170522 编号: 170900748

File 文件:

ZarDown

update success 升级成功

▲ Update User Program | ZDevelop generates compiled ZAR file, then users can remote update, also can protect source codes.

### Multiple Encryption -- Protect Your Intellectual Property

01. program only can be downloaded (can't upload)
02. password: oversize character & store by irreversible algorithm

03. controller is with unique No.: it can lock user program, one single controller or several by APP\_PASS.

MakeZar

☐ BindAppPassword  ☒ \*\*\*

☐ BindControllerID

Zar File:

Lock


Warning: The password must be remembered.

Password:  ☒ \*\*\*\*\*

Confirm:


# Motion Commands Easy to Use

## All Kinds of CAM

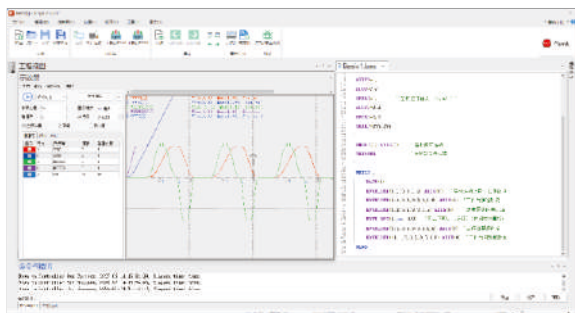


cam, cambox movelink, moveslink  
flexlink, movelink\_modify

## Look-Ahead Modes of Continuous Interpolation

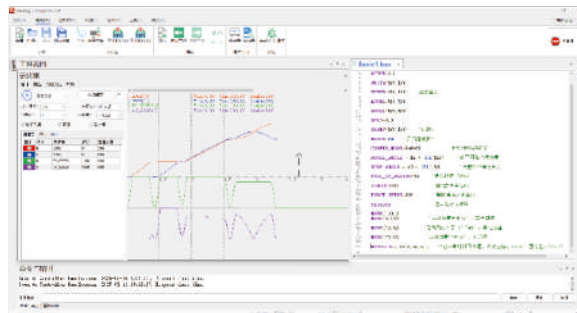

merge corner\_mode decel\_angle stop\_angle  
force\_speed zsmooth full\_sp\_radius

## Software & Hardware Synchronized

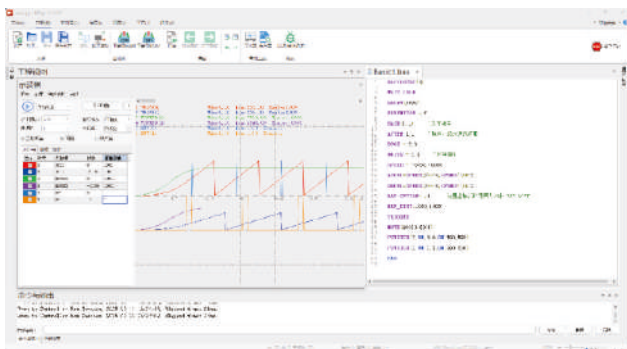

▲ software output synchronously

### Software Synchronized Output

move\_op move\_op2  
move\_table move\_delay  
move\_synmove move\_aout  
move\_asynmove, move\_task  
moveop\_delay, move\_pwm

Hardware Latch Synchronously "regist"  
Hardware Output Synchronously "hw\_pswitch"  
Hardware Timer "hw\_timer"  
Precision Position Output "move\_op"

## Robot Kinematics Algorithms




▲ 30+ robotic forward & inverse kinematics algorithms

30+ robotic forward & inverse kinematics algorithms  
connframe/connreframe  
delta2, delta3, scara, 6-joint robotic arm, etc.




## SCARA Robotic Arm

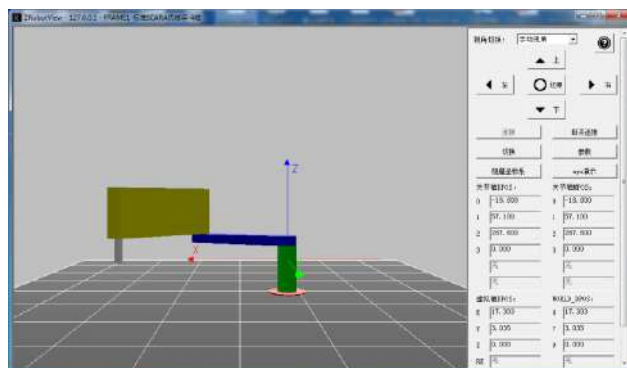

▲ ZRobotView SCARA Robotic Arm Simulation | standard 4-axis SCARA, lifting SCARA, special SCARA, 6 degrees of freedom/palletizing/collaborative/spraying robot, etc.

## Delta Robotic Arm

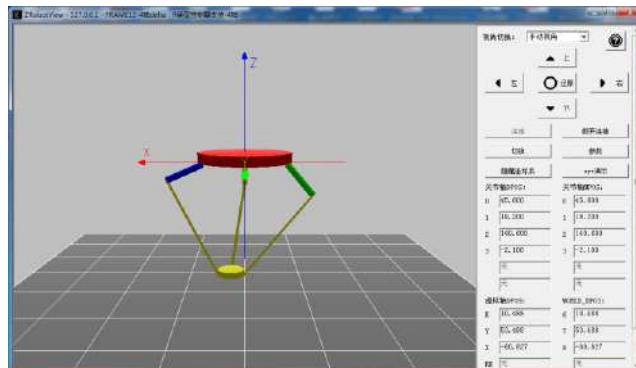

▲ ZRobotView Delta Robotic Arm Simulation | standard 4-axis Delta, 2-axis Delta, 3-axis Delta

# Open G Code ZMotion NC Platform

Zmotion NC is one optional function for ZMC4XX and above controllers. It provides ISO standard G code commands and rich functions, like, multi-channel, cutter compensation, macro process, 3D simulation, preview, etc. And NC processing codes made by different CAD/CAM software are valid, UG. MasterCam, ArtCAM, etc. For G code files, it supports files with suffix ".cnc/.nc". Applications: engraving & milling machine, carving machine, drilling center, etc.

32  
加工文件: 正运动.NC

运行中

AUTO模式

通道一

14:33:03



X-Y

居中

放大

缩小

擦除

机械坐标

X

-37.284

Y

-3.342

Z

19.300

程式坐标

X

-47.284

Y

-13.342

Z

-0.700

加工时间

0: 0: 7

F

600.000

mm/min

0.000

(实际)

S

1000.000

RPM

1000.000

(实际)

剩余距离

X

-0.001

Y

30.269

Z

0.000

<<

关闭模拟

暂停加工

恢复暂停

停止加工

系统复位

单步运行

>>

▶ other file formats can be expanded through "ZG\_EXFILE" command.

## CNC Parser: ISO Standard G Code Instruction Set

G00 X4.296 Y-7.427 Z3.23	;一般格式, 关键字之间以空格区分, “-”代表参数为负
	; “+”代表参数为正数, 默认省略
G00X4.296Y-7.427Z3.23	;无空格区分也可支持, 可观性差些
G00X4.296Y- 7.427Z3.23	;空格出现位置不影响最终识别的代码, 效果同上
G0 X4 Y5 Z3	;可省略关键字参数的前导0, 参数为整数时可不带小数
G0 X.4 Y-.5 Z3.	;可省略小数点前的0, 和小数点后的0
	;等同于 G00 X0.400 Y-0.500 Z3.000
g0 y4 z3 x5	;关键字不区分大小写, 同行关键字的顺序无意义
y4 z3 x5 g0	;但同行代码不能同时出现同组关键字, 如G0、G1、G2
N160 G1 Z.444 F200.	;F200.等同 F200.00, 表示XYZ轴进给速度

- Motion Related: G0, G1, G2, G3...
- Distance Mode: G90, G91
- Tool Tip Radius Compensation: G40, G41, G42
- Tool Length Compensation: G43, G44, G49
- Feed Mode: G94, G95
- Main-Axis Speed Mode: G96, G97
- M Related Functions: M0, M1, M2, M30
- ...

## CNC Parser: Macro-Program

Support type B macro program, including macro variable, macro-operation instruction, macro-control commands.

macro.nc

total:31

line:16

length:17

page: 2 / 3

12 #1 = 0

13 WHILE [#1 LT 90] DO2

14 #2 = 0

15 #7 = #22\*SIN[#1]

16 #8 = #20\*COS[#1]

17 #9 = #21\*COS[#1]


18 WHILE [#2 LE 360] DO1

19 #3 = #8\*COS[#2]

20 #4 = #9\*SIN[#2]

21 G17 G1 X#3 Y#4 Z#7 F3000

22 #2 = #2+5

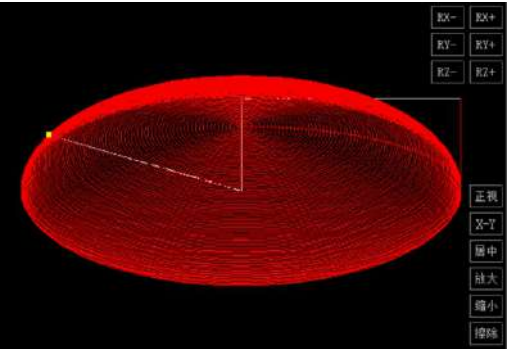

EX-

EX+

EY-

EY+

EZ-

EZ+

正视图

X-Y

居中

放大


缩小

擦除

▲ processing code and processing picture of semi-ellipsoid sphere programmed by macro program.

# ZMotion CAD V2.0 Software Platform


**Zmotion CAD V2.0** is a tool software related to RTSys, which can import graphic files (DXF, PLT, AI) to transfer them into Basic codes / G codes for controller, then download codes into controller or import 3 file into controller, corresponding trajectory can be processed easily.

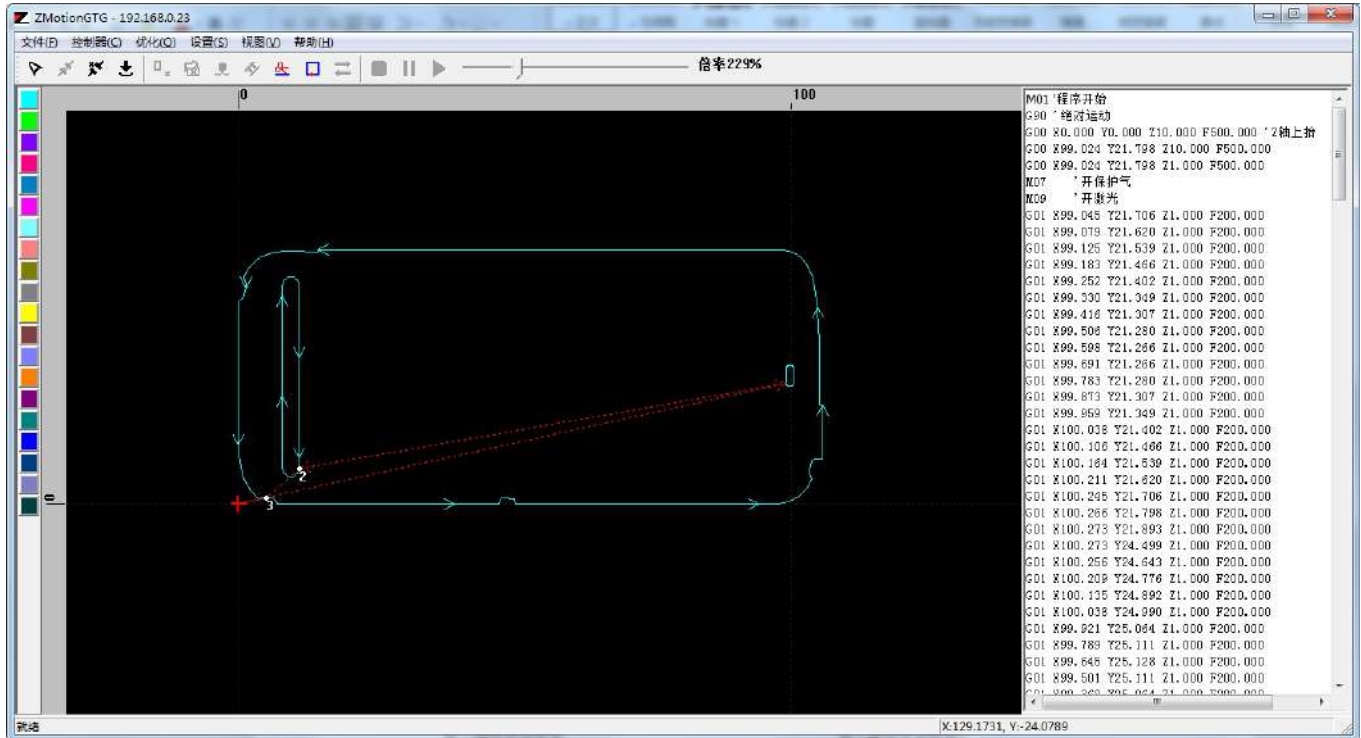

**Optimize Graphic Automatically / Manually: Smooth Curve, Remove Small One, Remove Duplicate Lines, Merge Connected Lines, Sort, Optimize Empty Motion.**



▲ Automatic Optimization

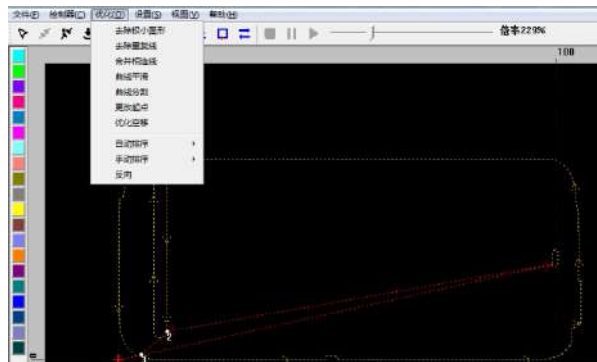


▲ Manual Optimization

**Technology Parameters**



- ▶ it can set processing path's origin.
- ▶ support simulation and information showing.
- ▶ heights of axis Z processing and empty motion can be set freely.
- ▶ absolute / relative control modes.
- ▶ it can add/delete action parameters (self-define) before/after processing.
- ▶ custom graph length precision unit, (reference 0.01-0.5)
- ▶ support look-ahead function, automatic apart arc as segments, corner deceleration, chamfering,

# Motion Controller

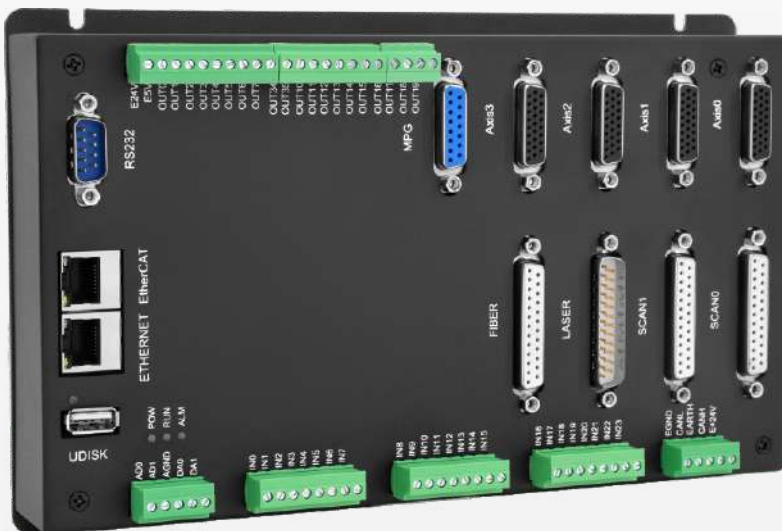


ZMC408SCAN-V22




ZMC432M

# Pulse Controller System Structure

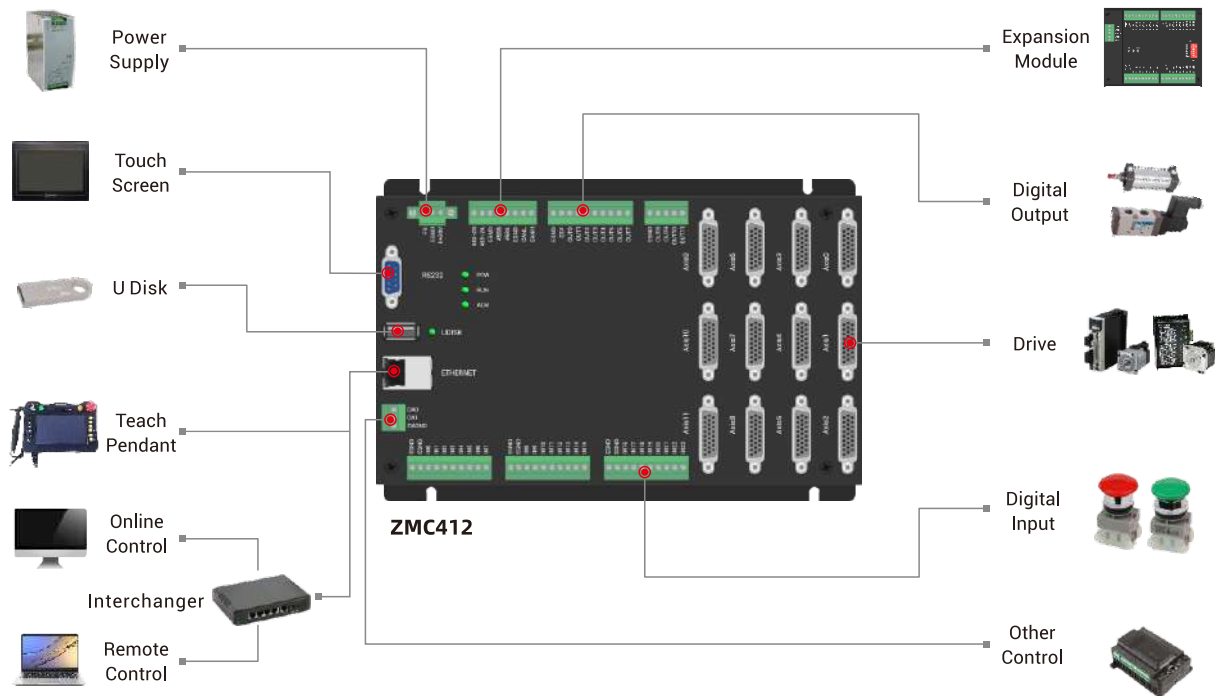

# Bus Controller System Structure

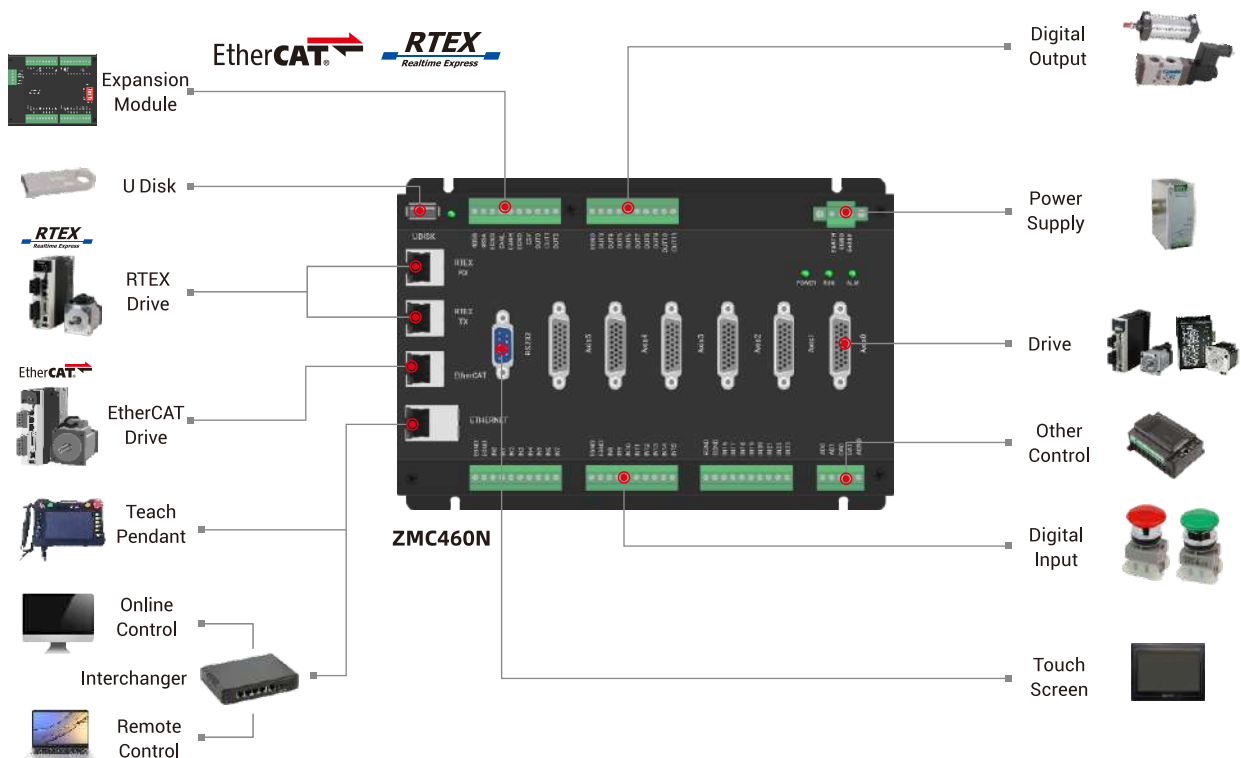



ZMC006CE-V2

# ZMC0XX Controller





ZMC0XX economical multi-axis motion controller is a kind of pulse standalone motion controller. Support up to 6 axes for some simple trajectory control, such as, linear interpolation, circular interpolation, helical interpolation, etc.

**Applications:** pulse within 6-axis -- electronic semiconductor equipment (detection equipment, assembly equipment, locking equipment, soldering machine), dispensing equipment, assembly line, etc.


## Functional Features

- Axis: up to 6-axis (include virtual-axis)
- IO: up to 30 INs & 14 OUTs
- Communication: 2 RS232/RS485 (standard)
- Analog: 2 DAs, max 256 ADs & 128 DAs by ZCAN expansion
- Pulse Mode: directional + pulse/double pulse
- Functions:
  - 01. support encoder input, which can be configured as handwheel mode.
  - 02. support IO expansion by ZCAN, max 256 INs & 256 OUTs synchronously.
  - 03. axis position limit, origin signal can be configured as any IN.
  - 04. max output current is 300mA, which can directly drive some solenoid valve.
  - 05. electronic cam & gear, position latch, synchronous follow, virtual axis, etc.
  - 06. a variety of encryption methods to protect user's program.
- Performance:
  - 01. max output frequency can reach 5MHz.
  - 02. support up to 6 axes for linear / any circular / helical interpolation.


## Models

Models	Image	Axis	En-coder	Pulse Frequency	Inner IN & OUT	Inner AD	Inner DA	Axis Motion Buffer	Space	Task	Power Down Store	232	485	ECAT	USB	Size (mm)	Functional Description
ZMC004BEA-V2		4	2	500k (single-ended)	16/16	2	2	32	380k	8	1024	2	1	1	-	177*122	point, line, arc, cam, continuous interpolation
ZMC004WEA-V2		4	2	500k (single-ended)	16/16	2	2	32	380k	8	1024	2	1	1	-	177*122	point, line, arc, cam, continuous interpolation
ZMC004CE-V2		4	1	5M	30/14	-	2	128	300K	10	1024	2	1	1	1	226*127	point, line, arc, cam, continuous interpolation
ZMC006CE-V2		6	1	5M	30/14	-	2	128	300k	10	1024	2	1	1	1	226*127	point, line, arc, cam, continuous interpolation

## Interfaces

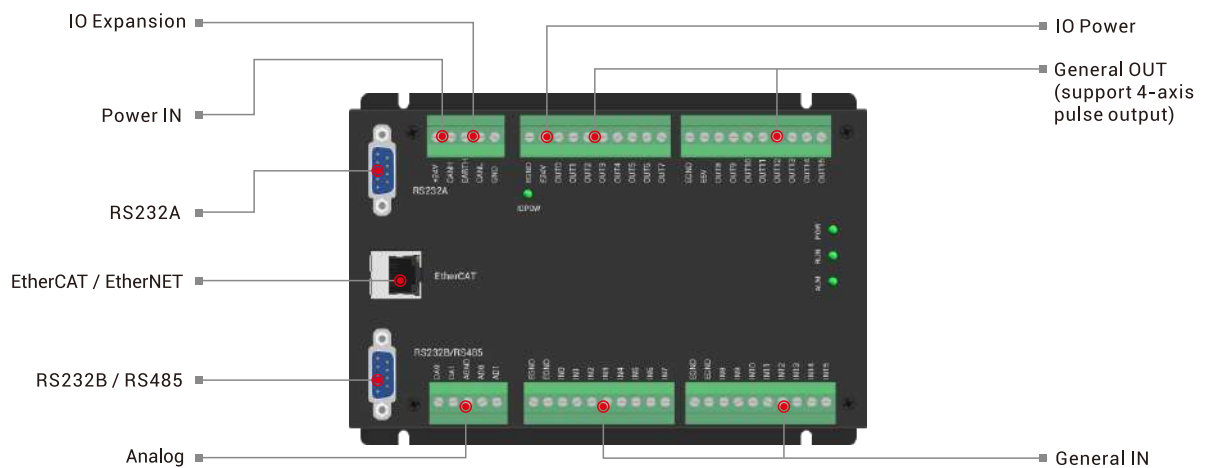


ZMC004WEA-V2



PIN No.	Encoder Method	Description
1	EA+	Encoder A +
2	EA-	Encoder A -
3	EB+	Encoder B +
4	EB-	Encoder B -
5	GND	Internal 0V
6	EZ+	Encoder Z +
7	EZ-	Encoder Z -
8	Internal +5V Power Supply	Internal +5V Power
9	-	-


▲ Encoder Interface (DB9 Male Head) ZMC006CE-V2



PIN No.	Name	Description
1	PUL+	Pulse Differential +
2	PUL-	Pulse Differential -
3	DIR+	Directional Differential +
4	DIR-	Directional Differential -
5	GND	Inner 0V
6	ALM(IN24-29)	General IN, Recommend for Drive Alarm
7	SERVON(OUT8-13)	General OUT, Recommend for Drive Enable
8	Internal +5V Power	Internal +5V Power
9	EGND	External Ground

▲ Pulse-Axis (DB9 Female Head) ZMC006CE-V2

Note: refer to "User Manual" for more models and details.

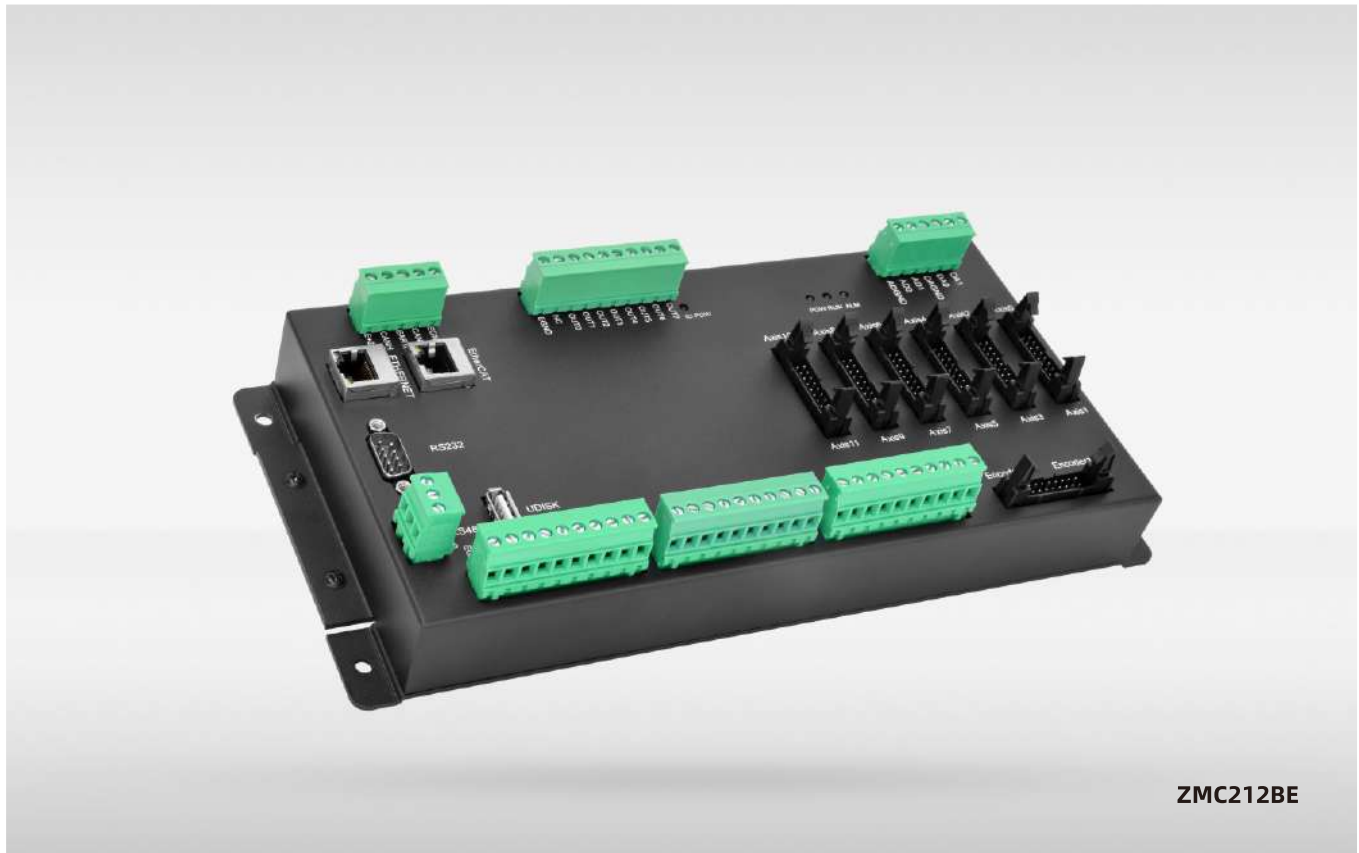

## ZMC2XX Controller



[ZMC2XX](#) economical multi-axis motion controller is a kind of standalone motion controller, there are pulse and bus types. Support up to 12 axes, 16 axes can be extended for complex trajectory control, such as, linear interpolation, any circular / space arc interpolation, helical interpolation, ellipse interpolation, etc.

Applications: electronic semiconductor equipment (detection, assembly, locking, soldering), dispensing, non-standard, printing & packaging, textile & garment, medical equipment, assembly line, etc.



### Functional Features

- Axis: up to 16-axis (include virtual-axis)
- IO: 24 INs & 8 OUTs
- Communication: RS232, RS485, USB, EtherNET
- Analog: 2 DAs & 2 DAs, max 256 ADs & 128 DAs by ZCAN expansion
- Pulse Mode: directional + pulse/double pulse
- Functions:
  01. support encoder input, which can be configured as handwheel mode.
  02. support IO expansion by ZCAN, max 512 INs & 512 OUTs synchronously.
  03. axis position limit, origin signal can be configured as any IN.
  04. electronic cam & gear, position latch, synchronous follow, virtual axis, comparison output, etc.
  05. max output current is 300mA, it can directly drive some solenoid valve.
  06. support multi-file & multi-task, and PC programs & controller internal programs can work synchronously.
  07. a variety of encryption methods to protect user's program.
  08. support power failure detection & power failure storage.
- Performance:
  01. max output frequency can reach 10MHz.
  02. max 16 axes for linear/any circular/arc/helical/elliptic interpolation.
  03. support multi-machine independent continuous interpolation.

## Models

Model	Image	Axis	En-coder	Pulse Frequency	Inner IN & OUT	Inner AD	Inner DA	Axis Motion Buffer	Space	Task	Power Down Store	232	485	Net	ECAT	USB	Size (mm)	Functional Description
ZMC212B		12	2	10M	24/8	2	2	512	460k	13	1024	1	1	1	-	1	280*127	point, line, arc, cam, continuous interpolation, robotic arm commands
ZMC212BE		12	2	10M	24/8	2	2	512	460k	13	1024	1	1	1	1	1	280*127	point, line, arc, cam, continuous interpolation, robotic arm commands

## Interfaces

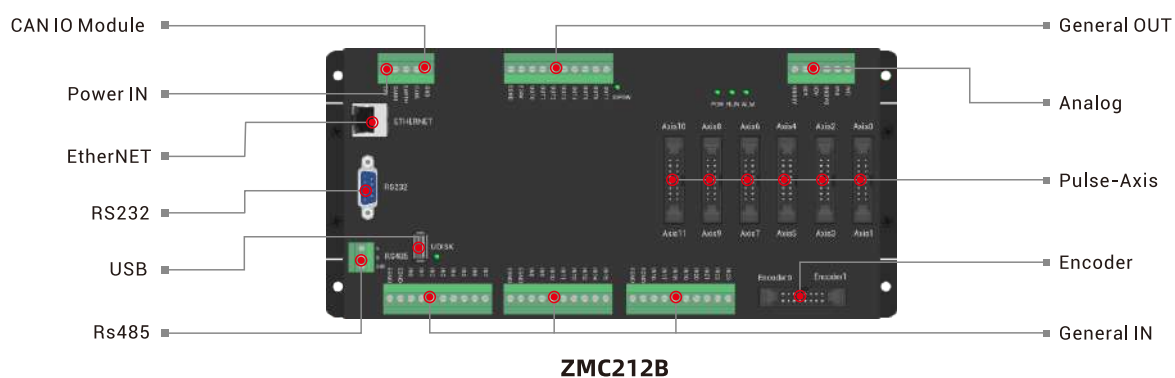

PIN NO.	Pulse Output Method Name	Encoder Method Name
1	PUL1 + (Pulse Differential+)	Ea1 + (Encoder Differential+)
2	PUL1 - (Pulse Differential-)	EA1 - (Encoder Differential-)
3	DIR1 + (Directional Differential+)	EB1 + (Encoder Differential+)
4	DIR1 - (Direction Differential-)	EB1 - (Encoder Differential-)
5	Inner 0V	Inner 0 V
6	-	EZ1 + (Encoder Differential+)
7	-	EZ1 - (Encoder Differential-)
8	Internal +5V Power	Internal +5V Power
9	PULO + (Pulse Differential+)	EA0 + (Encoder Differential+)
10	PULO - (Pulse Differential-)	EA0 - (Encoder Differential-)
11	DIRO + (Direction Differential+)	EB0 + (Encoder Differential+)
12	DIRO - (Direction Differential-)	EB0 - (Encoder Differential-)
13	Inner 0V	Inner 0V
14	-	EZ0 + (Encoder Differential+)
15	-	EZ0 - (Encoder Differential-)
16	Internal +5V Power	Internal +5V Power

▲ Pulse-Axis (16 PIN Horn) ZMC212B

Note: refer to "User Manual" for more models and details.



ZMC316BE

## ZMC3XX -- Pulse

[ZMC3XX](#) high-performance multi-axis motion controller is a kind of pulse standalone motion controller. Itself supports max 16 axes, but 24 axes can be expanded to realize complex continuous trajectory control.

**Applications:** robot (SCARA, Delta, 6-joint), electronic semiconductor equipment (detection, assembly, locking, soldering), dispensing, non-standard, printing & packaging, textile & garment, stage entertainment equipment, medical equipment, assembly line, etc.

### Functional Features:

- Axis: up to 32axis (include virtual-axis)
- IO: up to 48 INs & 32 OUTs
- Communication: RS232, RS485, RS422, USB, EtherNET.
- Analog: 4 ADs & 2 DAs, max 256 ADs & 128 DAs by ZCAN expansion
- Pulse Mode: directional + pulse / double pulse
- Functions:
  01. support encoder input, which can be configured as handwheel mode.
  02. support IO expansion by ZCAN, max 512 INs & 512 OUTs synchronously.
  03. axis position limit, origin signal can be configured as any IN.
  04. max output current is 300mA, which can directly drive some solenoid valve.
  05. electronic cam & gear, position latch, synchronization, virtual axis, comparison output
  06. support multi-file & multi-task, programs of PC, controller can work synchronously.
  07. a variety of encryption methods to protect user's program.
  08. support power failure detection & power failure storage.
  09. support several robotic arm algorithms (SCARA, Delta).
  10. support pulse closed-loop, pitch compensation, etc.
- Performance:
  01. max output frequency can reach 10MHz.
  02. support up to 16 axes for linear/any circular/space arc/helical/elliptic interpolation.
  03. support multi-machine independent continuous interpolation.

## ZMC3XX -- Bus












ZMC3E/N high-performance multi-axis motion controller supports EtherCAT bus (N: dual-bus of EtherCAT & RTEX) and pulse. Itself supports max 16 axes (EtherCAT / RTEX + pulse), but 24 axes can be expanded to realize complex continuous trajectory control.


### Functional Features:

- Axis: up to 22-axis (include virtual-axis)
- IO: up to 52 INs & 28 OUTs
- Communication: RS232, RS485, RS422, USB, EtherNET, EtherCAT / EtherCAT & RTEX
- Analog: 2 DAs & 2 ADs, max 256 ADs & 128 DAs by ZCAN expansion
- Pulse Mode: directional + pulse / double pulse
- Functions:
  01. support encoder input, which can be configured as handwheel mode.
  02. support IO expansion by ZCAN, max 512 INs & 512 OUTs synchronously.
  03. axis position limit, origin signal can be configured as any IN.
  04. max output current is 300mA, which can directly drive some solenoid valve.
  05. electronic cam & gear, position latch, synchronous follow, virtual axis, etc.
  06. hardware comparison output, hardware timer, precision output in motion.
  07. support multi-file & multi-task, PC & controller's programs work synchronously.
  08. a variety of encryption methods to protect user's program.
  09. support power failure detection & power failure storage.
  10. support several robotic arm algorithms (SCARA, Delta).
  11. support pulse closed-loop, pitch compensation, etc.
- Performance:
  01. EtherCAT fastest refresh cycle is 500μs.
  02. max output frequency can reach 10MHz.
  03. support max 12 axes for linear/any circular/arc/helical/spline interpolation.
  04. support multi-machine independent continuous interpolation.

## Models

Model	Image	Axis	En-coder	Pulse Frequency	Inner IN & OUT	Inner AD	Inner DA	Axis Motion Buffer	Space	Task	Power Down Store	232	422	485	Net	ECAT	RTEX	USB	Size (mm)	Functional Description
ZMC303		3	3+1	10M	24+3/8+3	2	2	64	300k	10	1024	1	1	1	1	-	-	1	205*134	point, line, arc, cam, continuous interpolation, robotic arm commands
ZMC304		4	4+1	10M	24+4/8+4	2	2	128	300k	10	1024	1	1	1	1	-	-	1	205*134	point, line, arc, cam, continuous interpolation, robotic arm commands
ZMC304X		4	4	10M	24+4/12+4	2	2	128	2000k	12	1024	1	1	1	1	-	-	1	205*134	point, line, arc, cam, continuous interpolation, robotic arm commands
ZMC306X		6	6	10M	24+6/12+6	2	2	128	2000k	12	1024	1	1	1	1	-	-	1	205*134	point, line, arc, cam, continuous interpolation, robotic arm commands
ZMC306E		6	2	10M	24+2/16+2	2	2	512	6144k	10	1024	1	1	1	1	1	-	1	205*135	point, line, arc, cam, continuous interpolation, robotic arm commands
ZMC306N		6	2	10M	24+2/16+2	2	2	512	6144k	10	1024	1	1	1	1	1	1	1	205*135	point, line, arc, cam, continuous interpolation, robotic arm commands
ZMC306BE		6	6	10M	40+12/16+12	4	2	128	2000k	15	1024	1	1	1	1	1	-	1	292*188	point, line, arc, cam, continuous interpolation, robotic arm commands
ZMC308BE		8	8	10M	40+16/16+16	4	2	128	2000k	15	1024	1	1	1	1	1	-	1	292*188	point, line, arc, cam, continuous interpolation, robotic arm commands
ZMC316BE		15+1	3	10M	24+15/8+15	2	2	512	16M	18	1024	1	1	1	1	1	-	1	241*149	point, line, arc, cam, continuous interpolation, robotic arm commands

## Interfaces

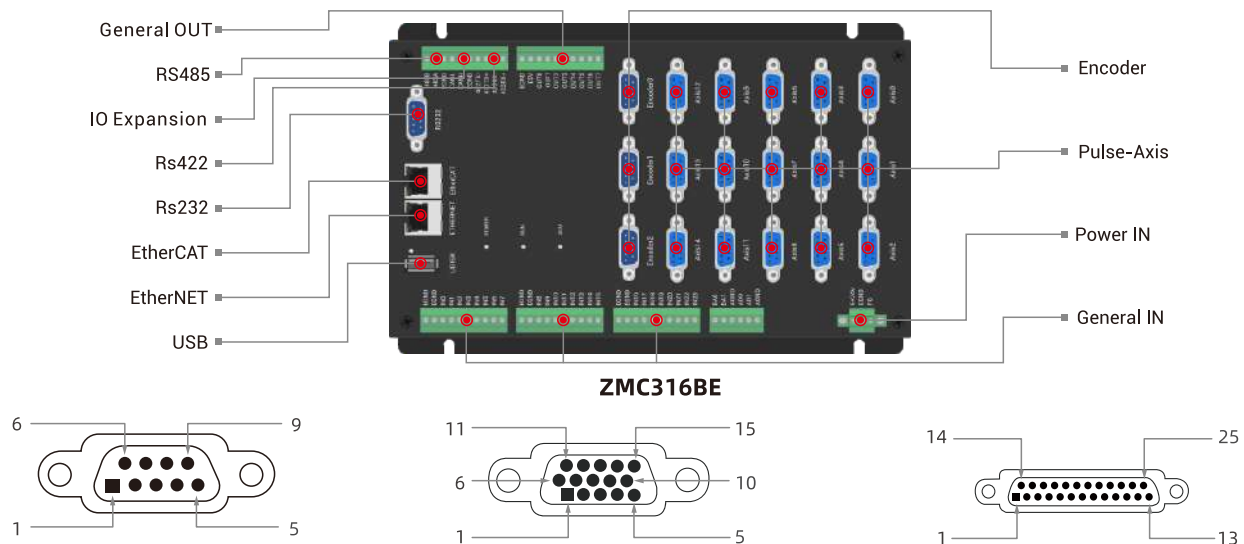

PIN No.	Name	Description
1	PUL+	Pulse Differential+
2	PUL-	Pulse Differential-
3	DIR+	Directional Differential+
4	DIR-	Directional Differential-
5	GND	Inner 0V
6	IN24-38/ALM	General IN (Recommend do drive alarm)
7	OUT8-22/ENA	General OUT (Recommend do drive enable)
8	5V	Internal 5V
9	EGND	External Ground

▲ Pulse-Axis (DB9 Female Head) ZMC316BE

PIN No.	Pulse Out Method	Description
1	PUL+	Pulse Differential +
2	DIR+	Directional Differential +
3	GND	Inner 0V
4	EA+	Encoder Phase A+
5	EB+	Encoder Phase B+
6	EZ+	Encoder Phase Z+
7	ALM(IN24-29)	General IN (Recommend do drive alarm)
8	EGND	External Ground
9	PUL-	Pulse Differential-
10	DIR-	Directional Differential-
11	Internal +5V Power	Internal +5V Power
12	EA-	Encoder A-
13	EB-	Encoder B-
14	EZ-	Encoder Z-
15	SERVON(OUT8-13)	General OUT (Recommend do drive enable)

▲ Pulse-Axis &amp; Encoder (DB15 Female Head) ZMC303/304

PIN No.	Name	Description
1	EGND	External Power Ground
2	IN40-47/ALM	IN, better do Drive Alarm
3	OUT16 18.../ENABLE	OUT, better Drive Enable
4	EA-	Encoder A-
5	EB-	Encoder B-
6	EZ-	Encoder Z-
7	Internal+5V	Internal +5V Power
8	Reserved	Reserved
9	DIR+	Directional Differential+
10	GND	Inner 0V
11	PUL-	Pulse Differential-
12	Reserved	Reserved
13	GND	Inner 0V
14	OVCC	+24V
15	OUT17 19.../CLR	OUT, better Drive Alarm Clear
16	IN48-55/INP	IN, better on-position signals
17	EA+	Encoder A+
18	EB+	Encoder B+
19	EZ+	Encoder Z+
20	GND	Internal 0V
21	GND	Internal 0V
22	DIR-	Directional Differential -
23	PUL+	Pulse Differential +
24	GND	Internal 0V
25	Reserved	Reserved

▲ Pulse-Axis &amp; Encoder (DB25 Female Head) ZMC306BE/308BE

Note: refer to "User Manual" for more models and details.




# ZMC308H



ZMC308H high-performance multi-axis motion controller is one standalone controller that supports EtherCAT bus and pulse axis. Itself supports max 8 axes for complex continuous trajectory control.

**Applications:** SCARA robot, electronic semiconductor equipment (detection, assembly, locking, soldering), dispensing, printing & packaging, textile & garment, stage entertainment equipment, medical equipment, assembly line, etc.

## Interfaces

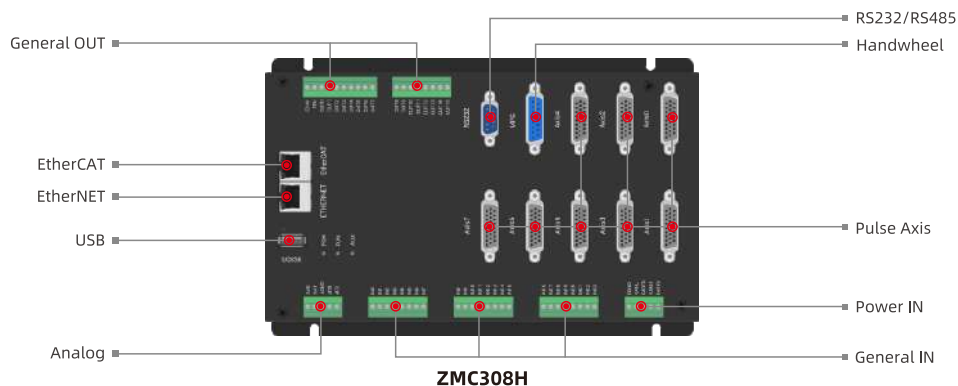

## Functional Features

- Axis: up to 32-axis (include virtual-axis)
- IO: up to 48 INs & 32 OUTs
- Communication: RS232, RS485, RS422, USB, EtherNET.
- Analog: 4 ADs & 2 DAs, max 256 ADs & 128 DAs by ZCAN expansion
- Pulse Mode: directional + pulse / double pulse
- Functions:
  - 01. support encoder input, it can be configured as handwheel mode.
  - 02. interfaces: EtherCAT, single-ended pulse, differential pulse, differential encoder.
  - 03. support high-speed latch, PWM, also HW is valid (precision comparison output)
  - 04. 5V/24V laser specialized PWM output port (ZMC305HL5/ZMC308HL24)
  - 05. point motion, electronic cam, linear & circular & continuous interpolation, Scara.
  - 06. Linux system is built in.
- Performance:
  - 01. max pulse output frequency can reach 10MHz.
  - 02. up to 16 axes for linear / any circular / space arc / helical / elliptic interpolation.
  - 03. support multi-machine independent continuous interpolation.




## ZMC432H/ZMC432HG

EtherCAT®

[ZMC432H](#) high-performance multi-axis motion controller is one standalone controller that supports EtherCAT bus and pulse axis, and its hardware & software are national produced. Itself supports max 32 axes for complex continuous trajectory control.


**Applications:** robot (SCARA, Delta, 6-joint), electronic semiconductor equipment (detection, assembly, locking, soldering), dispensing, non-standard equipment, printing & packaging, textile & garment, stage entertainment equipment, medical equipment, assembly line, etc.

### Interfaces

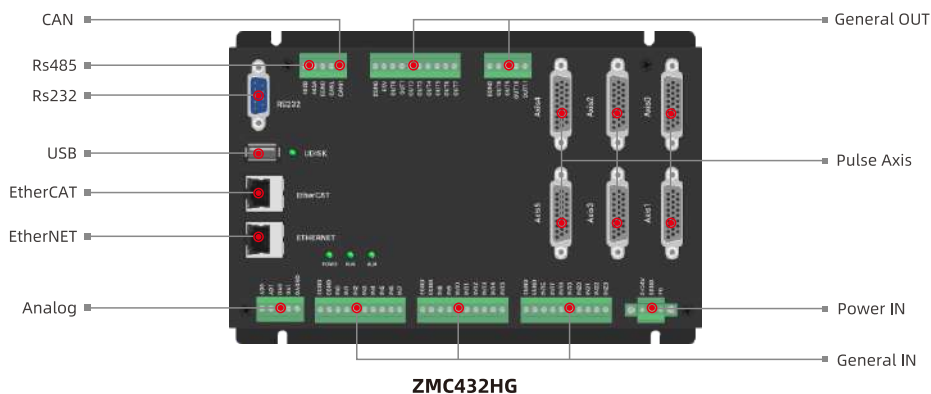

### Functional Features

- Axis: up to 32-axis (include virtual-axis)
- IO: up to 48 INs & 32 OUTs
- Communication: RS232, RS485, RS422, USB, EtherNET.
- Analog: 4 ADs & 2 DAs, max 256 ADs & 128 DAs by ZCAN expansion
- Pulse Mode: directional + pulse / double pulse or orthogonal pulse
- Functions:
  01. support Zmotion XPLC function -- configuration display by network
  02. max pulse output frequency of each axis is 10MHz
  03. max 4096 INs & 4096 OUTs by ZCAN or EtherCAT
  04. axis position limit signal / origin signal can be set as any IN.
  05. max current of OUT can reach 300mA, it can directly drive some solenoid valves.
  06. electronic cam & gear, position latch, synchronization, virtual axis.
  07. hardware comparison output (HW\_PSWITCH2), hardware timer, precision output in motion.
  08. support pulse closed-loop, pitch compensation.
  09. support Basic multi-file & multi-task programming.
  10. a variety of program encryption methods to protect your intellectual property rights.
  11. support power failure detection, power failure storage.
- Performance:
  01. max pulse output frequency can reach 10MHz.
  02. support up to 32 axes for linear / any circular / helical / spline interpolation.
  03. support multi-machine independent continuous interpolation.

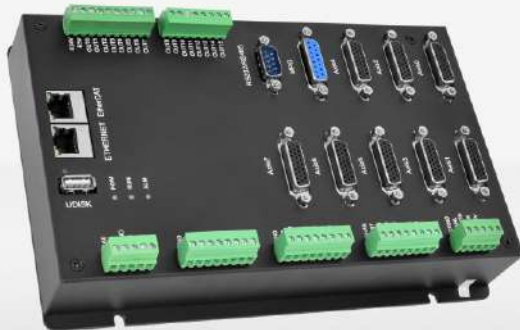

ZMC408CE



ZMC460N

## ZMC4XX – Pulse

[ZMC4XX](#) high-performance multi-axis motion controller is a kind of pulse standalone motion controller. Itself supports max 12 axes, but 32 axes can be expanded to realize complex continuous trajectory control.

**Applications:** robot (SCARA, Delta, 6-joint), electronic semiconductor equipment (detection, assembly, locking, soldering), dispensing, laser, non-standard, printing & packaging, textile & garment, stage entertainment equipment, medical equipment, assembly line, etc.

### Functional Features

- Axis: up to 32-axis (include virtual-axis)
- IO: up to 36 INs & 24 OUTs
- Communication: RS232, RS485, USB, EtherNET.
- Analog: 2 DAs, max 256 ADs & 128 DAs by ZCAN expansion
- Pulse Mode: directional + pulse / double pulse / quadrature pulse
- Functions:
  01. support encoder input, which can be configured as handwheel mode.
  02. support IO expansion by ZCAN, max 512 INs & 512 OUTs synchronously.
  03. axis position limit, origin signal can be configured as any IN.
  04. max output current is 300mA, which can directly drive some solenoid valve.
  05. electronic cam & gear, position latch, synchronization, virtual axis, comparison output.
  06. pulse closed-loop, pitch compensation, hardware comparison output (HW\_PSWITCH2), hardware timer, precision output in motion, etc.
  07. support multi-file & multi-task, PC & controller's program work synchronously.
  08. a variety of encryption methods to protect user's program.
  09. support power failure detection & power failure storage.
  10. support several robotic arm algorithms (SCARA, Delta).
  11. support 2 PWM outputs with 1M frequency.
- Performance:
  01. max output frequency can reach 10MHz.
  02. support up to 16 axes for linear/any circular/space arc/helical/elliptic interpolation.
  03. support multi-machine independent continuous interpolation.

## ZMC4XX – Bus













[ZMC4XX](#) high-performance multi-axis standalone motion controller supports EtherCAT bus (N: dual-bus of EtherCAT & RTEX) and pulse. Itself supports max 64 axes EtherCAT (/60 axes RTEX) to realize complex continuous trajectory control.

### Functional Features


- Axis: up to 64-axis EtherCAT
- IO: up to 40 INs & 32 OUTs
- Communication: RS232, RS485, USB, EtherNET, EtherCAT / EtherCAT & RTEX
- Analog: 2 DAs, max 256 ADs & 128 DAs by ZCAN expansion
- Pulse Mode: directional + pulse / double pulse / quadrature pulse
- Functions:
  01. support encoder input, which can be configured as handwheel mode.
  02. support IO expansion by ZCAN, max 512 INs & 512 OUTs synchronously.
  03. axis position limit, origin signal can be configured as any IN.
  04. max output current is 300mA, which can directly drive some solenoid valve.
  05. electronic cam & gear, position latch, synchronization, virtual axis, comparison out.
  06. support pulse closed-loop, pitch compensation, hardware comparison output (HW\_PSWITCH2), hardware timer, precision output in motion, etc.
  07. support multi-file (62) & multi-task (22), PC program and controller inner program can work at the same time.
  08. a variety of encryption methods to protect user's program.
  09. support power failure detection & power failure storage.
  10. support several robotic arm algorithms (SCARA, Delta).
  11. support 12 PWM outputs with 1M frequency.
- Performance:
  01. EtherCAT fastest refresh cycle (within 16-axis) is 100µs.
  02. max output frequency can reach 10MHz.
  03. support up to 16 axes for linear/any circular/arc/helical/elliptic interpolation.
  04. support multi-machine independent continuous interpolation.
  05. mix interpolation of EtherCAT/RTEX multi-bus-axis + pulse axis.

## Models

Model	Image	Axis	En-coder	Pulse Frequency	Hand-wheel	Inner IN & OUT	Inner AD	Inner DA	Axis Motion Buffer	Space	Task	Power Down Store	232	485	Net	ECAT	RTEX	USB	Size (mm)	Functional Description
ZMC406-V2		6	6	10M	-	24+6/12+6	-	2	4096	32M	22	8000	1	1	1	1	-	1	205*136	point, line, arc, cam, continuous interpolation, robotic arm commands
ZMC408CE		8	8	10M	1	24+16/16+16	2	2	4096	32M	22	8000	1	1	1	1	-	1	221*144	point, line, arc, cam, continuous interpolation, robotic arm commands
ZMC412		12	12	10M	-	24+12/12+12	-	2	4096	32M	22	8000	1	2	1	-	-	1	250*164	point, line, arc, cam, continuous interpolation, robotic arm commands
ZMC416BE		15+1	3+1	10M	-	24+15/8+15	2	2	4096	64M	22	8000	1	1	1	1	-	1	241*149	point, line, arc, cam, continuous interpolation, robotic arm commands
ZMC432-V2		32	6+1	10M	-	24+6/12+6	-	2	4096	32M	22	8000	1	1	1	1	-	1	205*136	point, line, arc, cam, continuous interpolation, robotic arm commands
ZMC432H		32	6	10M	-	24+12/12+12	2	2	4096	32M	22	8000	1	1	1	1	-	1	205*136	point, line, arc, cam, continuous interpolation, robotic arm commands
ZMC432N		32	6	10M	-	24+6/12+6	-	2	4096	32M	22	8000	1	1	1	-	1	1	216*146	point, line, arc, cam, continuous interpolation, robotic arm commands
ZMC464		64	3+2	10M	-	24+3/12+3	-	2	4096	32M	22	8000	1	1	1	1	-	1	205*136	point, line, arc, cam, continuous interpolation, robotic arm commands
ZMC430N		30	6+4	10M	-	24+6/12+6	2	2	4096	32M	22	8000	1	1	1	1	0/1	1	216*143	point, line, arc, cam, continuous interpolation, robotic arm commands
ZMC460N		60	6+4	10M	-	24+6/12+6	2	2	4096	32M	22	8000	1	1	1	1	0/1	1	216*143	point, line, arc, cam, continuous interpolation, robotic arm commands

Note: ZMC430, ZMC460 only support EtherCAT. ZMC430N, ZMC460N support EtherCAT and RTEX.

## Interfaces

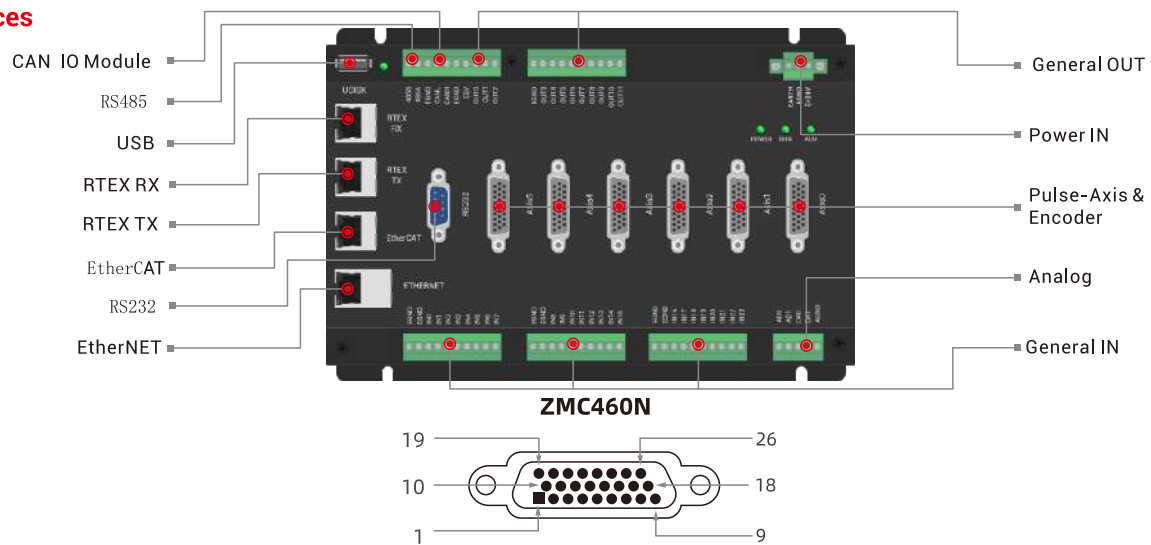

PIN No.	Signal	Description	PIN No.	Signal	Description
1	EGND	External Power Ground	14	OVCC	E+24V OUT (better only for servo IO)
2	IN24-29/ALM	IN, recommended to rive alarm	15	Reserved	Reserved
3	OUT12-17/ENABLE	OUT, recommended to drive enable	16	Reserved	Reserved
4	EA-	Encoder Input	17	EA+	Encoder Input
5	EB-	Encoder Input	18	EB+	Encoder Input
6	EZ-	Encoder Input	19	EZ+	Encoder Input
7	+5V	Power Output	20	GND	Internal Power Ground
8	Reserved	Reserved	21	GND	Internal Power Ground
9	DIR+	Servo / Stepper Directional Output	22	DIR-	Servo / Stepper Directional Output
10	GND	Internal Power Ground	23	PUL+	Servo / Stepper Pulse Output
11	PUL-	Servo / Stepper Pulse Output	24	GND	Internal Power Ground
12	Reserved	Reserved	25	Reserved	Reserved
13	GND	Internal Power Ground	26	Reserved	Reserved

▲ Pulse-Axis & Encoder (DB26 Female Head) ZMC4XX

Note: refer to "User Manual" for more models and details.



ZMC432M

## ZMC432M Series

EtherCAT®

[ZMC432M](#) high-performance multi-axis motion controller is a EtherCAT vertical modular motion controller, which supports RTBasic, PLC programming. It supports 32 axes (EtherCAT + pulse  $\leq$  32) at most.




Valid Motion Control Functions: point, electronic cam, linear, circular, continuous interpolation, laser PWM, robot algorithm.

Applications: electronic semiconductor equipment (detection, assembly, locking, soldering), dispensing equipment, laser processing device, printing & packaging, textile & garment, medical equipment, assembly line, industrial robot, etc.


### Functional Features:

- **Axis:** up to 32-axis motion control (EtherCAT + 8 single-ended pulse axes)
- **IO:** 16 INs & 16 OUTs -- (4 single-ended encoder IN, 4 high-speed latch, 4 high-speed hardware position comparison output, 4 general PWM)
- **Communication:** RS232, RS485, EtherNET, EtherCAT
- **Analog:** 2 ADs, 2 DAs
- **Pulse Mode:** directional + pulse
- **Functions:**
  01. max 4096 INs & 4096 OUTs are extend by CAN /EtherCAT synchronously.
  02. support encoder input, which can be configured as handwheel mode.
  03. axis position limit, origin signal can be configured as any IN.
  04. max output current is 300mA, which can directly drive some solenoid valve.
  05. electronic cam & gear, latch, synchronization, virtual axis, comparison out.
  06. support pulse closed-loop, pitch compensation, hard comparison output (HW\_PSWITCH2), hardware timer, precision output in motion, etc.
  07. support multi-file (62) & multi-task (22), and PC program & controller inner program can work at the same time.
  08. a variety of encryption methods to protect user's program.
  09. support power failure detection & power failure storage.
  10. several robotic arm algorithms (SCARA, Delta) of R model.
- **Performance:**
  01. EtherCAT fastest refresh cycle is 125 $\mu$ s.
  02. support hybrid interpolation of EtherCAT and pulse.
  03. U disk can read & write files, and upgrade program, then it is convenient to remote maintain.
  04. support PLC, RTBasic, RTHmi programming, and all kinds of PC programming languages are OK.
  05. support point, synchronous motion, motion superposition, electronic cam, linear, circular, continuous interpolation.

## Models

Models	Image	Axis	En-coder	Pulse Fre	Inner IN & OUT	Inner AD	Inner DA	Axis Motion Buffer	Pro Space	Tasks	Power Down Save	232	485	Ether Net	ECAT	USB	Size (mm)	Functions
ZMC408M		8	4	500k	16/16	2	2	4096	32M	22	8000	1	1	1	1	1	95*46	point, line, arc, cam, continuous trajectory, robotic arm
ZMC432M-16		16	4	500k	16/16	2	2	4096	32M	22	8000	1	1	1	1	1	95*46	point, line, arc, cam, continuous trajectory, robotic arm
ZMC432M		32	4	500k	16/16	2	2	4096	128M	22	8000	1	1	1	1	1	95*46	point, line, arc, cam, continuous trajectory, robotic arm

## Interfaces

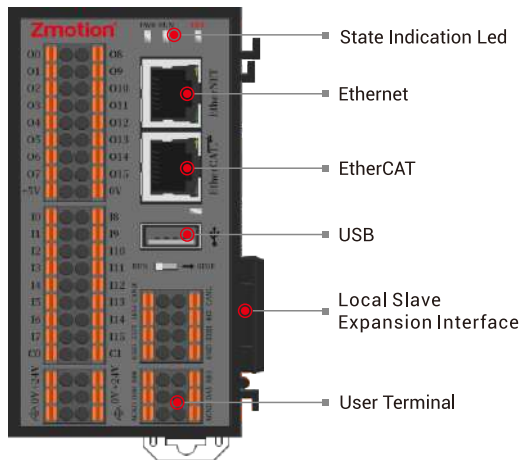


No.	Interfaces	Functions			
1	State Indication Led	POW	Power Led	Green	power conducted – ON
		RUN	Running Led	Green	run normally – ON
		ERR	Error Led	Red	run error – ON
2	U Disk	standard USB, connect to U disk			
3	EtherNET	standard Ethernet, connect to PC / ethernet devices			
4	EtherCAT	standard EtherCAT, connect to EtherCAT slave station			
5	User Terminal	power, Rs232, Rs485, CAN, ADC, DAC, 16DI, 16DO			
6	Local Slave Port	connect to slave sub-expansion, don't hot-plugging			

Note: please check each controller user manual.


## How to Install

Connect to ZMIO310 sub-expansion by local slave expansion interface.

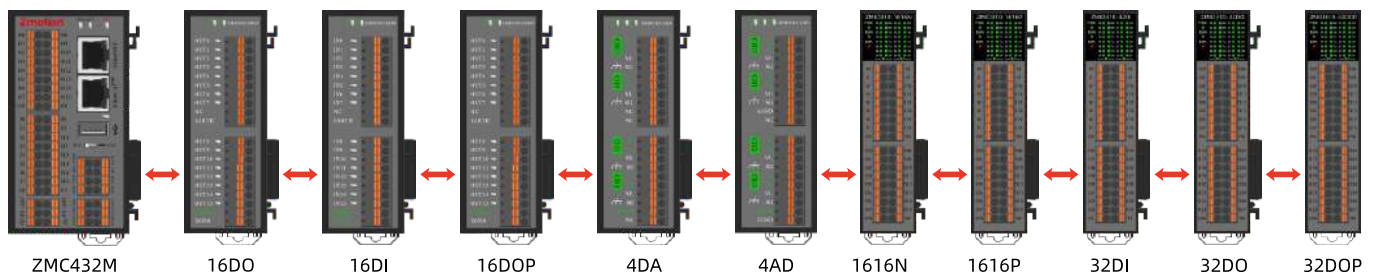

### Steps:

- Open the gap clips of all modules.
- insert sub-expansion's master (front) interface to ZMC432 slave interface.
- Close the gap clips of all modules.

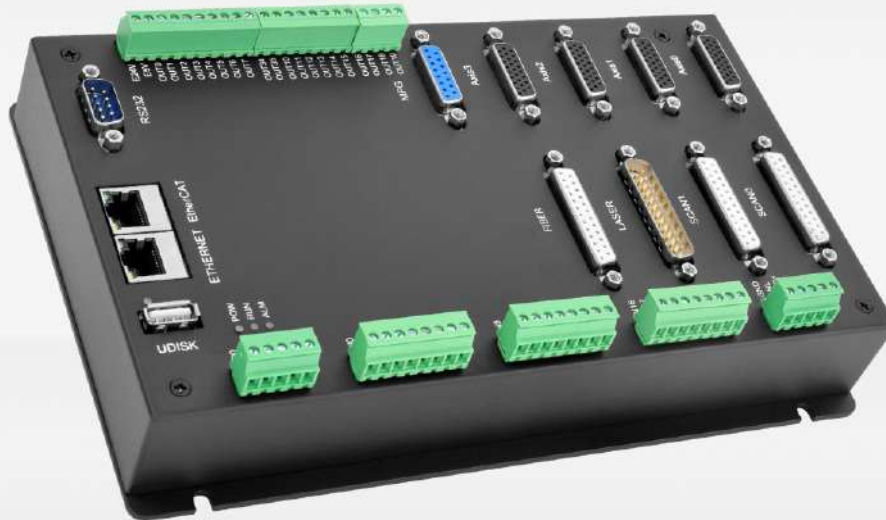

ZMC408SCAN-V22

## Laser Scan Controller – ZMC408SCAN EtherCAT®

[ZMC408SCAN-V22](#) laser galvanometer motion controller integrates laser control, scan control, with bus-axis / pulse-axis control. The controller itself supports 2 groups of XY scan axes (with scan feedback), but 32 axes motion control can be reached for complex continuous trajectory control. Also support hybrid interpolation among axes of scan, bus, pulse.



Laser scan motion controller supports XY2-100 scan protocol, and it can adapt to different functions' lasers, Fiber, UV, Carbon Dioxide.

Applications: metal / non-metal large-format splicing & marking & cutting, ordinary scan marking & welding & cutting, linkage marking & cutting of motion axis + scan axis, laser drilling & forming, etc.

### Functional Features



- Axis: up to 32 axes motion control
- IO: up to 32 INs & 28 OUTs
- Communication: RS232, RS485, U Disk, Ethernet, EtherCAT
- Analog: 2 ADs & 2 DAs, max 256 ADs & 128DAs, 1 specialized AD & 1 specialized DA
- Pulse Mode: directional + pulse / double pulse
- Scan: scan-axis interface, XY2-100 protocol
- Functions:
  - 01. specialized MPG handwheel interface.
  - 02. specialized DB25 laser control interface
  - 03. more IOs by ZCAN / EtherCAT, max 4096 isolated INs & OUTs.
  - 04. support electronic cam & gear, position latch, synchronous follow, virtual axis, comparison output, etc.
  - 05. support linear, circular interpolation, continuous trajectory, robot.
  - 06. support 8 high-speed PWM outputs.
  - 07. support multi-file & multi-task, and synchronization of controller & PC programs
- Performance:
  - 01. the max pulse output frequency can reach 10MHz.
  - 02. support hybrid interpolation among scan, pulse, and bus axes.
  - 03. the fastest EtherCAT refresh cycle within 16 axes is 100µs.

Models

Model	Image	Axis	Encoder	Scan Axes	Pulse Frequency	Laser	Hand-wheel	Inner IN & OUT	Inner AD	Inner DA	Axis Motion Buffer	Space	Task	Power Down Store	232	485	Net	ECAT	Size (mm)
ZMC408SCAN		8	4	4	10M	1	1	24+8/20+8	2	2	4096	128M	12	8000	1	1	1	1	239*149
ZMC408SCAN-V22		8	4	4	10M	2	1	24+8/20+8	2	2	4096	128M	12	8000	1	1	1	1	239*149


ZMC408SCAN-V22 VS ZMC408SCAN: ZMC408SCAN EXIO is replaced by FIBER -- ZMC408SCAN-V22.

Interfaces

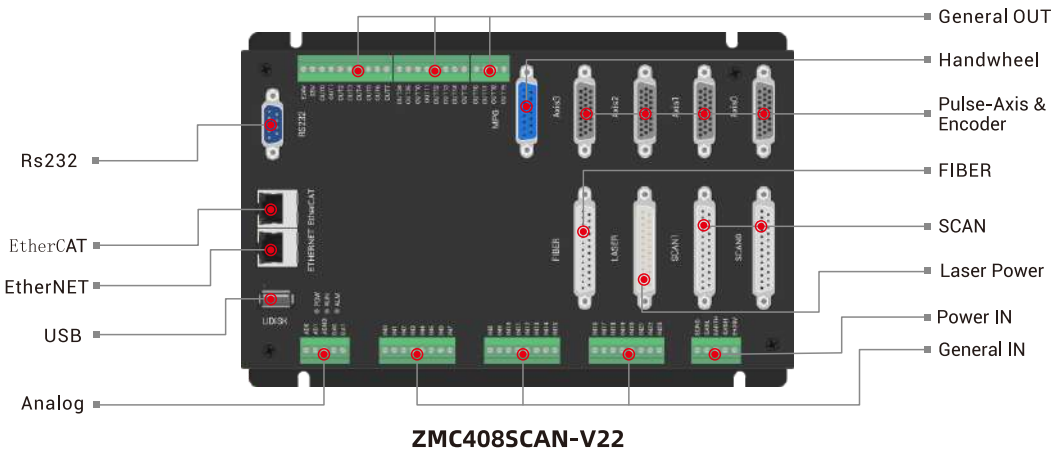

PIN No.	Name	Description
1、4、14	LAGND	Laser Analog Signal Reference Ground
2、3、13	NC	Reserved
5	Guide Control OUT32	PIN for Red Light Control OUT (24V)
6	ACON OUT33	PIN for Reserved OUT (24V)
7	LaserRequest OUT28	Laser Request OUT (24V)
8	Program start OUT29	Program Start OUT (24V)
9	ERST OUT30	Laser Reset OUT (24V)
10	LASER ON OUT31	Laser Enable OUT (24V)
11	PWM OUT9	Reserved for PWM, 24V Electric Level
12	Modulation-	Modulation Signal -
15	LASER_AD/NC AIN(2)	Reserved for Analog IN, 0-10V, 16-Bit Resolution (for special mode)
16	LASER_DA/NC AOUT(2)	
17	Error IN44	Laser Alarm IN (24V)
18	Emission EN IN45	Laser Emission IN (24V)
19	Pow Active IN49	Laser Main Power has ON (24V)
20	Power ON IN48	Laser System Powered On IN (24V)
21	Laser standby IN47	Laser in Standby IN (24V)
22	Ready IN46	Laser in Ready IN (24V)
23、25	EGND	Reference Ground of Each Digital IN & OUT
24	Modulation+ OUT8	Modulation Signal +, 24V Electric Level


▲ Laser Power Control Port (DB25 Male Head) ZMC408SCAN



PIN No.	Name	Description
1	Clk-	Clock Signal-
14	Clk+	Clock Signal+
2	SYNC-	Synchronization Signal-
15	SYNC+	Synchronization Signal+
3	X-	Scan X Signal-
16	X+	Scan X Signal+
4	Y-	Scan Y Signal-
17	Y+	Scan Y Signal+
5	Z-	Scan Z Signal-
18	Z+	Scan Z Signal+
6	Y RETURN-	Scan Y Feedback Signal-
19	Y RETURN+	Scan Y Feedback Signal+
7	Z RETURN-	Scan Z Feedback Signal-
20	Z RETURN+	Scan Z Feedback Signal+
8	X RETURN-	Scan X Feedback Signal-
21	X RETURN+	Scan X Feedback Signal+
9	NC	-
22	NC	-
10	NC	-
23	GND	Signal Ground, Public End
11	GND	Signal Ground, Public End
24	GND	Signal Ground, Public End
12	NC	-
25	NC	-
13	NC	-

▲ SCAN (DB25 Female Head) ZMC408SCAN

Note: refer to "User Manual" for more models and details.

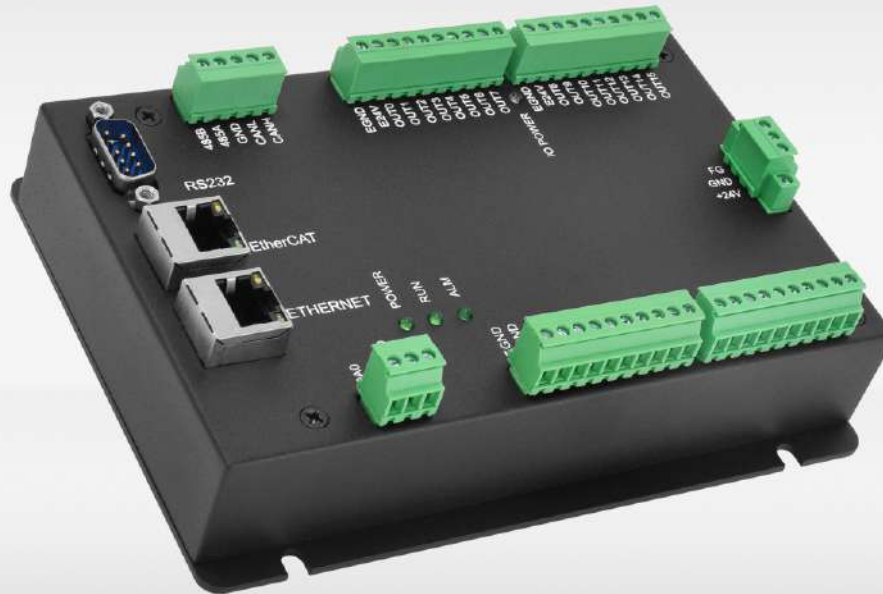

XPLC006E-V2

# XPLC Series Controller











[XPLC](#) economical multi-axis standalone motion controller is compatible with EtherCAT and pulse, and supports PLC (ladder diagram) programming. Itself supports up to 32 axes motion control to realize point to point, linear motion, electronic cam, etc.

**Applications:** electronic semiconductor equipment (detection, assembly, locking, soldering), dispensing equipment, non-standard equipment, printing & packaging, textile & garment, medical equipment, assembly line, robot, etc.


## Functional Features

- Axis: up to 32-axis (include virtual-axis, EtherCAT, pulse axis)
- IO: up to 32 INs & 32 OUTs
- Communication: RS232, RS485, EtherNET.
- Analog: 2 DAs & 2 ADs, max 256 ADs & 128 DAs by ZCAN expansion
- Pulse Mode: directional + pulse / double pulse
- Functions:
  01. support encoder input, which can be configured as handwheel mode.
  02. support IO expansion by ZCAN, max 4096 INs & 4096 OUTs synchronously.
  03. axis position limit, origin signal can be configured as any IN.
  04. max output current is 300mA, which can directly drive some solenoid valve.
  05. support electronic cam, electronic gear, position latch, synchronous follow, virtual axis, etc.
  06. support multi-file & multi-task, programs of PC & controller can work synchronously.
  07. a variety of encryption methods to protect user's program.
  08. support power failure detection & power failure storage.
- Performance:
  01. EtherCAT fastest refresh cycle is 1ms.
  02. max pulse output frequency can reach 500kHz.
  03. support up to 32 axes for point motion, linear motion, and electronic cam.

## Models

Model	Image	Axis	En-coder	Pulse Frequency	Inner IN and OUT	Inner AD	Inner DA	Axis Motion Buffer	Space	Task	Power Down Store	232	485	Net	ECAT	USB	Size (mm)	Functional Description
XPLC004E-V2		4	-	-	16/16	-	2	32	6144k	6	1024	1	1	1	1	-	160*114.5	point, cam, line
XPLC006E-V2		6	-	-	16/16	-	2	32	6144k	6	1024	1	1	1	1	-	160*114.5	point, cam, line
XPLC008E-V2		8	-	-	16/16	-	2	32	6144k	6	1024	1	1	1	1	-	160*114.5	point, cam, line
XPLC016E-V2		16	-	-	16/16	-	2	32	6144k	6	1024	1	1	1	1	-	160*114.5	point, cam, line
XPLC664E2-V2		6	2	500k (single-ended)	32/32	2	2	128	2M	10	1024	1	1	1	1	1	219*135	point, cam, line
XPLC864E2-V2		8	2	500k (single-ended)	32/32	2	2	128	2M	10	1024	1	1	1	1	1	219*135	point, cam, line
XPLC1264E2-V2		12	2	500k (single-ended)	32/32	2	2	128	2M	10	1024	1	1	1	1	1	219*135	point, cam, line
XPLC1664E2-V2		16	2	500k (single-ended)	32/32	2	2	128	2M	10	1024	1	1	1	1	1	219*135	point, cam, line

## Interfaces

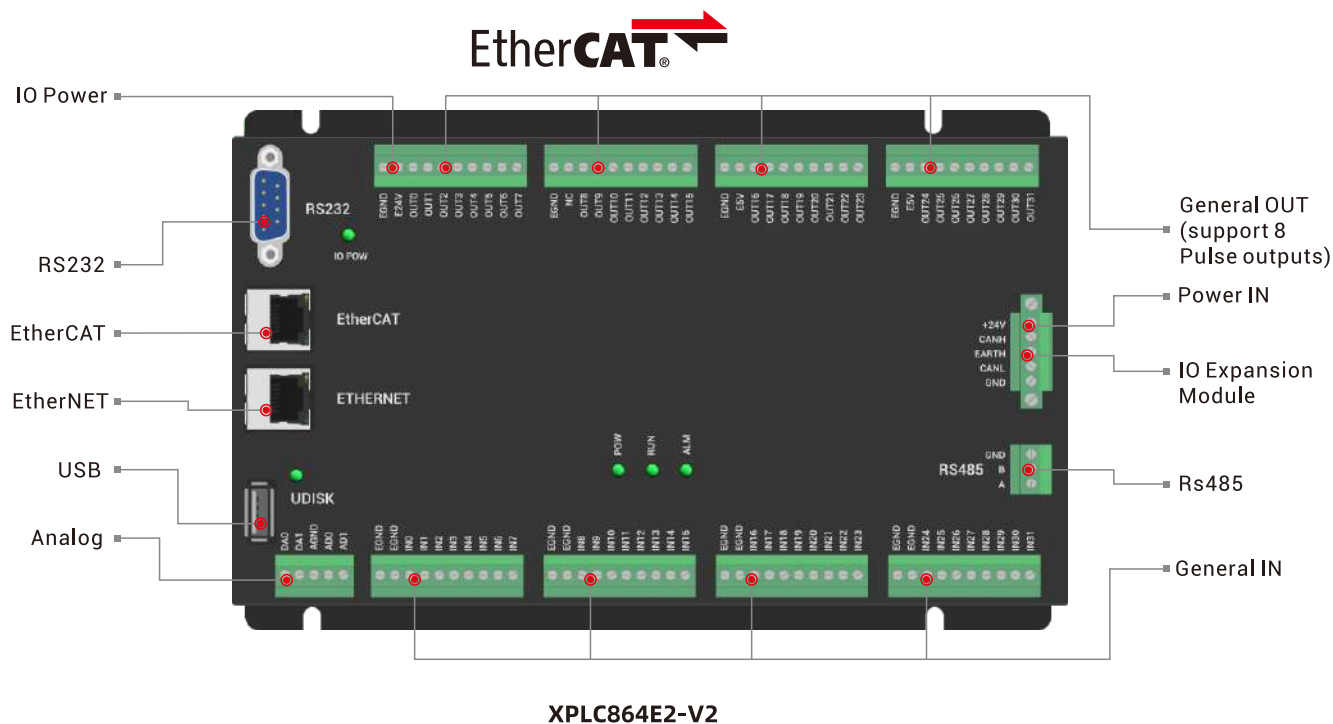

Note: refer to "User Manual" for more models and details.



XPLC312E

# XPLC300

EtherCAT®





[XPLC300](#) multi-axis standalone motion controller is one EtherCAT vertical controller that supports PLC (ladder diagram) programming. Itself supports up to 12 EtherCAT axes, 16 axes motion control can be extended to realize point motion, linear motion, electronic cam, etc.

**Applications:** electronic semiconductor equipment (detection, assembly, locking, soldering), dispensing equipment, non-standard equipment, printing & packaging, textile & garment, medical equipment, assembly line, robot, etc.


## Functional Features

- Axis: up to 16-axis (include virtual-axis, EtherCAT axis)
- IO: 1 IN, no OUT
- Communication: RS232, RS485, EtherNET, EtherCAT.
- Functions:
  - 01. support IO expansion by EtherCAT.
  - 02. local can expand 16 IO submodules / 8 AIO submodules.
  - 03. support reading & writing USB files and updating program for remote maintain.
  - 04. support PLC, Basic, HMI programming.
  - 05. support multi-file & multi-task programming, programs of PC and controller can work at the same time.
  - 06. support point motion, synchronous motion, motion superposition, electronic cam, linear interpolation, etc.
  - 07. support second development of all kinds of PC languages.
  - 08. a variety of encryption methods to protect user's program.
  - 09. support power failure detection & power failure storage.
- Performance:
  - 01. EtherCAT fastest refresh cycle is 1ms.
  - 02. support up to 16 axes for point motion, linear motion, electronic cam.

Models

Model	Image	Axis	Inner IN & OUT	IO Sub-Modules (local extend)	AIO Sub-Modules (local extend)	Axis Motion Buffer	Space	Task	Power Off Store	232	485	Net	ECAT	USB	Size (mm)	Functional Description
XPLC304E		4	1/0	16	8	128	6144kB	12	1024	1	1	1	1	1	108*32*95	point, electronic cam, linear interpolation
XPLC306E		6	1/0	16	8	128	6144kB	12	1024	1	1	1	1	1	108*32*95	point, electronic cam, linear interpolation
XPLC308E		8	1/0	16	8	128	6144kB	12	1024	1	1	1	1	1	108*32*95	point, electronic cam, linear interpolation
XPLC312E		12	1/0	16	8	128	6144kB	12	1024	1	1	1	1	1	108*32*95	point, electronic cam, linear interpolation

Interfaces

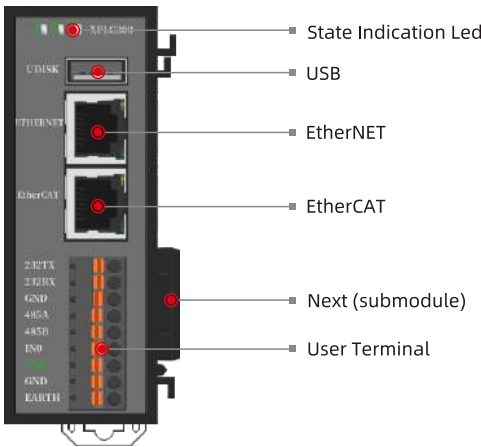

No.	Name	Functional Description			
1	State Indication Led	POW	Power Led	Green	Power ON -- ON
		RUN	Run Led	Green	Run Well -- ON
		ALM	Error Led	Red	Run Error -- ON
2	USB	standard USB port for connecting to U disk			
3	EtherNET	standard Ethernet to link with PC / other net devices			
4	EtherCAT	Standard Ethernet to link with EtherCAT slave			
5	User Terminal	9 pin port, power, RS232, RS485, IN0			
6	For Next after Local Expansion	connect to next sub-module, not support hot plugging			

Note: refer to "User Manual" for more models and details.

How to Install Local Expansion

It can connect to ZMIO310 series expansion sub-module through "interface for next connecting".



How to Install:


- ▶ open all modules' clearance snaps.
- ▶ connect front level expansion interface of sub-module to behind level expansion interface of XPLC300 controller (/ sub-module).
- ▶ close all modules' clearance snap.

# Vision Motion Controller



VPLC Controllers

## VPLC516E / VPLC532M System Structure

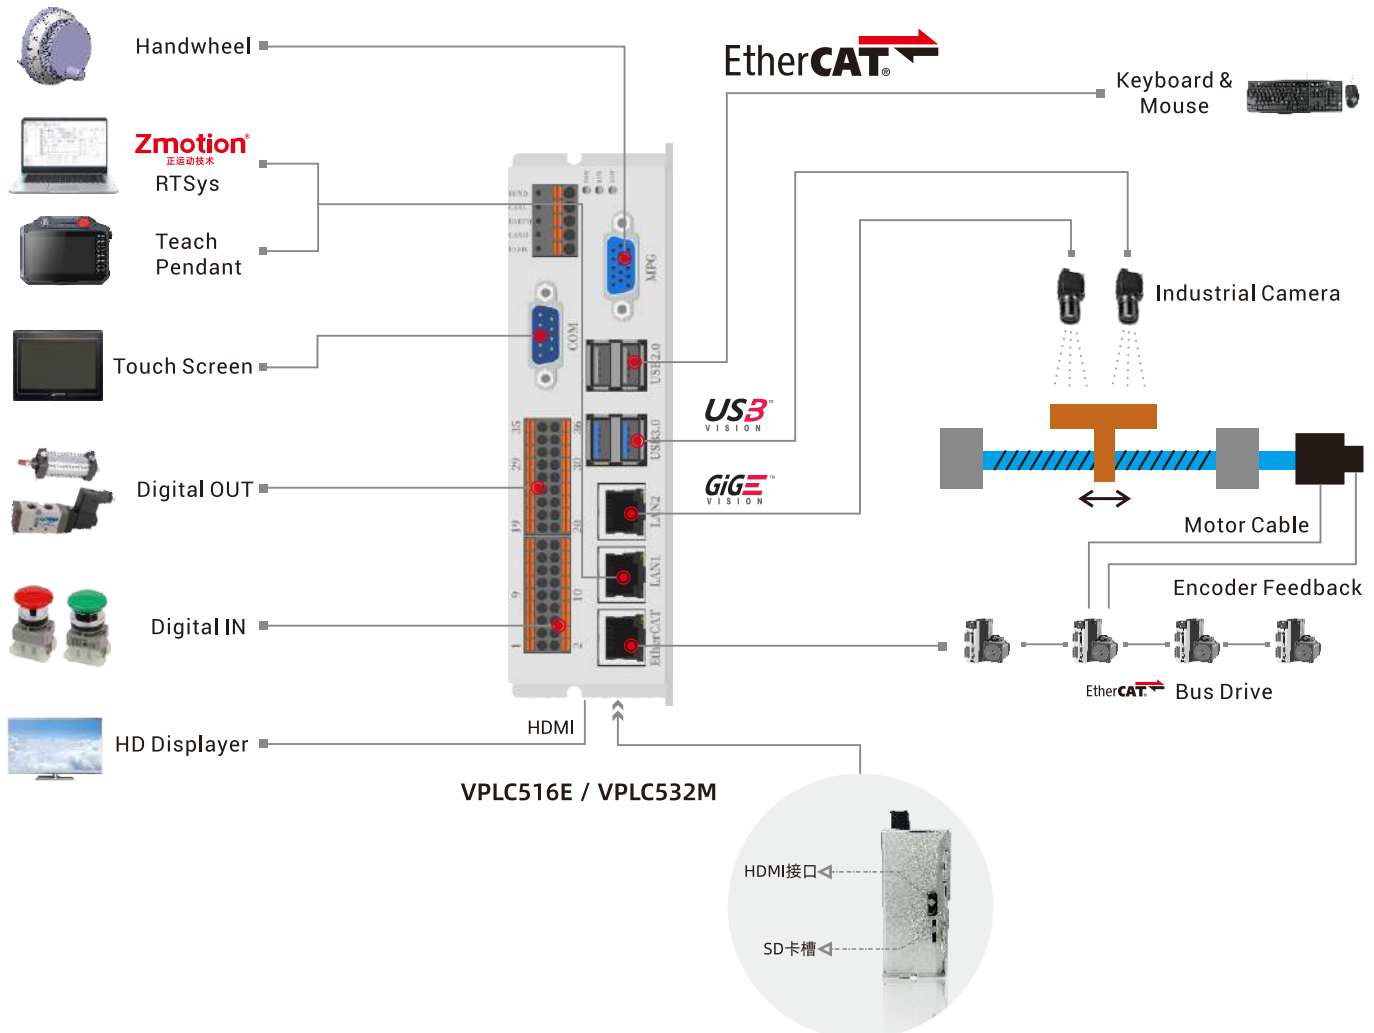

## Support QT Programming

### Machine Vision Functions

Positioning | Measurement | Detection | Identification

### MotionControl Functions

Robot Algorithm | Vision Fly-Shooting PWM & Speed Synchronized


Position Precision Output PSO (1D/2D/3D)

Electronic Cam | Multi-Axis Interpolation | Small-Segment Look-Ahead

- one-stop-shop development by RTSys
- develop PLC, Basic, HMI, Motion, Vision, etc.
- replace PC+Windows+Vision algorithm+control card
- support mainstream cameras & EtherCAT servos
- easy to develop vision by Basic / PLC
- direct data interaction, faster one level than PCI/PCIe
- expand Basic commands by C, real-time & flexible

## RTSys Features

- Integrate Basic, PLC, HMI, with machine vision.

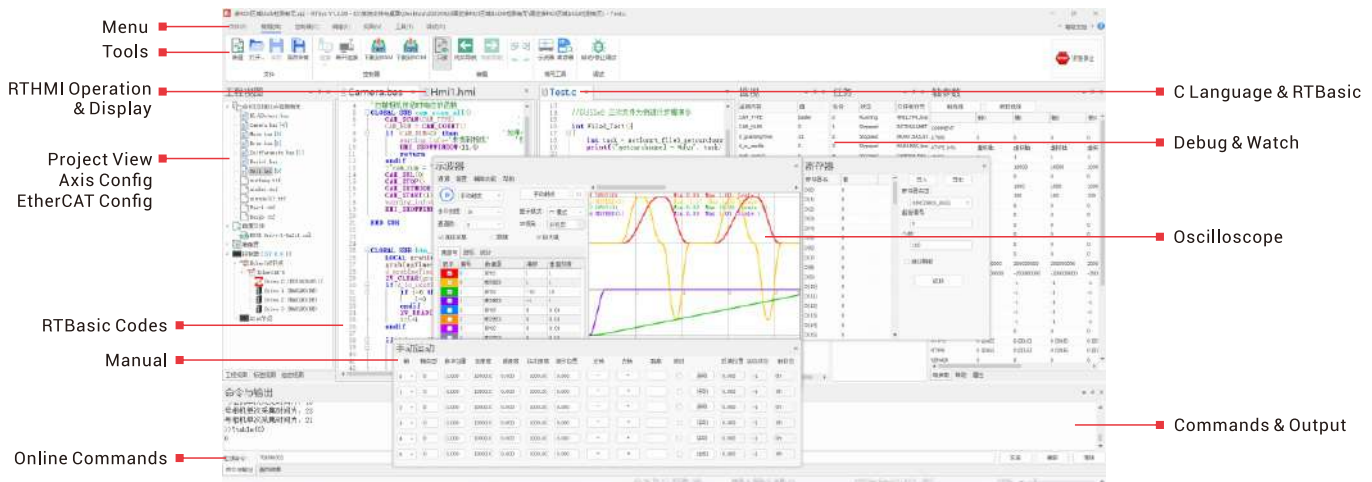

RTSys is a one-stop-shop development software that integrates machine vision and motion control functions. It supports secondary development of RTBasic, RTPLC (ladder diagram), RTHMI, and machine vision RTVision. What's more, it supports rich functions for complex motion control development, like, hybrid programming, real-time simulation, online tracking & diagnosis & debugging, etc., and for vision control, it can rapidly realize vision positioning, measurement, identification, detection.

## Easy & Quick Start



- Self R&D Industrial IDE Software.
- It also can simulate and debug local graphics when there is no controller.

## Vision Functional Features



Vision Positioning



Blob Analysis



Vision Measurement




Detection & Recognition

# Vision Function Description

## Image Preprocessing


Highlight the feature to be detected, eliminate image noise & interference to extract, identify, detect the feature accurately. (binarization, histogram processing, geometric transformation, filtering, image enhancement, etc.)

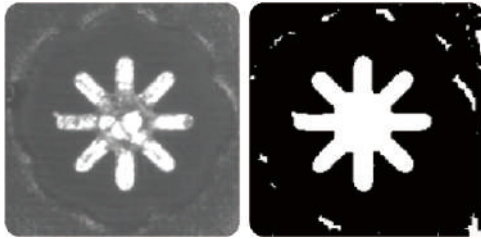

Applications: scratch detection, contour extraction, blob analysis, etc.

## Camera Calibration


The conversion between the image coordinates and the world coordinate system can be realized by coordinate calibration.

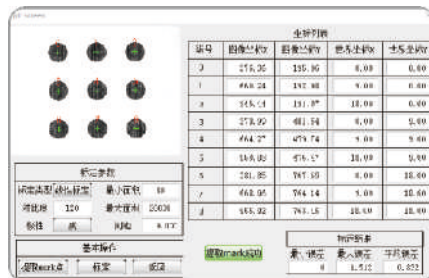

Applications: visual positioning's offset correction, length / area measurement, etc.

## Vision Measurement

Measure the image's target or area feature, which mainly are length, circle, angle, arc, size measurement, etc.)

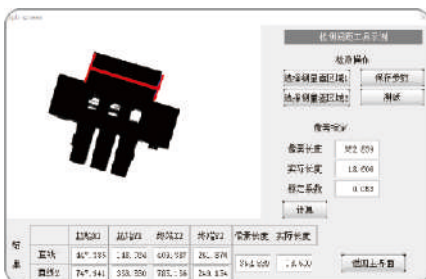

Applications: workpiece size measurement, assembly detection, etc.

## Recognition & Detection

Recognize 1D bar code, 2D codes, characters in a specific area.



Applications: assembly line material testing, food package testing, product information acquisition and entry, etc.

## Vision Positioning

By learning a specific template or fixed feature, then find which feature meets the conditions in the detection area, and return its coordinate (in the image).



Applications: assembly line positioning, robotic arm grasping, etc.

## Blob Analysis

Binarize and segment the image in ROI area, then detect it in the connection area to obtain Blob spots.



Applications: product counting, product defect testing, etc.

## Defect Detection

Defect defects on the surface of the workpiece, like, spots, pits, scratches, color error, etc.



Applications: phone glass cover scratch detection, metal surface scratch detection, etc.

## Vision Fly-Shooting

(motion control) "precision output" & "PSO" + machine vision functions for vision fly-shooting -- "high-speed" & "high-precision" of intelligent equipment.



Applications: robotic visual sorting, visual loading & unloading, etc.



**VPLC516E**

## VPLC516E / VPLC532M

**EtherCAT®**





[VPLC516E](#) is one EtherCAT vision motion controller. Itself supports max 16 axes, but can be expanded to 32 axes to achieve complex motion control and machine vision applications (motion: electronic cam, linear, circular, continuous processing, robotic arm, etc., vision: positioning, measurement, detection, identification).

Applications: 3C electronics, lithium batteries, printing & packaging, food & medicine, robot, assisting robots, semiconductors, laser, etc.


### Functional Features

- ▶ Axis: up to 32 EtherCAT axes (include virtual-axis)
- ▶ IO: 16 INs & 16 OUTs
- ▶ Communication: RS232, RS485, USB, EtherNET, EtherCAT, CAN
- ▶ Analog: max 128 ADs & 64 DAs by ZCAN expansion
- ▶ Pulse Mode: directional + pulse
- ▶ Functions:
  01. support vision fly-shooting.
  02. 1 "handwheel" interface (12 Ins).
  03. 2 camera interfaces (USB3.0 & GiGE).
  04. max 4096 INs & 4096 OUTs can be extended by EtherCAT.
  05. 2 precision outputs, for position synchronized output (PSO).
  06. support 30+ robot algorithms (Delta, SCARA, 6-joint, dual rotate, etc.).
  07. support electronic cam, line, arc, continuous processing, etc.
  08. a variety of encryption methods to protect user's program.
  09. support power failure detection & power failure storage.
  10. support RTBasic multi-file & multi-task programming.
- ▶ Performance:
  01. EtherCAT fastest refresh cycle (within 16-axis) is 100μs.
  02. max pulse output frequency can reach 500kHz.
  03. support up to 16 axes for interpolations of line, arc, helical, ellipse.
  04. support multi-machine independent continuous interpolation.
  05. direct data interaction, faster one level than PCI/PCIe
  06. Linux system, replace "IPC + machine vision + motion control".

## Models

Model	Image	Axis	En-coder	Pulse Fre-quency	Inner AD	Inner DA	PWM	Inner IN and OUT	Axis Motion Buffer	Space	Task	Power off Store	232	485	Net	ECAT	HDMI	USB 2.0	USB 3.0	SD Card Slot	Size (mm)	Functional Description
VPLC516E-4		4	1+1	500k single ended	-	-	2	16/16	4096	64M	22	8000	1	1	2	1	1	2	2	1	162*47*119	point, line, arc, cam, continuous motion, robotic arm command
VPLC516E-6		6	1+1	500k single ended	-	-	2	16/16	4096	64M	22	8000	1	1	2	1	1	2	2	1	162*47*119	point, line, arc, cam, continuous motion, robotic arm command
VPLC516E-8		8	1+1	500k single ended	-	-	2	16/16	4096	64M	22	8000	1	1	2	1	1	2	2	1	162*47*119	point, line, arc, cam, continuous motion, robotic arm command
VPLC516E		16	1+1	500k single ended	-	-	2	16/16	4096	64M	22	8000	1	1	2	1	1	2	2	1	162*47*119	point, line, arc, cam, continuous motion, robotic arm command

## Interfaces

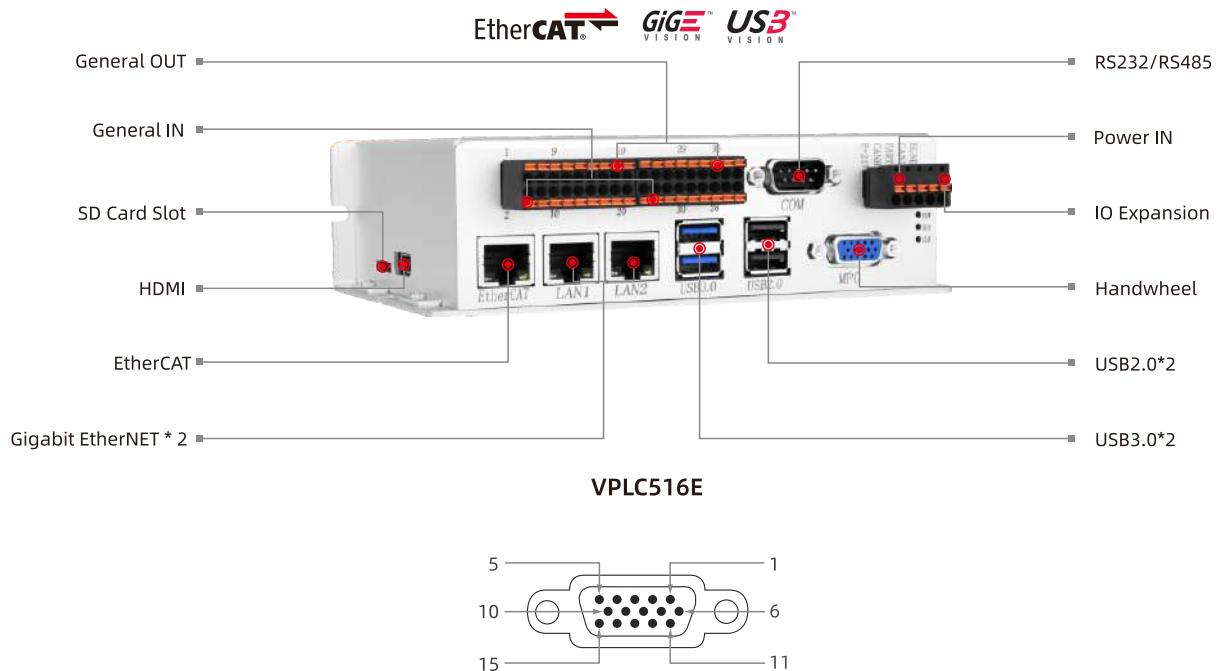

PIN No.	Signal	Description	PIN No.	Signal	Description
1	H-5V	Supply Power for Handwheel	9	Hs3	Select Axis 3
2	HA-	Encoder A Signal	10	HS4	Select Axis 4
3	HB-	Encoder B Signal	11	EGND	External Power Ground
4	HEMGN	Emergency Stop	12	HS5	Select Axis 5
5	NC	-	13	HS2	Select Axis 2
6	HX1	Select X1 Ratio	14	HS1	Select Axis 1
7	HX10	Select X10 Ratio	15	Hs0	Select Axis 0
8	HX100	Select X100 Ratio	-	-	-

▲ Handwheel Interface (DB15 Female Head) VPLC516E

Note: refer to "User Manual" for more models and details.



# VPLC532E






[VPLC532E](#) is one EtherCAT vision motion controller. Itself supports max 32 axes to achieve complex motion control and machine vision applications (motion: electronic cam, linear, circular, continuous processing, robotic arm, etc., vision: positioning, measurement, detection, identification).

Applications: 3C electronics, lithium batteries, printing & packaging, food & medicine, robot, assisting robots, semiconductors, laser, etc.



## Functional Features

- Axis: up to 32 EtherCAT axes
- IO: 24+6 INs & 12+6 OUTs
- Communication: RS232, RS485, USB, EtherNET, EtherCAT, CAN
- Analog: 2 DAs, max 520 ADs & 520 DAs by ZCAN expansion
- Pulse Mode: directional + pulse / dual pulse
- Functions:
  - 01. support vision fly-shooting.
  - 02. 6 pulse-axis interfaces on board.
  - 03. 2 camera interfaces (USB3.0 & GiGE).
  - 04. max 4096 INs & 4096 OUTs can be extended by EtherCAT.
  - 05. 2 precision outputs, for position synchronized output (PSO).
  - 06. support 30+ robot algorithms (Delta, SCARA, 6-joint, dual rotate, etc.).
  - 07. support electronic cam, line, arc, continuous processing, etc.
  - 08. a variety of encryption methods to protect user's program.
  - 09. support power failure detection & power failure storage.
  - 10. support RTBasic multi-file & multi-task programming.
- Performance:
  - 01. EtherCAT fastest refresh cycle (within 16-axis) is 100μs.
  - 02. max pulse output frequency can reach 10MHz.
  - 03. support up to 16 axes for interpolations of line, arc, helical, ellipse.
  - 04. support multi-machine independent continuous interpolation.
  - 05. direct data interaction, faster one level than PCI/PCIE
  - 06. Linux system, replace "IPC + machine vision + motion control".

## Models

Model	Image	Axis	En-coder	Pulse Fre-quency	Inner AD	Inner DA	PWM	Inner IN and OUT	Axis Motion Buffer	Space	Task	Power off Store	232	485	Net	ECAT	HDMI	USB 2.0	USB 3.0	SD Card Slot	Size (mm)	Functional Description
VPLC532E-6-8		6	6	10M	-	2	4	24+6/12+6	4096	64M	26	8000	1	1	2	1	1	2	2	1	184*140	point, line, arc, cam, continuous motion, robotic arm command
VPLC532E-16		16	6	10M	-	2	4	24+6/12+6	4096	64M	26	8000	1	1	2	1	1	2	2	1	184*140	point, line, arc, cam, continuous motion, robotic arm command
VPLC532E		32	6	10M	-	2	4	24+12/12+12	4096	64M	26	8000	1	1	2	1	1	2	2	1	184*140	point, line, arc, cam, continuous motion, robotic arm command

## Interfaces

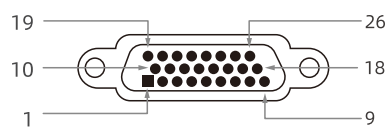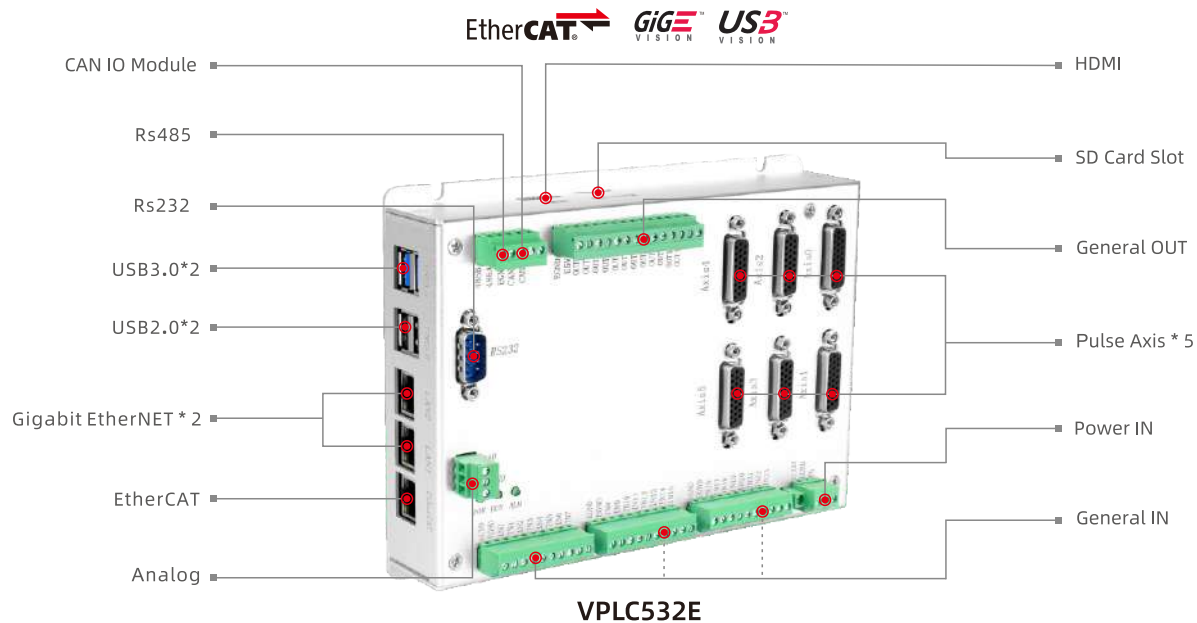

PIN No.	Signal	Description	PIN No.	Signal	Description
1	EGND	External Power Ground	14	OVCC	E+24V Output (better only for Servo IO)
2	IN24-29/ALM	General IN, recommended to do Drive Alarm	15	OUT18-23/CLR	Digital OUT, better do Drive Alarm Clear
3	OUT12-17/ENABLE	General OUT, recommended to do Drive Enable	16	IN30-35/INP	Digital IN, better do on-position
4	EA-	Encoder Input	17	EA+	Encoder Input
5	EB-	Encoder Input	18	EB+	Encoder Input
6	EZ-	Encoder Input	19	EZ+	Encoder Input
7	+5V	Power Output	20	GND	Internal Power Ground
8	Reserved	Reserved	21	GND	Internal Power Ground
9	DIR+	Servo / Stepper Directional Output	22	DIR-	Servo / Stepper Directional Output
10	GND	Internal Power Ground	23	PUL+	Servo / Stepper Pulse Output
11	PUL-	Servo / Stepper Pulse Output	24	GND	Internal Power Ground
12	Reserved	Reserved	25	Reserved	Reserved
13	GND	Internal Power Ground	26	Reserved	Reserved

▲ Pulse & Encoder (DB26 Female Head) VPLC532E

Note: refer to "User Manual" for more models and details.



## VPLC7XX Controller



[VPLC7XX](#) is one IPC vision motion controller based on x86, and it matches with Zmotion researched (national produced) Windows real-time motion soft kernel "MotionRT", then VPLC7XX becomes real-time motion controller or real-time PLC. VPLC7XX supports EtherCAT. Motion control can be 4-240 axes, for linkage, up to 16 axes. And the minimal period is 500us. Moreover, it is with powerful functions (√high-speed & high-precision). Specifically, some required functions in automatic industry, high-speed DI/DO, pulse control, handwheel control, etc.

**Applications:** high-speed & high-precision -- semiconductor, 3C electronics, new energy, automobile production line, laser, etc.

### VPLC711 Hardware Parameters

01. x86 high-performance CPU -- 64 axes synchronous motion (1ms) by EtherCAT
02. interfaces on board -- RS232, RS485, EtherNet\*5, EtherCAT, USB3.0\*4
03. 20 DI -- 4 (high-speed color patch latch), 2 (high-speed single-ended encoder)
04. 20 DO -- 4 (high-speed single-ended pulse), 4 groups of high-speed PWM
05. support DVI-D, HDMI display, and multiple net-ports' IP can be different.

#### ► Motion Control Functions

point to point, electronic cam, linear interpolation, circular interpolation, continuous trajectory processing, robot.

high-speed PSO OUTs on the board, support 1D / 2D / 3D high-speed position synchronized output.

Applications can be vision fly-shooting, high-speed dispensing, laser.

#### ► Machine Vision Functions



Positioning



Blob Analysis



Measurement





Detection & Recognition


### VPLC712Hardware Parameters

01. x86 high-performance CPU -- 240 axes synchronous motion by EtherCAT
02. interfaces on board -- RS232, RS485, EtherNet, EtherCAT, USB2.0. USB4.0
03. 20 DI -- 4 (high-speed color patch latch), 2 (high-speed single-ended encoder)
04. 20 DO -- 4 (high-speed single-ended pulse), 4 groups of high-speed PWM
05. support HDMI display, and dual-Ethernet IP can be different.

## Interfaces

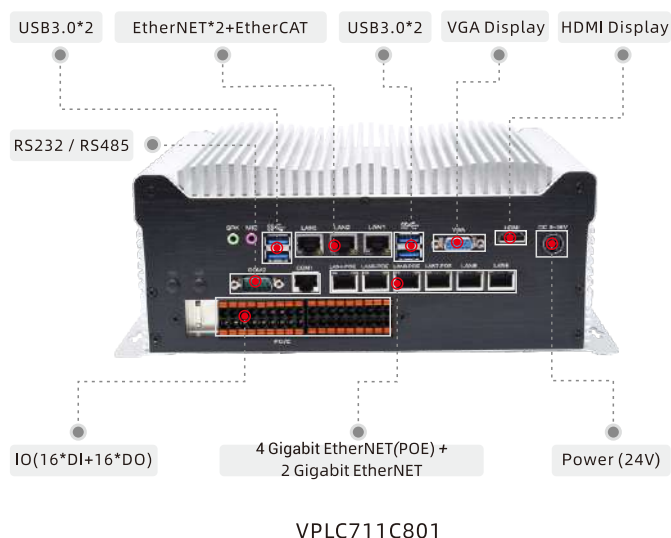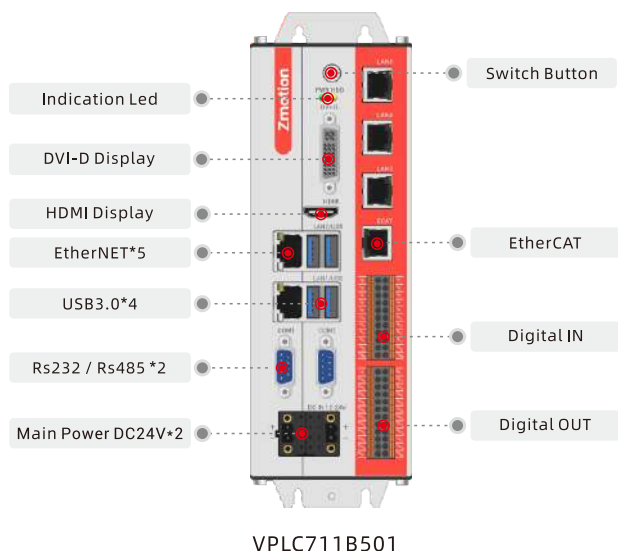

## Typical Application

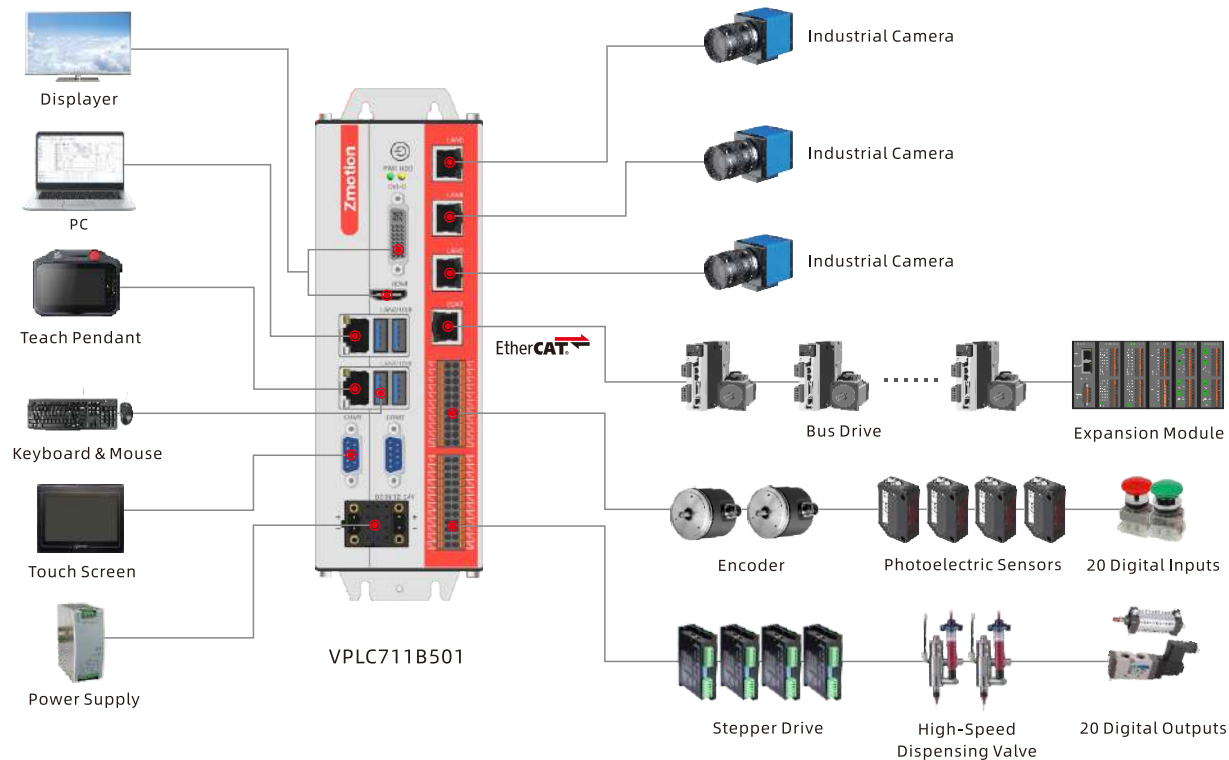

## Order Information

### Hardware

VPLC711A201	① Product Series
VPLC711B201	② CPU Model
VPLC711B501	③ EtherNET Number
VPLC712A201	④ Hardware Version No.
VPLC712A401	
① ② ③ ④	

For Example:

VPLC712A401-AX64-M08-HW-ZV-R6-YYY

### Software

AX64	-	M08	-	HW	-	ZV	-	R	-	F	-	YYYY
①		②		③		④		⑤		⑥		⑦


- ① 64 Axes (6-128)
- ② Motion Control
- ③ PSO
- ④ Vision
- ⑤ R1 Ordinary Robot  
R6 6-Joint & Special Robots
- ⑥ F = Fast, 125us
- ⑦ YYYY – User Custom Functions

# Network Motion Control Card




ECI2828-V2

## Pulse Network Motion Control Card System Structure

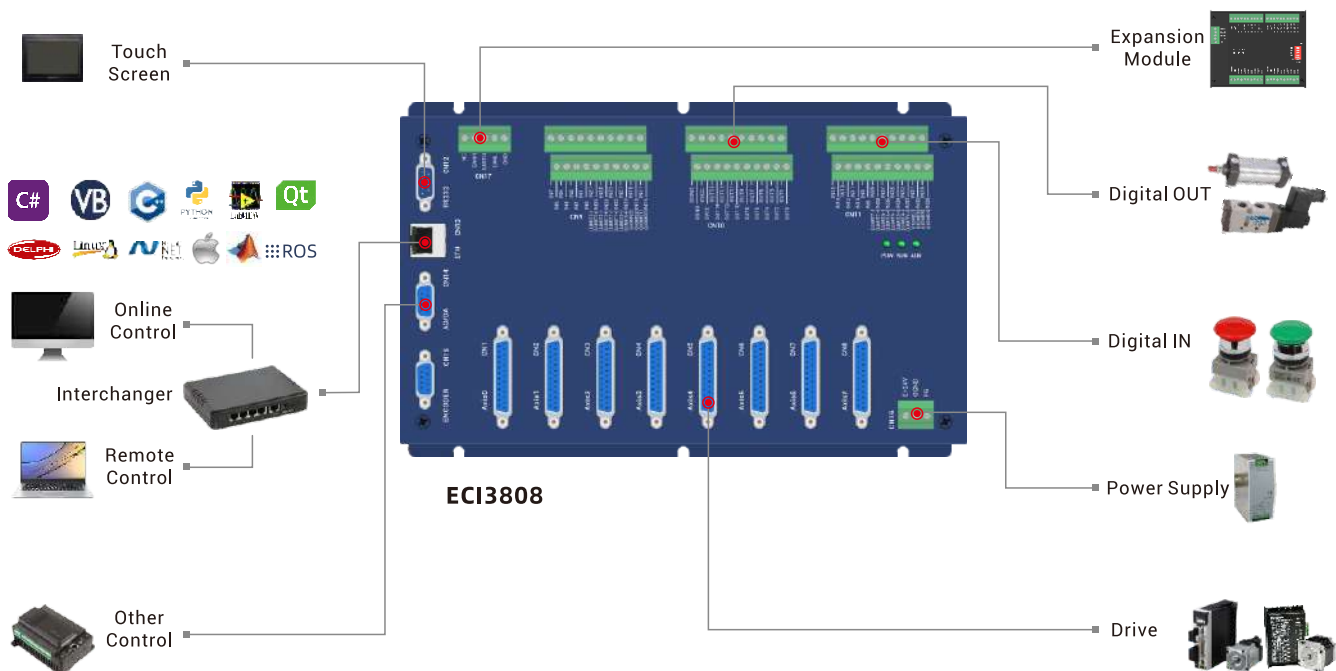


## EtherCAT Network Motion Control Card System Structure

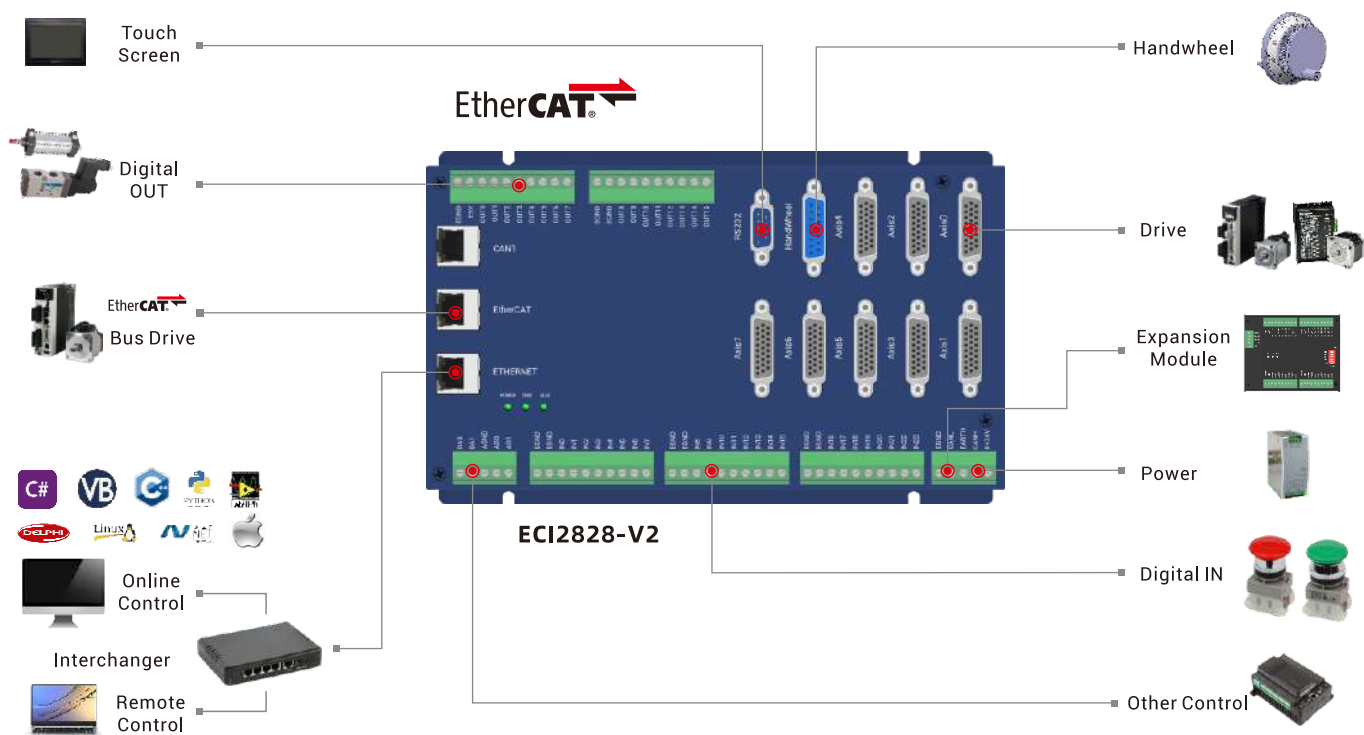



ECI0032

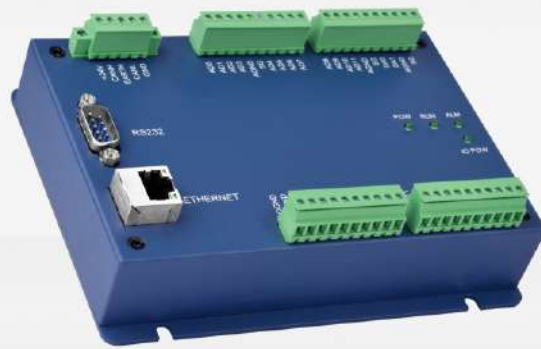

EtherNET High-Precision Data Acquisition Card

ECI0016PA







## ECI Network IO Card

ECI IO Card: Network IO control card, which supports IO and AIO expansion.



### Functional Features


- IO: 16 INs & 16 OUTs (ECI0032), 32 INs & 32 OUTs (ECI0064),
- Communication: RS232, EtherNET
- Analog: support ZCAN expansion, max 128 ADs & 64 DAs.
- Functions:
  01. support ZCAN expanding IO, 256 inputs and 256 outputs can be expanded at the same time.
  02. max output current can reach 300mA, which directly drive some solenoid valve.
  03. support multi-file programming, PC program and controller inner program can work simultaneously.
  04. a variety of encryption methods to protect your program.
  05. it can be used for ZCAN slave station expansion.

## Models

Model	Image	Axis	Encoder	Inner IN & OUT	Inner AD	Inner DA	Axis Motion Buffer	Space	Task	232	422	485	NET	USB	Size (mm)	Functional Description
ECI0016PA		0	0	8/8	12 (16bit)	2 (12bit)	-	3k	3	1	-	-	1	-	150*114	8 IN & 8 OUT (with over-current protection)
ECI0032		0	0	16/16	-	-	-	3k	2	1	-	-	1	-	150*114	16 IN & 16 OUT (with over-current protection)
ECI0032B		0	0	16/16	-	-	-	3k	2	1	-	-	1	-	150*114	16 IN & 16 OUT (with over-current protection) can run offline
ECI0064		0	0	32/32	-	-	-	3k	1	1	-	-	1	-	192*129	32 IN & 32 OUT (with over-current protection)
ECI0064B		0	0	32/32	-	-	-	3k	2	1	-	-	1	-	192*129	32 IN & 32 OUT (with over-current protection) can run offline
ECI0064C		0	0	32/32	-	-	-	3k	1	1	-	-	1	-	194*110	32 IN & 32 OUT (with over-current protection) can run offline

## Interfaces

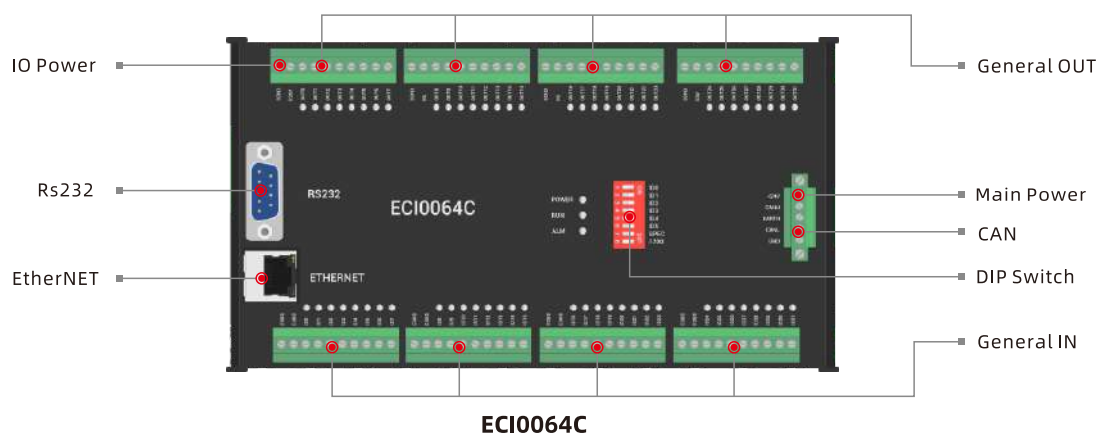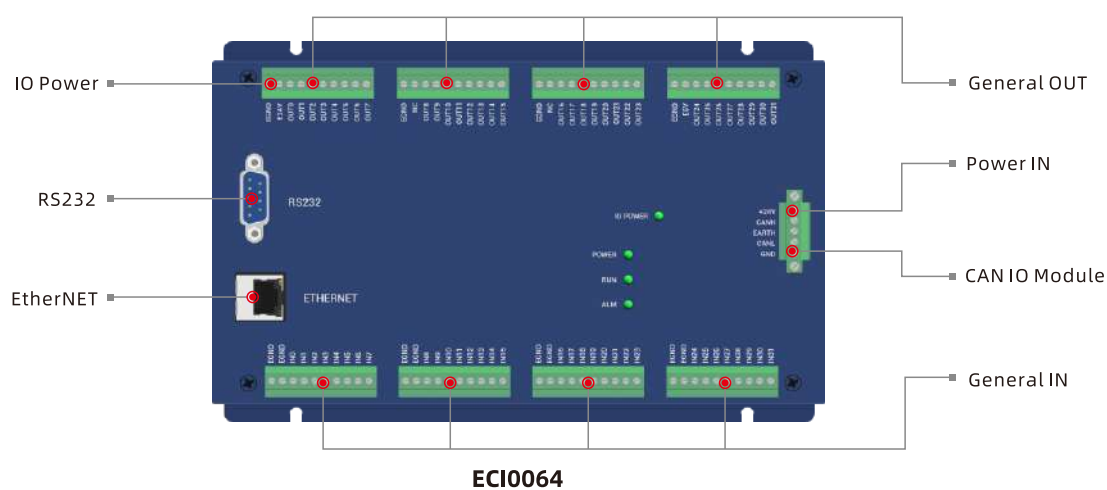

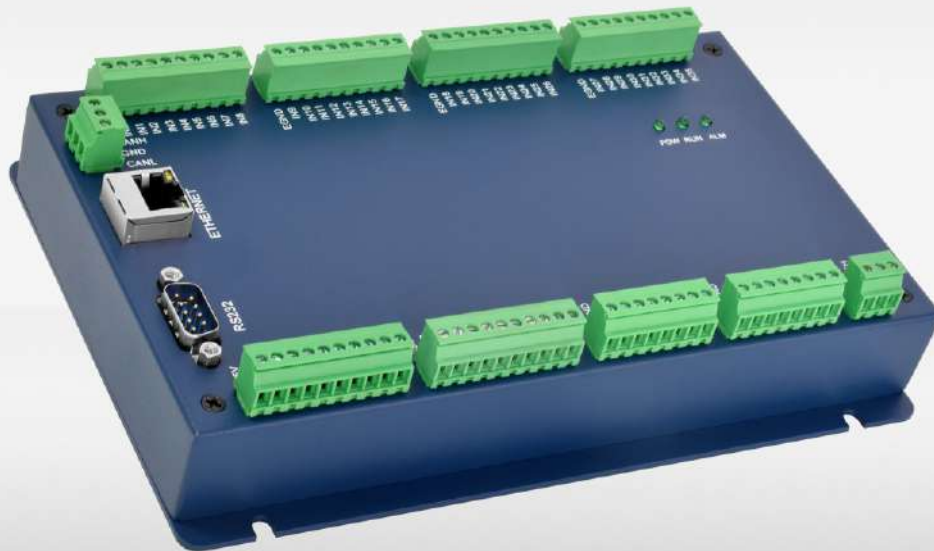

ECI1408

## ECI1000 Series Card



[ECI1000](#) economical multi-axis motion control card is one pulse network card. Itself supports max 4 axes, 6 axes motion control can be extended to realize simple control, linear, circular, helical interpolation, etc.

Applications: within 6 pulse axes -- electronic semiconductor equipment (detection, assembly, locking, soldering), dispensing equipment, assembly line, etc.


### Functional Features

- Axis: up to 6-axis (include virtual-axis)
- IO: up to 36 INs & 12 OUTs
- Communication: RS232, EtherNET
- Analog: support ZCAN expansion, max 128 ADs & 64 DAs
- Pulse Mode: directional + pulse / dual-pulse
- Functions:
  01. support encoder input, which can be configured as handwheel mode.
  02. max 256 INs & 256 OUTs can be expanded by CAN synchronously.
  03. axis position limit, origin signal can be configured as any IN.
  04. max output current is 300mA, it can directly drive some solenoid valve.
  05. support electronic cam & gear, position latch, synchronization, virtual axis
  06. support multi-file & multi-task.
  07. a variety of encryption methods to protect user's program.
- Performance:
  01. max pulse output frequency can reach 5MHz.
  02. support up to 6 axes for linear, circular, helical interpolation.
  03. support multi-machine independent continuous interpolation.


## Models

Model	Image	Axis	Encoder	Pulse Frequency	Inner IN and OUT	Inner AD	Inner DA	Axis Motion Buffer	Space	Task	232	422	485	NET	USB	Size (mm)	Functional Description
ECI1308		3	1 (24V)	5M	36/12	-	-	128	2k	1	1	-	-	1	-	205*138	point, line, arc, cam, continuous interpolation
ECI1408		4	1 (24V)	5M	36/12	-	-	128	2k	1	1	-	-	1	-	205*138	point, line, arc, cam, continuous interpolation

## Interfaces

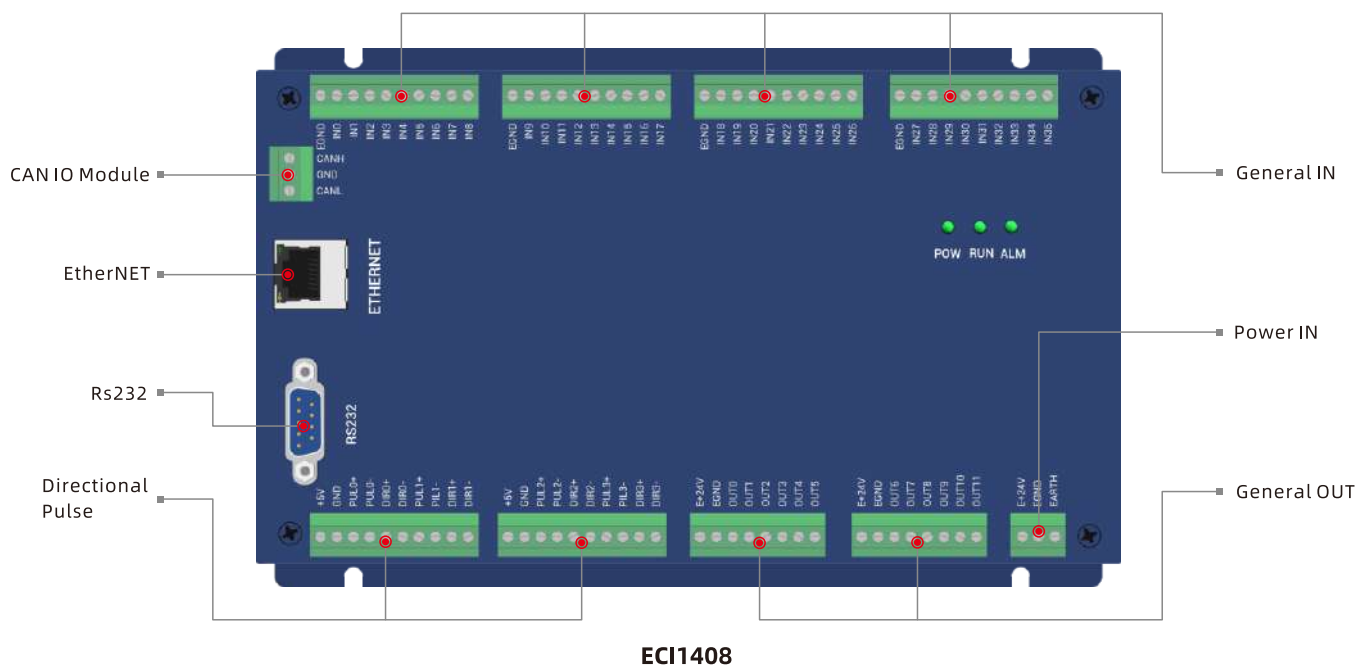

ECI1408

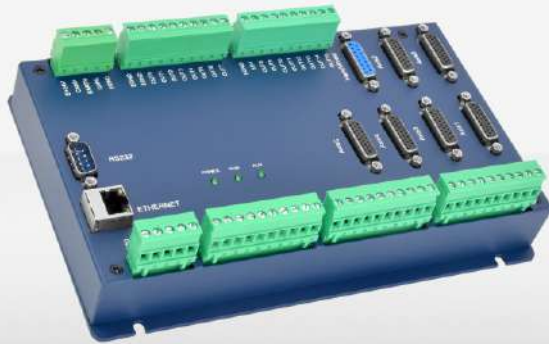

ECI2618B



ECI2828-V2

EtherCAT

## ECI2000 -- Pulse

[ECI2000](#) economical multi-axis motion control card is one pulse and modular type network card. Itself supports max 6 axes, 12 axes motion control can be extended to realize simple control, linear, circular, helical interpolation, etc.

**Applications:** within 12 pulse axes -- electronic semiconductor equipment (detection, assembly, locking, soldering), dispensing equipment, assembly line, etc.

### Functional Features

- Axis: up to 12-axis (include virtual-axis)
- IO: up to 30 INs & 20 OUTs
- Communication: RS232, EtherNET
- Analog: support ZCAN expansion, max 128 ADs & 64 DAs
- Pulse Mode: directional + pulse / dual-pulse
- Functions:
  01. support encoder input, which can be configured as handwheel mode.
  02. max 256 INs & 256 OUTs synchronously can be expanded by ZCAN.
  03. axis position limit, origin signal can be configured as any IN.
  04. max output current is 300mA, it can directly drive some solenoid valve.
  05. support electronic cam & gear, position latch, synchronization, virtual axis.
  06. support multi-file & multi-task programming.
  07. a variety of encryption methods to protect user's program.
- Performance:
  01. max pulse output frequency can reach 10MHz.
  02. support up to 12 axes for linear, circular, helical interpolation.
  03. support multi-machine independent continuous interpolation.









## ECI2000 -- EtherCAT

[ECI2828-V2](#) Series economical multi-axis motion control card is one bus and modular type network card. Itself supports max 8 axes, 16 axes motion control can be extended to realize simple control, linear, circular, helical interpolation, etc.

### Functional Features




- Axis: up to 16-axis (include virtual-axis)
- IO: up to 40 INs & 32 OUTs
- Communication: RS232, EtherNET, EtherCAT
- Analog: support ZCAN expansion, max 128 ADs & 64 DAs
- Pulse Mode: directional + pulse / dual-pulse
- Functions:
  01. support encoder input, which can be configured as handwheel mode.
  02. max 256 INs & 256 OUTs synchronously can be expanded by ZCAN.
  03. axis position limit, origin signal can be configured as any IN.
  04. max output current is 300mA, it can directly drive some solenoid valve.
  05. electronic cam & gear, position latch, synchronization, virtual axis.
  06. support multi-file & multi-task programming.
  07. a variety of encryption methods to protect user's program.
- Performance:
  01. max pulse output frequency can reach 10MHz.
  02. support up to 16 axes for linear, circular, helical interpolation.
  03. support multi-machine independent continuous interpolation.

## Models

Model	Image	Axis	En coder	Hand wheel	Pulse Frequency	Inner IN and OUT	Inner AD	Inner DA	Axis Motion Buffer	Space	Task	232	ECAT	NET	USB	Size (mm)	Functional Description
ECI2408		4	4	-	10M	24+4/8+4	-	-	128	4k	2	1	-	1	-	201*134	point, line, arc, cam, continuous interpolation
ECI2608		6	6	-	10M	24+6/8+6	-	-	128	4k	2	1	-	1	-	201*134	point, line, arc, cam, continuous interpolation
ECI2418B		4	4	1	10M	24+8/16+4	2	2	128	4k	3	1	-	1	-	220*139	point, line, arc, cam, continuous interpolation
ECI2618B		6	6	1	10M	24+12/16+6	2	2	128	4k	3	1	-	1	-	220*139	point, line, arc, cam, continuous interpolation
ECI2A18B		10	6	1	10M	24+12/16+6	2	2	128	4k	1	1	-	1	-	220*139	point, line, arc, cam, continuous interpolation
ECI2618BL5/L24		6	6	1	10M	24+12/16+6	2	2	128	4k	1	1	-	1	-	220*139	point, line, arc, cam, continuous interpolation
ECI2A18BL5/L24		10	6	1	10M	24+12/16+6	2	2	128	4k	1	1	-	1	-	220*139	point, line, arc, cam, continuous interpolation
ECI2828-V2		8	8	1	10M	24+16/16+16	2	2	512	128k	2	1	1	1	-	245*139	point, line, arc, cam, continuous interpolation

Note: models of ECI2418B, ECI2618B, ECI2A18B, ECI2618BL, ECI2828-V2. + HW means they support precision control, for fly-shooting, precision dispensing, etc.

## Interfaces

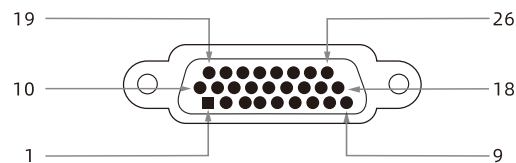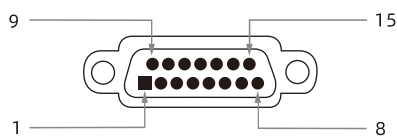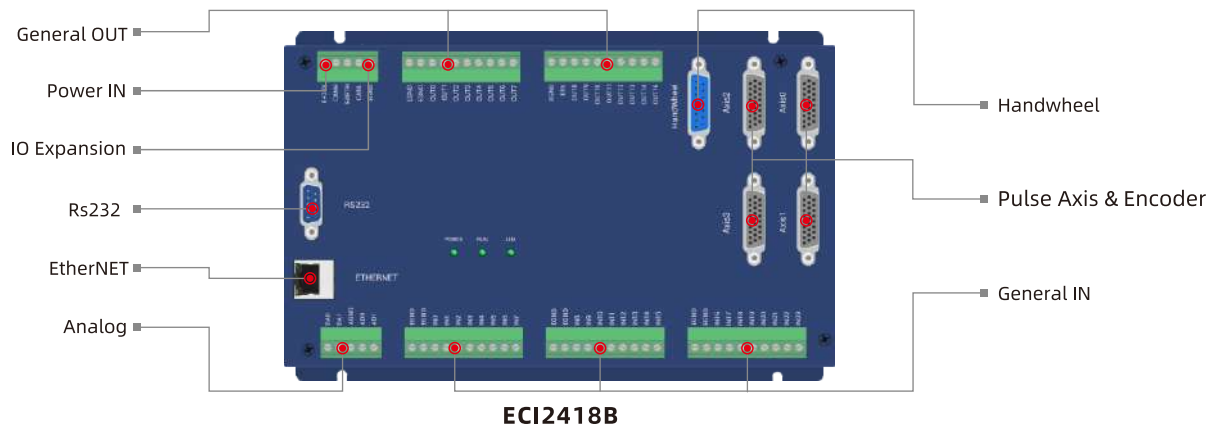

PIN No.	Name	Description
1	H-5V	Power for Handwheel
2	HA-	Encoder A
3	HB-	Encoder B
4	HEMGN	Emergency Stop
5	NC	-
6	HX1	Select X1 Ratio
7	HX10	Select X10 Ratio
8	HX100	Select X100 Ratio
9	HSU	Select Axis 3
10	NC	-
11	EGND	External Power Ground
12	NC	-
13	HSZ	Select Axis 2
14	HSY	Select Axis 1
15	HSX	Select Axis 0


PIN No.	Name	Description
1	EGND	External Power Ground
2	IN24-29/ALM	IN, better do Drive Alarm
3	OUT16-21/ENABLE	OUT, better do Drive Enable
4	EA-	Encoder Input
5	EB-	Encoder Input
6	EZ-	Encoder Input
7	+5V	Power Output
8	Reserved	Reserved
9	DIR+	Servo/Stepper Directional Out
10	GND	Digital Ground
11	PUL-	Servo/Stepper Pulse Out
12	Reserved	Reserved
13	GND	Digital Ground

PIN No.	Name	Description
14	OVCC	+24V Out - better only Servo IO
15	Reserved	Reserved
16	IN30-35/INPOS	IN (better do on-position)
17	EA+	Encoder Input
18	EB+	Encoder Input
19	EZ+	Encoder Input
20	GND	Digital Ground
21	GND	Digital Ground
22	DIR-	Servo/Stepper Directional Out
23	PUL+	Servo / Stepper Pulse Output
24	GND	Digital Ground
25	Reserved	Reserved
26	Reserved	Reserved

▲ Handwheel (DB15 Female Head) ECI2418B / ECI2618B

▲ Pulse & Encoder (DB26 Female Head) ECI2418B / ECI2618B

Note: refer to "User Manual" for more models and details.

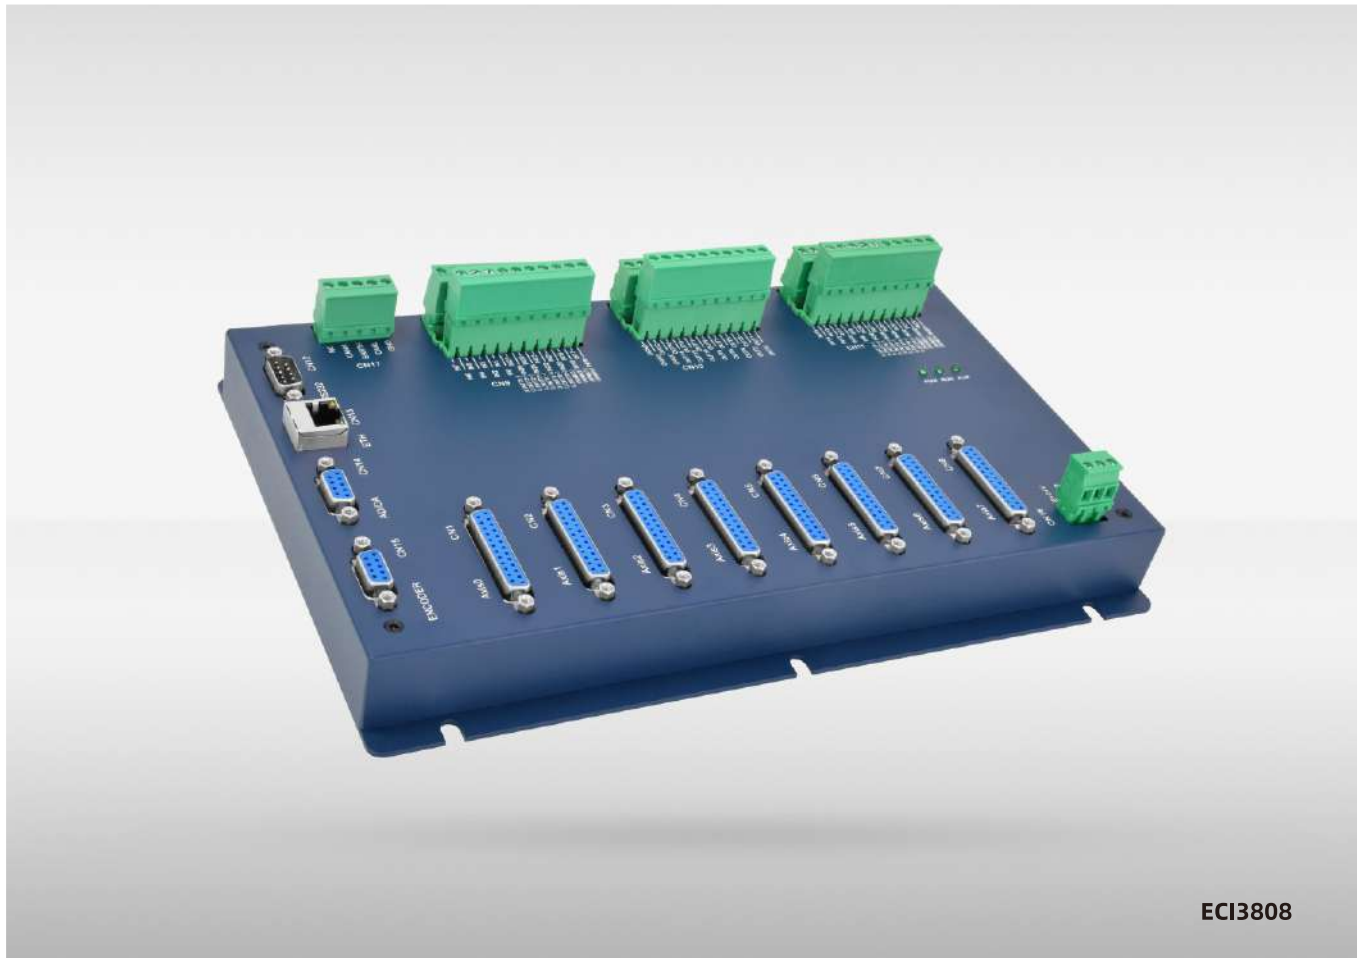

ECI3808

## ECI3000 Series



[ECI3000](#) economical multi-axis motion control card is one pulse type network card. Itself supports max 8 axes, 12 axes motion control can be extended to realize simple control, linear, circular, helical interpolation, etc.

**Applications:** within 10 pulse axes -- electronic semiconductor equipment (detection, assembly, locking, soldering), dispensing equipment, assembly line, etc.



### Functional Features

- Axis: up to 12-axis (include virtual-axis)
- IO: up to 48 INs & 32 OUTs
- Communication: RS232, EtherNET
- Analog: up to 4 ADs & 2 DAs, max 128 ADs & 64 DAs by ZCAN
- Pulse Mode: directional + pulse / dual-pulse
- Functions:
  01. support encoder input, which can be configured as handwheel mode.
  02. max 256 INs & 256 OUTs synchronously can be expanded by ZCAN.
  03. axis position limit, origin signal can be configured as any IN.
  04. max output current is 300mA, which can directly drive some solenoid valve.
  05. support electronic cam, electronic gear, position latch, synchronous follow, virtual axis, etc.
  06. support multi-file & multi-task programming.
  07. a variety of encryption methods to protect user's program.
- Performance:
  01. max pulse output frequency can reach 10MHz.
  02. support up to 12 axes for linear, circular, helical interpolation.
  03. support multi-machine independent continuous interpolation.

Models

Model	Image	Axis	En-coder	Pulse Frequency	Inner IN and OUT	Inner AD	Inner DA	Axis Motion Buffer	Space	Task	232	422	485	NET	USB	Size (mm)	Functional Description
ECI3608		6	6+1	10M	40+6/16+12	4	2	128	4k	1	1	-	-	1	-	292*188	point, line, arc, cam, continuous interpolation, robotic arm commands
ECI3808		8	8+1	10M	40+8/16+16	4	2	128	4k	1	1	-	-	1	-	292*188	point, line, arc, cam, continuous interpolation, robotic arm commands

Interfaces

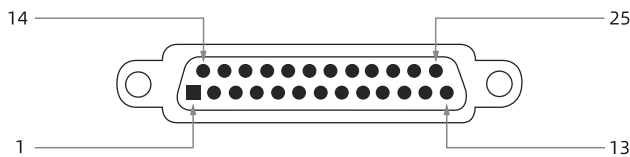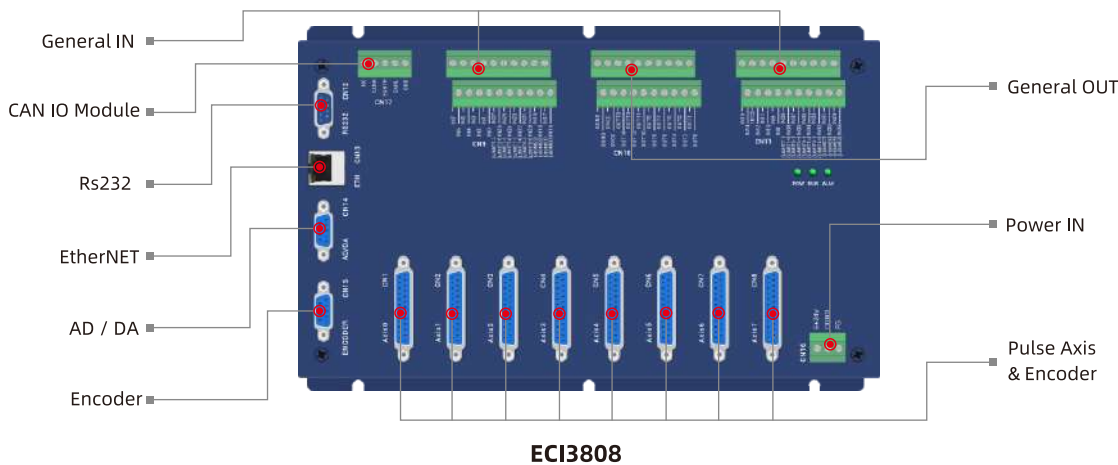

PIN No.	Name	Description
1	EGND	External Power Ground
2	IN40-47/ALM	General IN, better do Drive Alarm
3	OUT16 18.../ENABLE	OUT, better do Drive Enable
4	EA-	Encoder A -
5	EB-	Encoder B -
6	EZ-	Encoder Z -
7	Internal +5V Power	Internal +5V Power
8	Reserved	Reserved
9	DIR+	Directional Differential +
10	GND	Internal 0V
11	PUL-	Pulse Differential -
12	Reserved	Reserved

PIN No.	Name	Description
13	GND	Internal 0V
14	OVCC	+24V
15	OUT17 19.../CLR	OUT, better do Drive Alarm Clear
16	Reserved	Reserved
17	EA+	Encoder A +
18	EB+	Encoder B +
19	EZ+	Encoder Z +
20	GND	Internal 0V
21	GND	Internal 0V
22	DIR-	Directional Differential -
23	PUL+	Pulse Differential +
24	GND	Internal 0V
25	Reserved	Reserved

▲ Pulse & Encoder (DB25 Female Head) ECI3000 Series

Note: refer to "User Manual" for more models and details.



ECI382X

## ECI382X Card -- EtherCAT






[ECI382X](#) economical multi-axis motion control card is one bus and modular type network card. There are 4-12 axes for point, linear, circular, helical interpolation, etc., and it supports PSO function for vision fly-shooting, dispensing control, laser energy control.

**Applications:** within 12 axes (pulse & bus) -- 3C electronics, semiconductor equipment, dispensing equipment, non-standard equipment, etc.


### Functional Features

- Axis: 4-12 axes
- IO: 26 INs & 18 OUTs
- Communication: RS232, EtherNET, EtherCAT
- Analog: 2 ADs & 2 DAs, max 256 ADs & 128 DAs after expansion
- Pulse Mode: directional + pulse / dual-pulse
- Functions:
  01. EtherCAT synchronized period is 1ms.
  02. support encoder input, which can be configured as handwheel mode.
  03. max 4096 isolated INs & 4096 isolated OUTs synchronously can be expanded by EtherCAT.
  04. max output current is 300mA, which can directly drive some solenoid valve.
  05. support electronic cam & gear, position latch, synchronous follow, virtual axis, etc.
  06. axis position limit, origin signal can be configured as any IN.
  07. a variety of encryption methods to protect user's program.
- Performance:
  01. max pulse output frequency can reach 10MHz.
  02. support up to 16 axes (include virtual-axis) for linear interpolation, circular, interpolation, helical interpolation, continuous interpolation.
  03. support 1D/2D/3D PSO function for vision fly-shooting, dispensing control, laser energy control.

## Models

Model	Image	Axis	En-coder	Total Axes	Pulse Frequency	Inner IN and OUT	Inner AD	Inner DA	Axis Motion Buffer	Space	Task	232	422	485	NET	Size (mm)	Functional Description
ECI3428		4	2+2	16	10M	24+2/16+2	2	2	512	128k	1	1	1	1	1	205*135	point, line, arc, cam, continuous interpolation,
ECI3628		6	2+2	16	10M	24+2/16+2	2	2	512	128k	1	1	1	1	1	205*135	point, line, arc, cam, continuous interpolation,
ECI3828		8	2+2	16	10M	24+2/16+2	2	2	512	128k	1	1	1	1	1	205*135	point, line, arc, cam, continuous interpolation,
ECI3A28		10	2+2	16	10M	24+2/16+2	2	2	512	128k	1	1	1	1	1	205*135	point, line, arc, cam, continuous interpolation,
ECI3C28		12	2+2	16	10M	24+2/16+2	2	2	512	128k	1	1	1	1	1	205*135	point, line, arc, cam, continuous interpolation,

## Interfaces

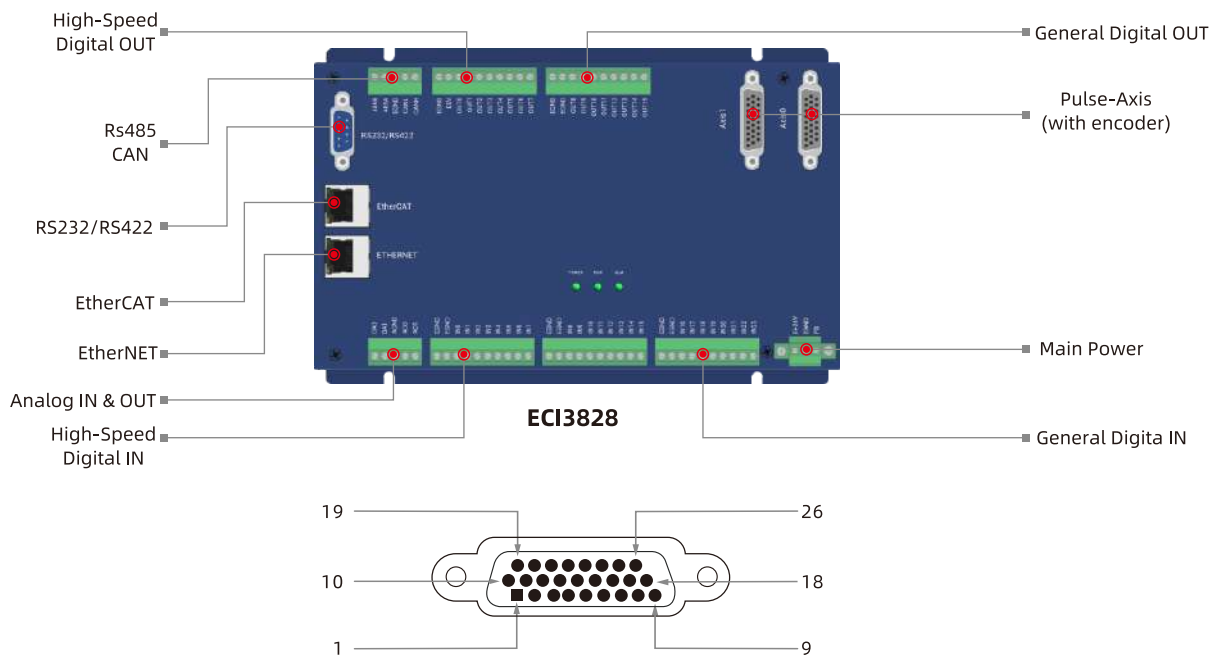



PIN No.	Name	Description
1	EGND	External Power Ground
2	IN24.../ALM	General IN, better do Drive Alarm
3	OUT16.../ENABLE	General OUT, better do Drive Enable
4	EA-	Encoder Input
5	EB-	Encoder Input
6	EZ-	Encoder Input
7	+5V	Internal +5V Power Output
8	Reserved	Reserved
9	DIR+	Servo/Stepper Directional Out
10	GND	Internal Power Ground
11	PUL-	Servo/Stepper Pulse Out
12	Reserved	Reserved
13	GND	Internal Power Ground

PIN No.	Name	Description
14	OVCC	E24V Output (better only for Servo IO)
15	Reserved	Reserved
16	Reserved	Reserved
17	EA+	Encoder Input
18	EB+	Encoder Input
19	EZ+	Encoder Input
20	GND	Internal Power Ground
21	GND	Internal Power Ground
22	DIR-	Servo/Stepper Directional Out
23	PUL+	Servo/Stepper Pulse Out
24	GND	Internal Power Ground
25	Reserved	Reserved
26	Reserved	Reserved

▲ Pulse & Encoder (DB26 Female Head)


Note: refer to "User Manual" for more models and details.

# PC-based Motion Control Card

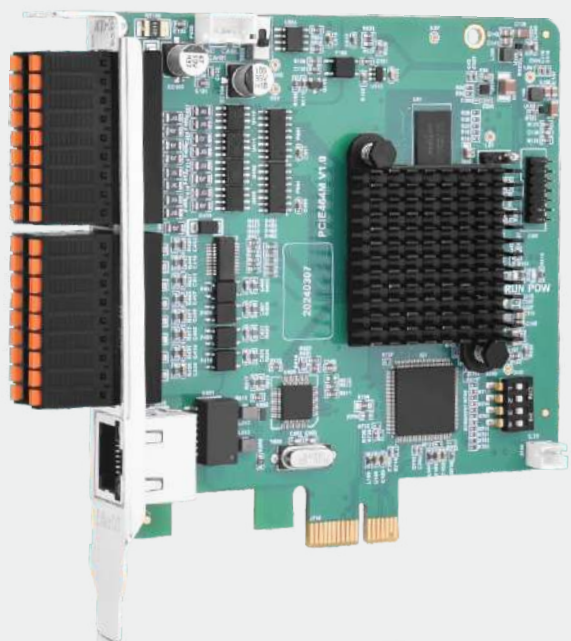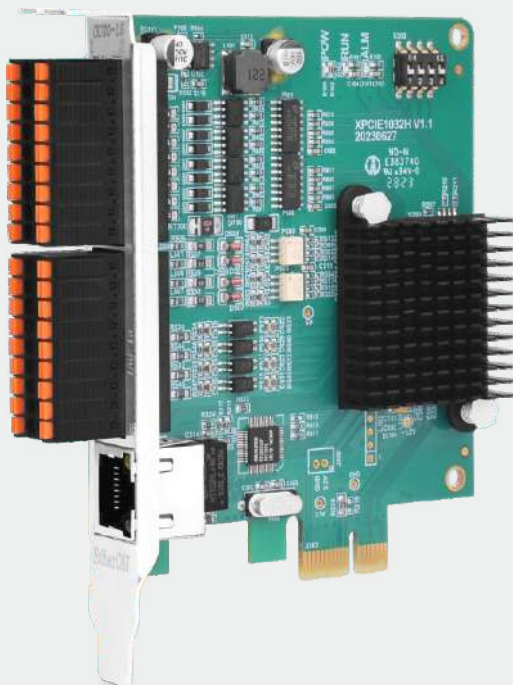



XPCIE1032H / PCIE464M

## PCI Bus Control Card System Diagram

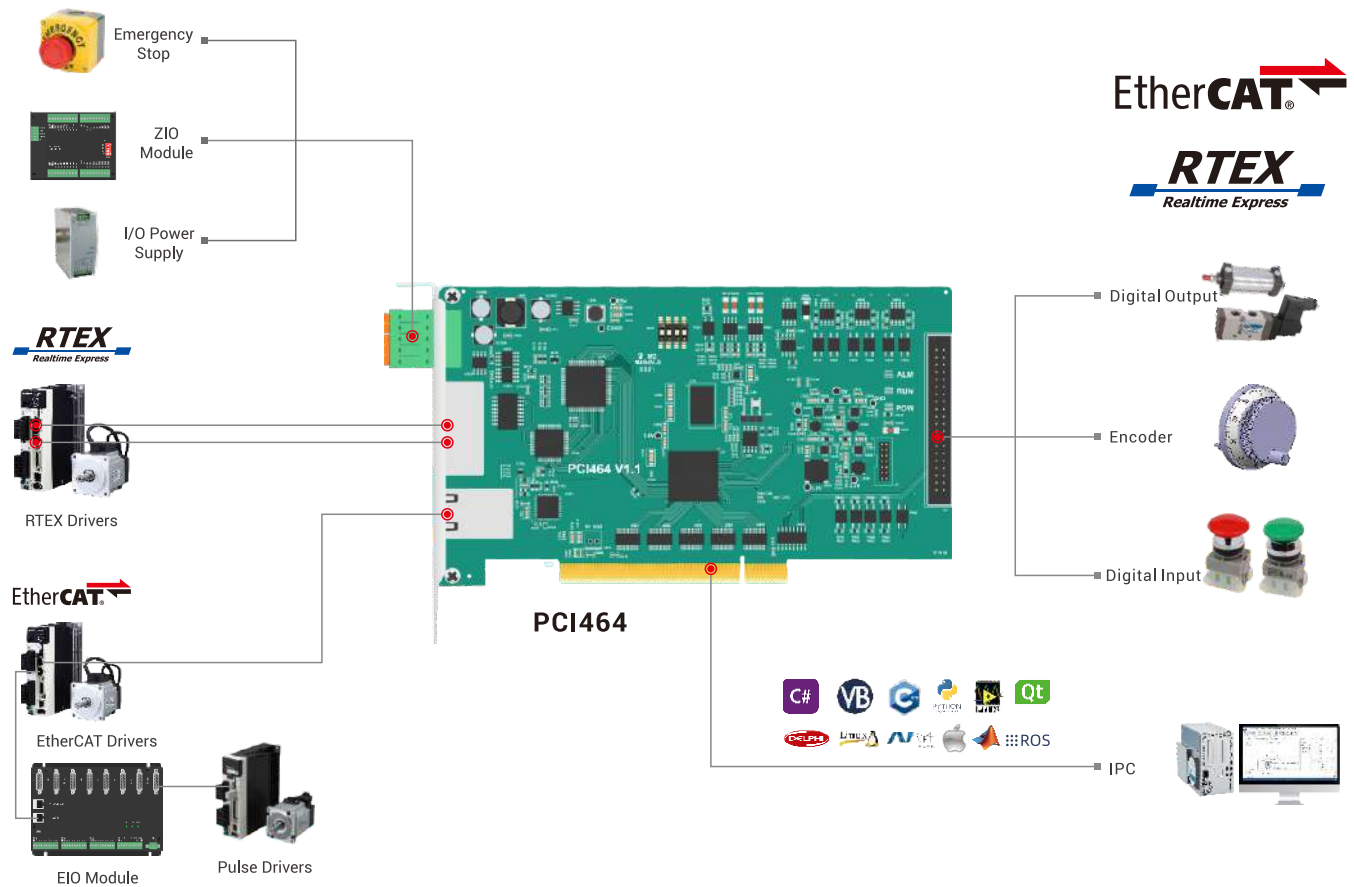

## XPCIE EtherCAT Control Card System Diagram

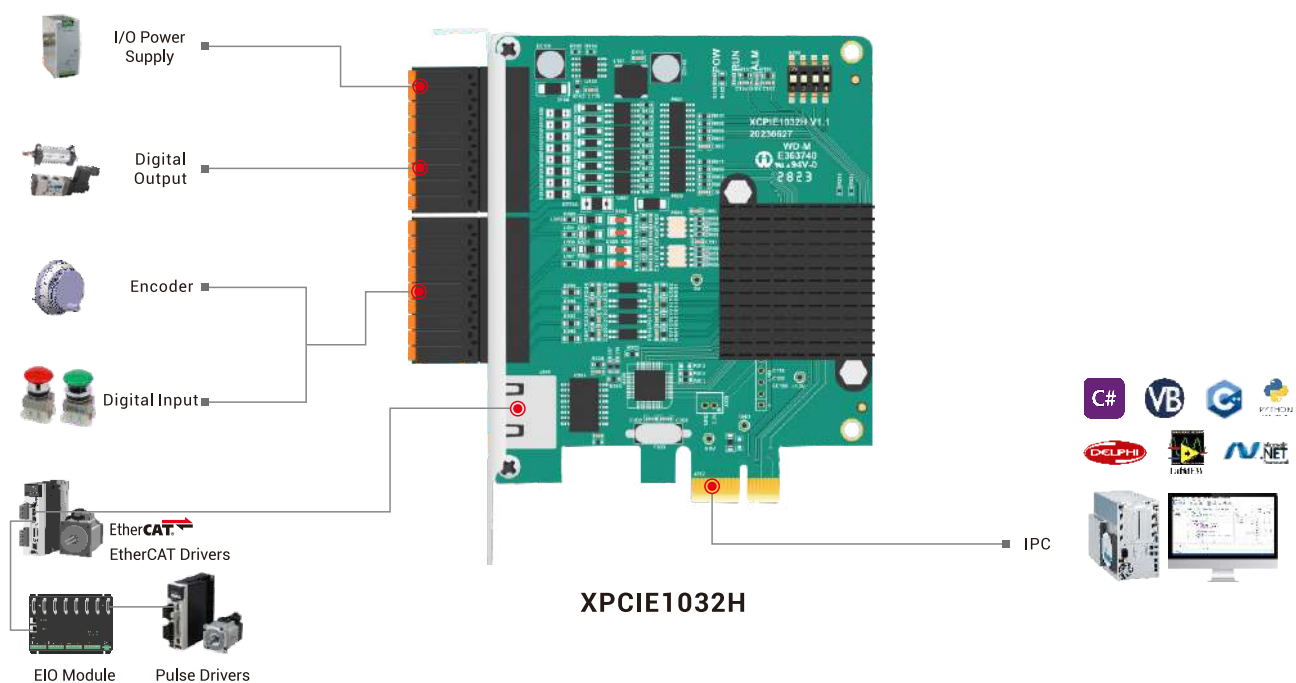

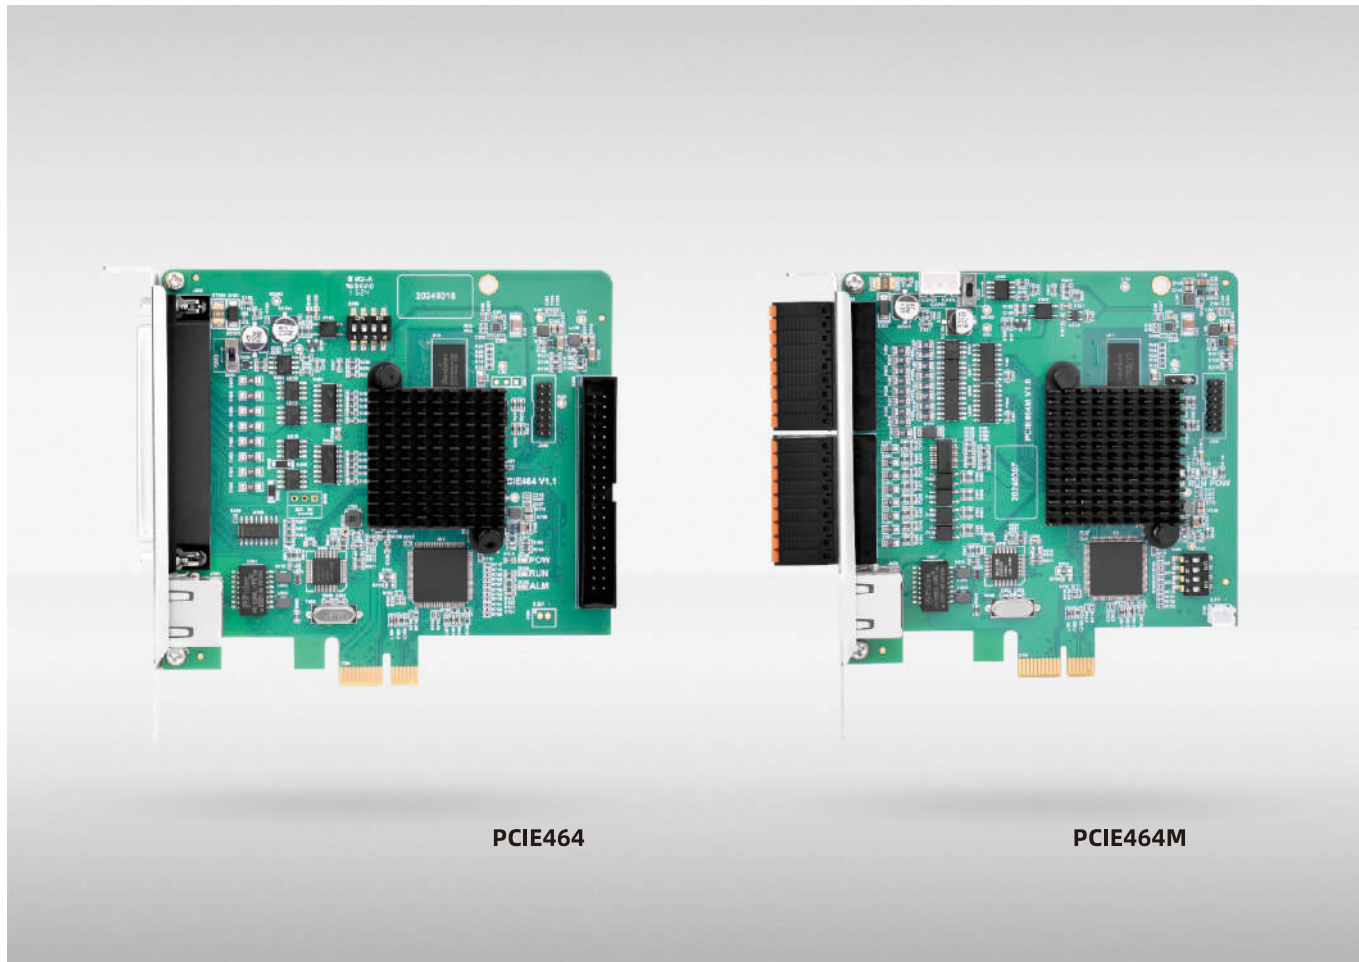

PCIE464

PCIE464M

## PCIE464

EtherCAT®







**PCIE464** motion control card is one EtherCAT and pulse type card that is with PCIe interface. It can control several stepper motors or digital servo motors. And it can achieve many functions, multi-axis point motion, interpolation, handwheel control, encoder position detection, IO control, position latch, etc.

**Applications:** high-speed & high-precision -- 3C electronics, detection equipment, semiconductor equipment, SMT processing, laser, optical communication equipment, lithium & photovoltaic, non-standard automatic equipment, etc.


### Functional Features

- Axis: 64 axes (EtherCAT)
- IO: 8 INs & 8 OUTs (more IO, please use with ACC37 together)
- Communication: PCIe
- Analog: max 128 ADs & 64 DAs after ZCAN expansion
- Pulse Mode: directional + pulse / dual-pulse
- Functions:
  01. support encoder input, which can be configured as handwheel mode.
  02. max 4096 INs & 4096 OUTs can be reached by EtherCAT / CAN.
  03. axis position limit, origin signal can be configured as any IN.
  04. max output current is 300mA, which can directly drive some solenoid valve.
  05. electronic cam & gear, position latch, synchronous follow, virtual axis, etc.
  06. support RTBasic multi-task running (real-time program).
    - support card inner C language real-time program running.
  07. PSO modes: high-speed vision fly shooting, dispensing, laser, etc.
  08. "power-off storage": encryption & protect user's program.
  09. valid operation systems: Windows7, Windows10, Windows11, Linux.
- Performance:
  01. 16-axis EtherCAT fastest refresh cycle is 100μs.
  02. max pulse output frequency can reach 10MHz.
  03. support max 16 axes for linear, circular, helical, elliptical interpolation.
  04. support multi-machine independent continuous interpolation.
  05. support hybrid interpolation of EtherCAT + pulse axes.





Models


Model	Image	Axis	En coder	Pulse Fre- quency	Inner IN & OUT	Program Space	PWM	High- Speed Latch	High- Speed HW	Motion Buffer	ECAT	Size (mm)	Functions
PCIE464-AX16		16	3	10M/500k	8+16/8+16	1920k	8	4	8	4096	1	144*120	point motion, cam, linear, circular, continuous interpolation, robotic arm.
PCIE464-AX32		32	3	10M/500k	8+16/8+16	1920k	8	4	8	4096	1	144*120	point motion, cam, linear, circular, continuous interpolation, robotic arm.
PCIE464-AX64		64	3	10M/500k	8+16/8+16	1920k	8	4	8	4096	1	144*120	point motion, cam, linear, circular, continuous interpolation, robotic arm.
PCIE464M-AX16		16	3	500kHz	16/16	1920k	4	4	12	4096	1	105*120	point motion, cam, linear, circular, continuous interpolation, robotic arm.
PCIE464M-AX32		32	3	500kHz	16/16	1920k	4	4	12	4096	1	105*120	point motion, cam, linear, circular, continuous interpolation, robotic arm.
PCIE464M-AX64		64	3	500kHz	16/16	1920k	4	4	12	4096	1	105*120	point motion, cam, linear, circular, continuous interpolation, robotic arm.

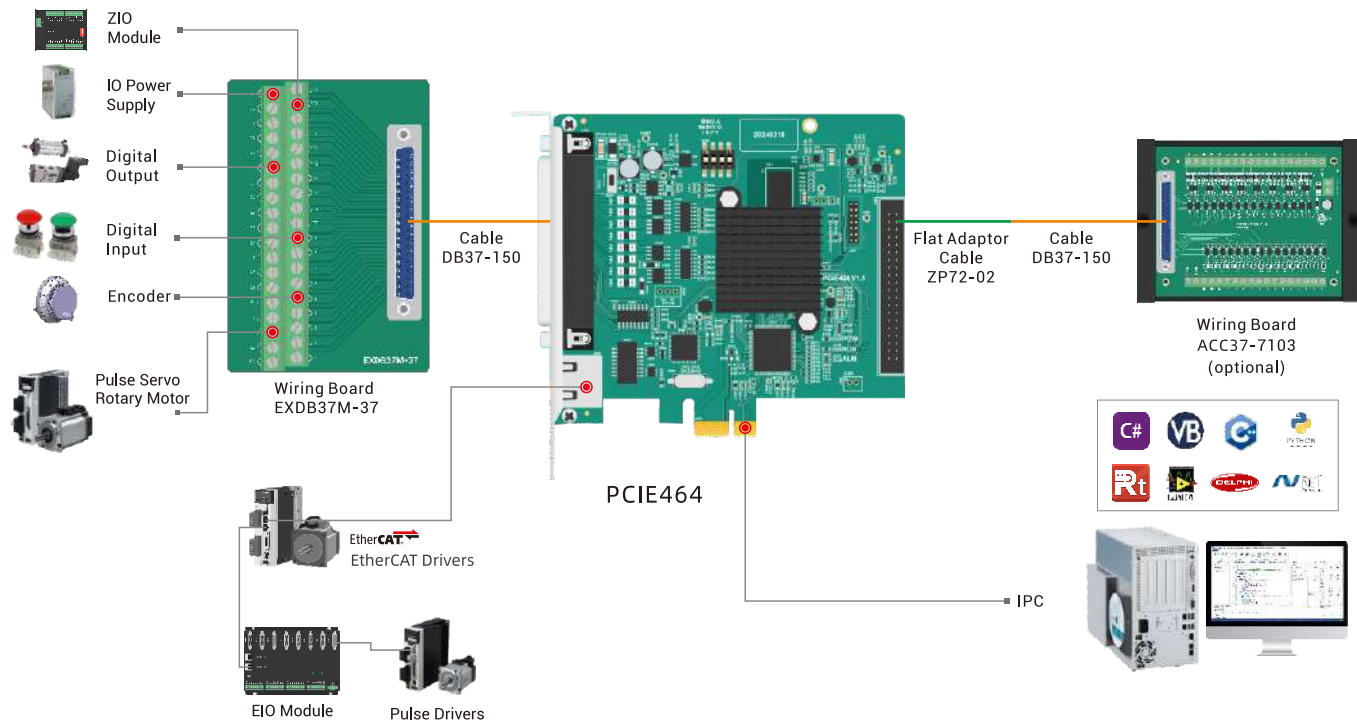Interfaces



PCIE464 Motion Control Card Configuration Solution

Configuration	Name	Specification	Description	Image	Number
Optional Accessories for Expanding IO	Wiring Board	EXDB37M-37	DB 37 wiring board		1
	Shielded Cable	DB37-150	DB37 cable, chip male-to-male		2
	Wiring Board	ACC37-7103	16 IN & 16 OUT wiring board after changing from IDC40 to DB37		1
	Adapter Cable	ZP72-02	flat cable from 40P plug to DB37 female head		1

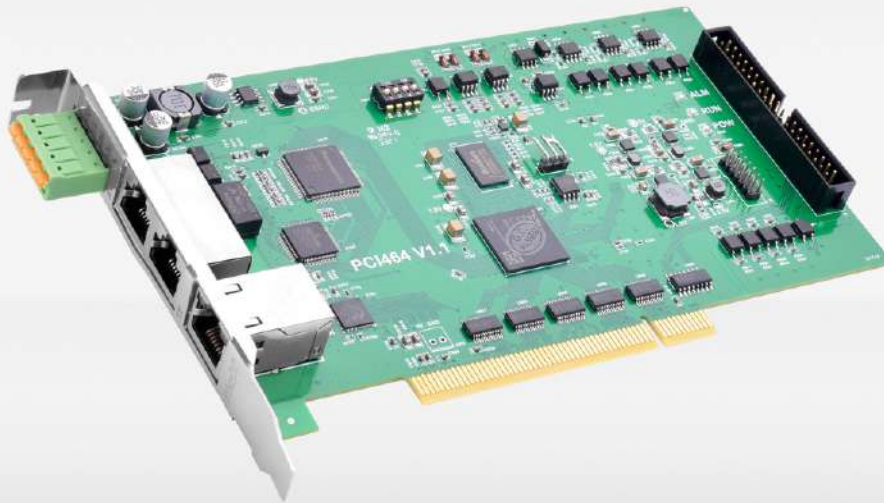

PCI1464

## PCI Bus Motion Control Card

EtherCAT®

**RTEX**  
Realtime Express







**PCI** high-performance multi-axis card is one bus type control card (EtherCAT & RTEX). Itself supports max 64 axes to realize complex continuous trajectory control, like, linear, circular, helical, elliptical interpolation.

**Applications:** robot (SCARA, Delta, 6-joint), electronic semiconductor equipment (detection, assembly, locking, soldering), dispensing, laser, non-standard, printing & packaging, textile & garment, stage entertainment equipment, medical equipment, assembly line, etc.


### Functional Features

- Axis: 64 axes (EtherCAT), 32 axes (RTEX)
- IO: 8 INs & 8 OUTs
- Communication: PCI
- Analog: max 128 ADs & 64 DAs after ZCAN expansion
- Functions:
  01. support encoder input, which can be configured as handwheel mode.
  02. max 4096 INs & 4096 OUTs can be reached by EtherCAT / CAN.
  03. axis position limit, origin signal can be configured as any IN.
  04. max output current is 300mA, which can directly drive some solenoid valve.
  05. electronic cam & gear, position latch, synchronous follow, virtual axis, etc.
  06. support pulse closed-loop, pitch compensation.
  07. support multi-file & multi-task programming.
  08. a variety of encryption methods to protect user's program
  09. support power failure detection & power failure storage.
- Performance:
  01. 16-axis EtherCAT fastest refresh cycle is 100μs.
  02. support max 16 axes for linear, circular, helical, elliptical interpolation.
  03. support multi-machine independent continuous interpolation.
  04. support hybrid interpolation of EtherCAT/RTEX + pulse axes.




## Models

Model	Image	Axis	Encoder	Inner IN and OUT	Axis Motion Buffer	Space	Task	Power Down Store	ECAT	RTEX	Size (mm)	Functional Description	Optional Accessories
PCI406E		6	1	8/8	512	1920k	22	8000	1	-	158*120	point, line, arc, cam, continuous interpolation, robot	adapter cable (ZP72-02) shielded cable (DB37-150) wiring board (EXDB37M-37)
PCI408E		8	1	8/8	512	1920k	22	8000	1	-	158*120	point, line, arc, cam, continuous interpolation, robot	adapter cable (ZP72-02) shielded cable (DB37-150) wiring board (EXDB37M-37)
PCI412E		12	1	8/8	512	1920k	22	8000	1	-	158*120	point, line, arc, cam, continuous interpolation, robot	adapter cable (ZP72-02) shielded cable (DB37-150) wiring board (EXDB37M-37)
PCI464-16		16	1	8/8	512	1920k	22	8000	1	1	158*120	point, line, arc, cam, continuous interpolation, robot	adapter cable (ZP72-02) shielded cable (DB37-150) wiring board (EXDB37M-37)
PCI464-32		32	1	8/8	512	1920k	22	8000	1	1	158*120	point, line, arc, cam, continuous interpolation, robot	adapter cable (ZP72-02) shielded cable (DB37-150) wiring board (EXDB37M-37)
PCI464		64	1	8/8	512	1920k	22	8000	1	1	158*120	point, line, arc, cam, continuous interpolation, robot	adapter cable (ZP72-02) shielded cable (DB37-150) wiring board (EXDB37M-37)
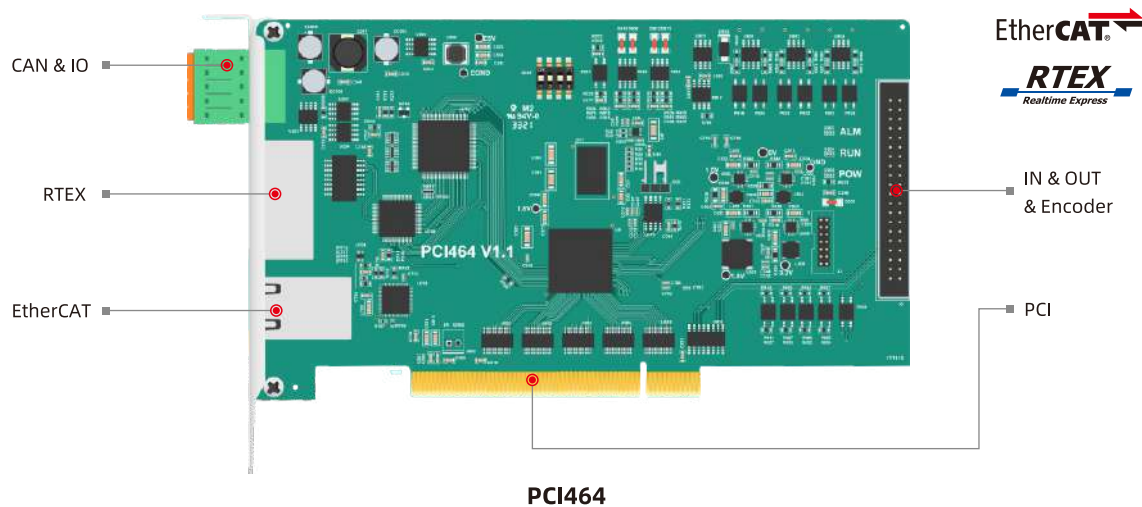
## Interfaces




## PCI464 Motion Control Card Configuration Solution

Configuration	Name	Specification	Description	Image	Number
Optional Accessories for Expanding IO	Wiring Board	EXDB37M-37	Db37 wiring board		1
	Adapter Cable	ZP72-02	flat cable from 40P plug to DB37 female head		1
	Shielded Cable	DB37-150	DB37 cable, chip male-to-male		1



XPCIE1028

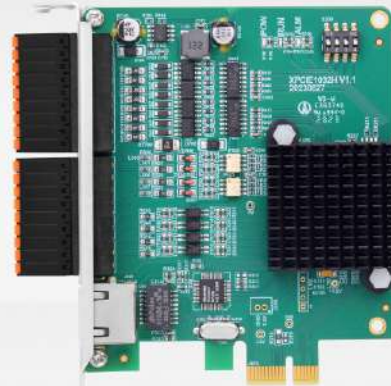

XPCIE1032H

## XPCIE Motion Control Card

EtherCAT®

**XPCIE** economical motion control card is one EtherCAT and pulse type card that is with PCIE interface. Itself supports 6-64 axes to achieve linear, circular, helical interpolation, electronic cam, electronic gear, synchronous follow, virtual axis, robot etc.

**Applications:** high-speed & high-precision -- 3C electronics, detection equipment, semiconductor equipment, SMT processing, laser, optical communication equipment, lithium & photovoltaic, non-standard automatic equipment, etc.



### XPCIE1032H Function Features:

- Axis: max 64 axes (4 single-ended pulse outputs)
- IO: 16 INs / 16 OUTs
- Pulse Mode: directional + pulse
- Pulse Frequency: 500KHz
- Functions:
  01. EtherCAT communication, lowest synchronous period is 500us.
  02. max 512 isolated inputs and 512 isolated outputs by EtherCAT modules.
  03. encoder position measurement can be set as handwheel input mode.
  04. electronic cam, electronic gear, synchronous follow, virtual axis, etc.
  05. support linear, circular, helical interpolation.
  06. support several PC development languages, C#/C++/LabVIEW,etc.
  07. support multi-file & multi-task programming.
  08. a variety of encryption methods to protect user's program
  09. 1D/2D/3D PSO function for vision fly-shooting, dispensing & laser energy control.

### XPCIE1028 Function Features:


- XPCIE1028 Function Features:
- Axis: 4 axes (1 differential pulse OUT + 3 single-ended pulse OUTs)
- IO: 12+18 INs / 16+18 OUTs
- Pulse Mode: directional + pulse / dual-pulse
- Pulse Frequency: 10MHz/500KHz
- Functions:
  01. specialized for optical / disk screening machine.
  02. 16 hardware position comparison high-speed outputs for vision fly-shooting detection, screening (blowing and outputting).
  03. 8 high-speed latch INs to record materials' position.
  04. specialized axis interface is for controlling 10MHz pulse output and encoder measurement.
  05. support electronic cam, linear, circular, helical interpolation.

Models



Model	Image	Axis	Encoder	Pulse Frequency	Inner IN and OUT	PWM	High-Speed IN	High-Speed OUT	Motion Buffer	ECAT	Size (mm)	Functional Description
XPCIE1032H		64	2	500kHz	16/16	4	8	16	128	1	90*106	point, line, arc, cam, continuous interpolation, robot
XPCIE1028		4	2	10MHz 500kHz	12+18/16+18	4	8	16	128	-	120*106	point, line, arc, cam, continuous interpolation, robot

Note: above cards should be used together with MotionRT7 software. Please check manual for details.



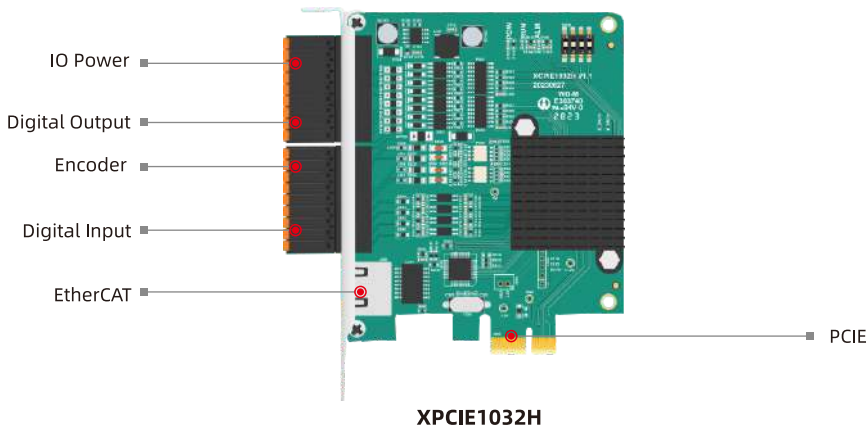

Interfaces

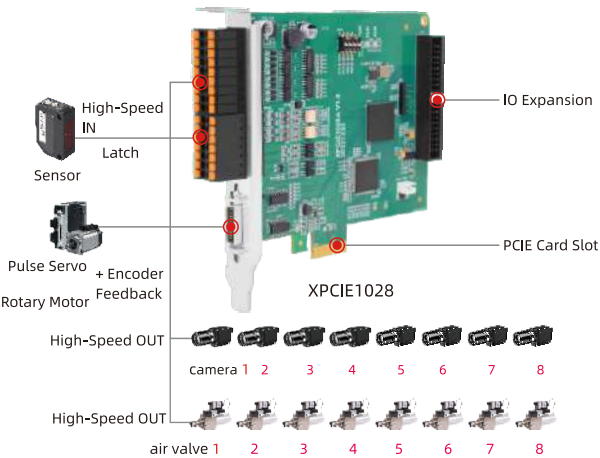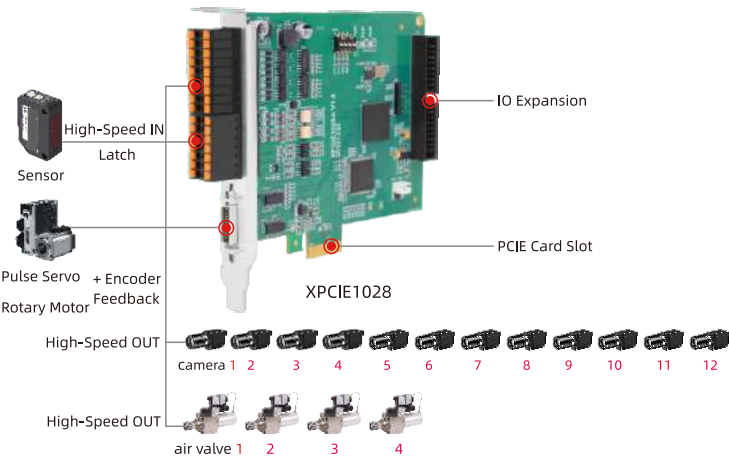

XPCIE1028 Vision Screening Machine Solution




XPCIE1028 Motion Control Card Configuration Solution

	Configuration	Name	Specification	Description	Image	Number
	Optional Accessories for Expanding IO	Wiring Board	EXDB37M-37	Db37 wiring board		1
		Adapter Cable	ZP72-02	flat cable from 40P plug to DB37 female head		1
		Shielded Cable	DB37-150	DB37 cable, chip male-to-male		1

## Provide Complete "Vision Screening Machine Motion Control Solution"

Break the Industry "Velocity" Bottleneck -- Reach **15000+pcs/min** IO Triggering Detection Speed!

[XPCIE1028H](#) motion control card can be used in full-automatic CCD optical screening machine. And Zmotion provides one complete debugging software specialized for screening machine, which can reach 15000+pcs/min IO triggering detection speed. It only needs to set parameters, and uses together with camera and vision processing software, then it can realize full-automatic CCD vision screening. In this way, development period is shortened, and cost is reduced.

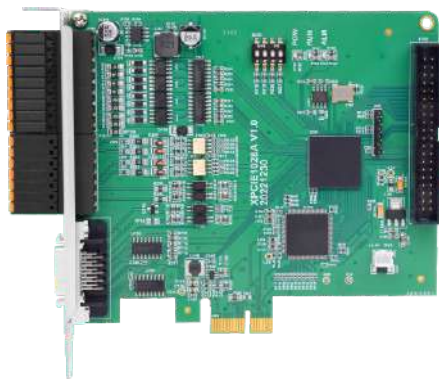

**XPCIE1028**

PCIe Interface, Inner Data Interaction




## Functions Introduction




01. Channel: set how many cameras, air valves.
02. Operation Data: watch how many detected & operated.
03. Communication Mode: set how to communicate with vision
04. Sample Space: set how long sample once
05. Heartbeat Detection: control vision & screening
06. Filtering Size: sense & filter materials' size
07. Camera Feedback IO & Report Actively: feedback the signal for control interaction after the signal is triggered by camera.
08. Fiber Offset Ratio: set the ratio of fiber physical distance offset
09. Debugging: manually debug -- operate turntable axis

## Screening Machines

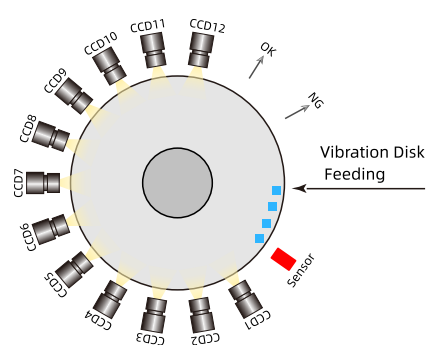

**Disc High-Speed Screening**

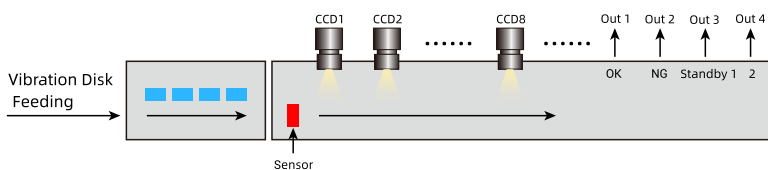

**Assembly Line High-Speed Screening**


# IO Module




**ZMC432M+ZMIO310**

**ZMIO310**


## EtherCAT Expansion Module

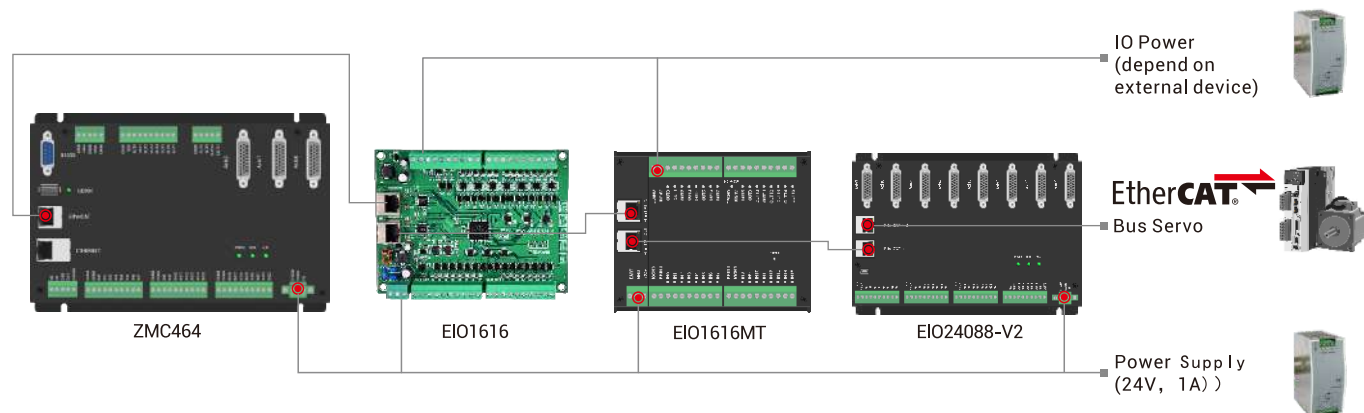

## ZCAN Expansion Module

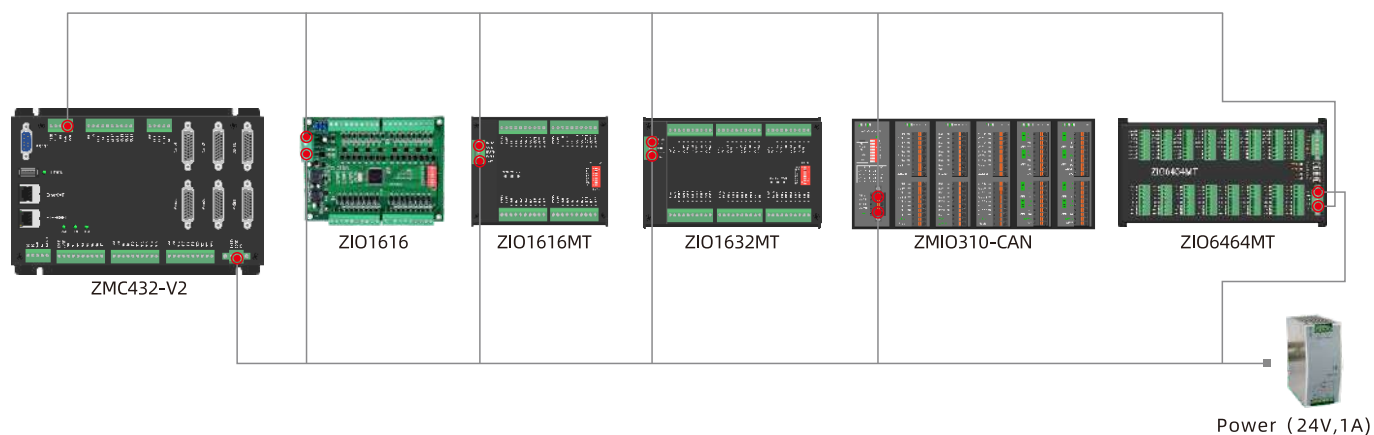

## ZMIO310 Expansion Module

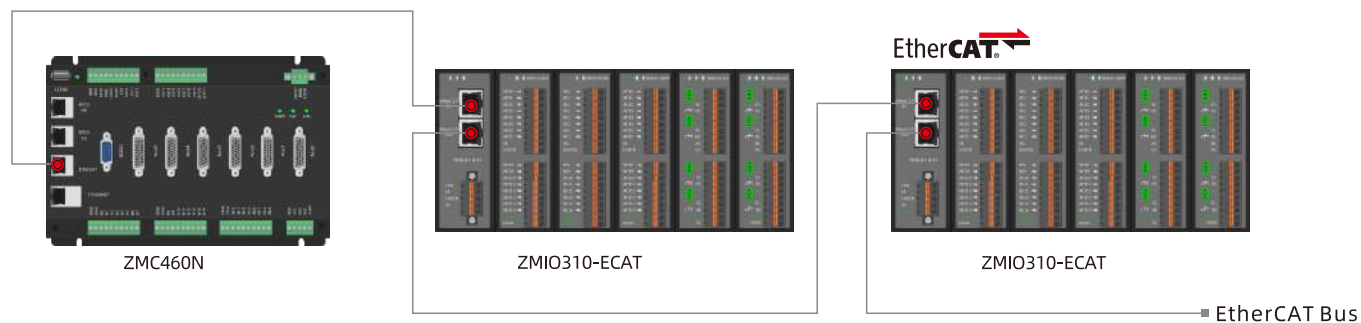



# EtherCAT Expansion Module

[EtherCAT expansion modules](#), they can expand multiple pulse axes and IO.


### Functional Features


- Axis: 8 pulse axes can be expanded at most
- IO: up to 16 inputs & 16 outputs
- Performance:
  - 01. EtherCAT fastest refresh period is 250μs.

### Models

Model	Image	Axis	Encoder	Total Axes	Inner IN and OUT	ECAT IN/ECAT OUT	Size (mm)	Functional Description
EIO1616MT		-	-	-	16/16	1/1	143*107	Module Mode: EIO1616M Module with Cover: EIO1616MT
EIO16084		4	4	4	16/8	1/1	170*133	4-Axis Axis Expansion
EIO24088-V2		8	8	8	24/8	1/1	210*147	8-Axis Axis Expansion

### Interfaces

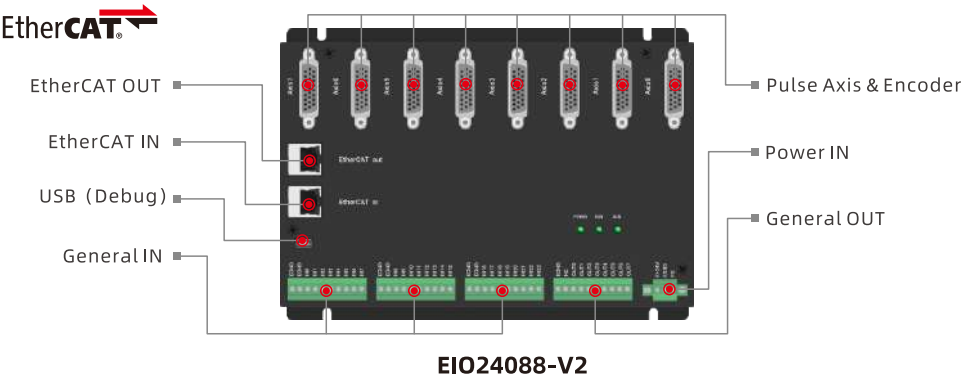

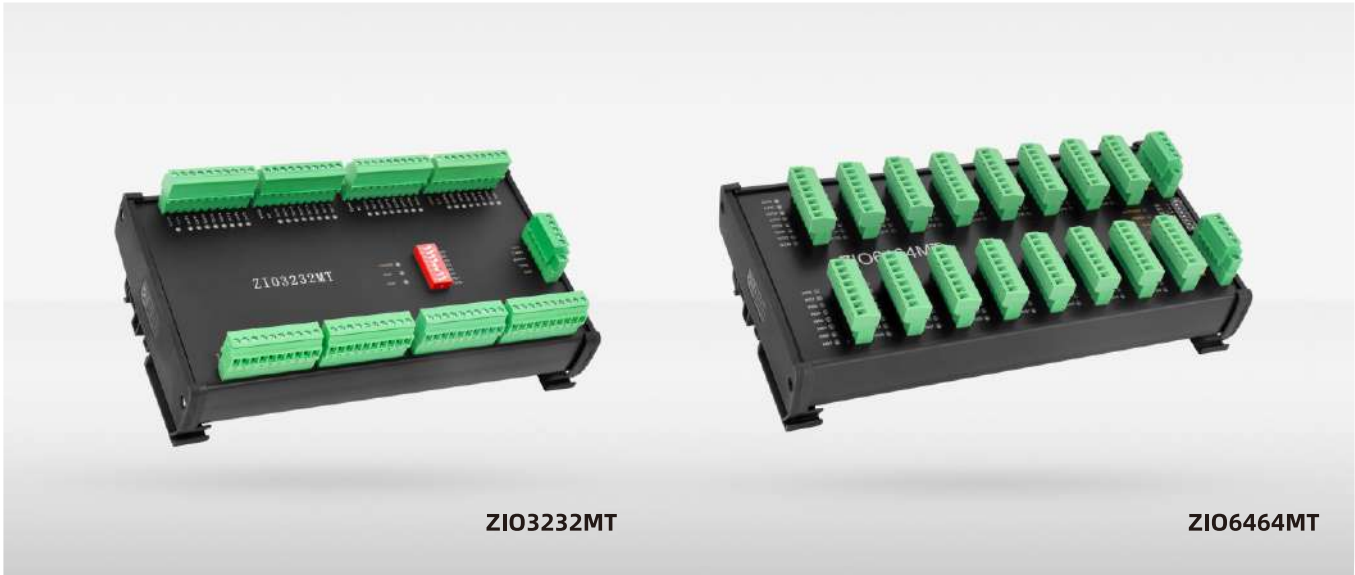

# ZCAN Expansion Module

[ZCAN expansion modules](#), they can expand 2 pulse axes (at most) and IO.



## Functional Features

► Axis: 2 pulse axes can be expanded at most      IO: 16 INs & 16 OUTs / 32 INs & 32 OUTs / 64 INs & 64 OUTs (PCB/module/cover type)

## Models

Model	Image	Axis	Encoder	Total Axes	Inner IN and OUT	AD	DA	Size (mm)	Functional Description
ZIO0808		-	-	-	8/8	-	-	98*72	Module Type: ZIO0808M
ZIO0016		-	-	-	0/16	-	-	98*72	Module Type: ZIO0016M
ZIO1608		-	-	-	16/8	-	-	126*99	Module Type: ZIO1608M
ZIO1616		-	-	-	16/16	-	-	142*107	Module Type: ZIO1616M
ZIO1616-PNP		-	-	-	16/16	-	-	142*107	Module Type: ZIO1616M-PNP
ZIO1632		-	-	-	16/32	-	-	192*107	Module Type: ZIO1632M
ZIO3232MT		-	-	-	32/32	-	-	192*109	Module with Cover: ZIO1632MT
ZIO6464MT		-	-	-	64/64	-	-	208*100	-
ZAIO0802		-	-	-	-	8 (12bit)	2 (12bit)	120*72	Module Type: ZAIO0802M
ZIO16082		2	2	2	16/8	-	-	126*106	Module Type: ZIO16082M

## Interfaces

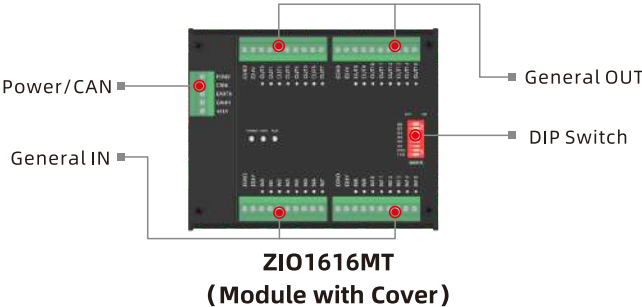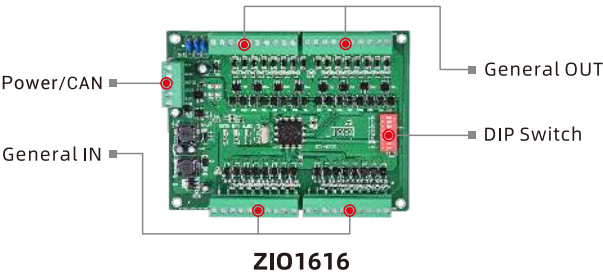










# ZMIO310 Expansion Module

ZMIO310 expansion module is one vertical module, it supports expanding IO and AIO. One coupler supports up to 16 sub-modules.

## Functional Features

- IO: one single coupler supports 256 inputs / 256 outputs at most.
- AIO: one single coupler supports 32 ADs / 32 DAs at most.

## Models

Model	Image	Digital IN	Digital OUT	AD	DA	Communication	Size (mm)	Functional Description
ZMIO310-CAN		-	-	-	-	ZCAN	108*32*95mm	ZCAN Expansion Module
ZMIO310-ECAT		-	-	-	-	ECAT IN/ECAT OUT	108*32*95mm	ECAT Communication Module
ZMIO310-16DI		16	-	-	-	-	108*32*95mm	Input Module (NPN/PNP)
ZMIO310-16DO		-	16	-	-	-	108*32*95mm	Output Module (NPN)
ZMIO310-16DOP		-	16	-	-	-	108*32*95mm	Output Module (PNP)
ZMIO310-4AD		-	-	4	-	-	108*32*95mm	AD Module (16bit)
ZMIO310-4DA		-	-	-	4	-	108*32*95mm	DA Module (16bit)

## Interfaces



## ZMIO310 EtherCAT Bus Module

# HMI



ZHD500X POE Power  
ZHD500XB 24V Power



ZHD400X

# HMI

**ZHD HMI** is one open programmable teach pendant that supports "touch screen". Develop interface program by RTBasic in RTSys, and it supports online debugging.

## Functional Features

► Button: up to 47 for ZHD300/ZHD300X ► Functions:

► Communication: EtherNET






► Protocol: MODBUS / custom

01. support touch screen programming

02. it is with "emergency stop" button

03. ZHD400 can be used together with all kinds of controllers, but ZHD300X/ZHD400X/ZHD500X only match with controllers that support RTHMI function.

## Models

Models	Image	Resolution	Size (mm)	Button	Emergency Stop	Valid Protocol	Functional Description
ZHD300X		480*272	280*131	47	YES	HMI Protocol	it supports touch screen, and can be used with button and touch. But the controller must support RTHMI function, and the development software ZDevelop must be above V2.70.
ZHD400		800*480	230*165	18	YES	MODBUS Protocol HMI Protocol	it supports touch screen, and can be used with button and touch.
ZHD400X		800*480	230*165	18	YES	HMI Protocol	it supports touch screen, and can be used with button and touch. But the controller must support RTHMI function, and the development software ZDevelop must be above V2.70.
ZHD500X		1024*600	313*237	16	YES	HMI Protocol	it supports touch screen, and can be used with button and touch, power is supplied by POE. But the controller must support RTHMI function, and the development software ZDevelop must be above V3.10.
ZHD500XB		1024*600	313*327	16	YES	HMI Protocol	it supports touch screen, and can be used with button and touch, power is supplied by 24V. But the controller must support RTHMI function, and the development software ZDevelop must be above V3.10.

## Interfaces


PIN No.	Name	Description
1	TX+	Send Data + (Tranceive Data+)
2	TX-	Send Data - (Tranceive Data-)
3	RX+	Receive Data + (Receive Data +)
4	n/c	-
5	n/c	-
6	RX-	Receive Data - (Receive Data -)
7	n/c	-
8	n/c	-
-	Red Line	24V
-	Black Line	0V
-	Yellow Line	Emergency Stop Signal

▲ Rj45 Crystal Head (ZHD300X, ZHD400, ZHD400X, ZHD500XB)



Note: ZHD500X power supply is POE power, it needs to use the equipment that is with POE function.

# HMI Solutions


## HMI Display Solution 1: Open CNC

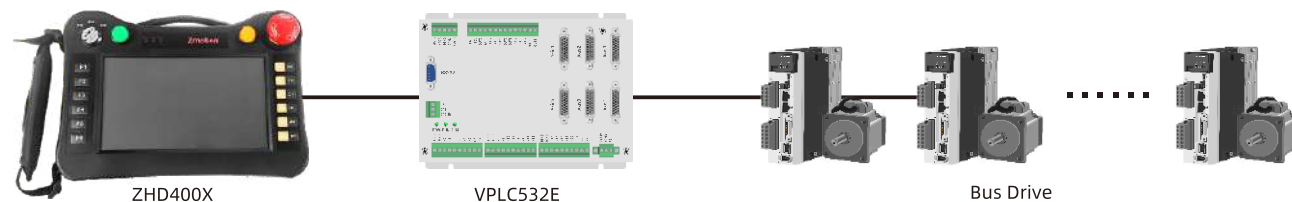

## HMI Display Solution 2: Open SCARA

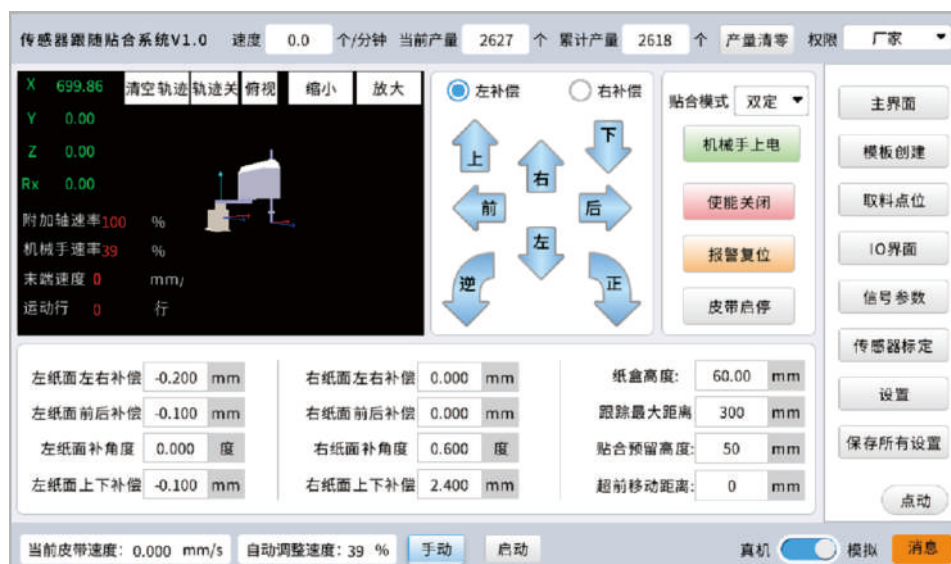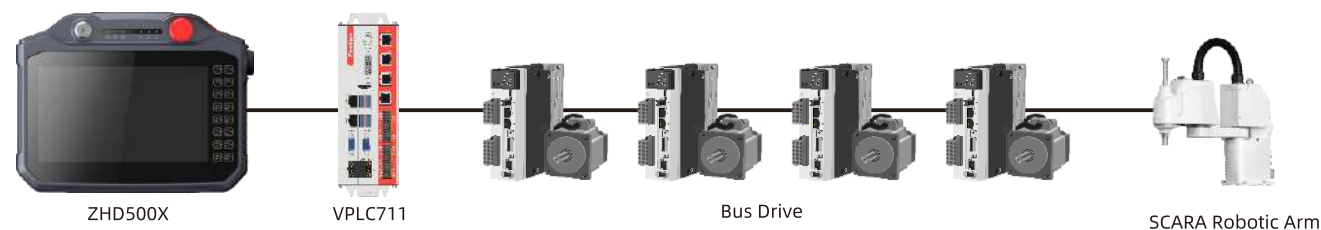

HMI Display Solution 3: 3-Axis SCARA Intelligent Locking

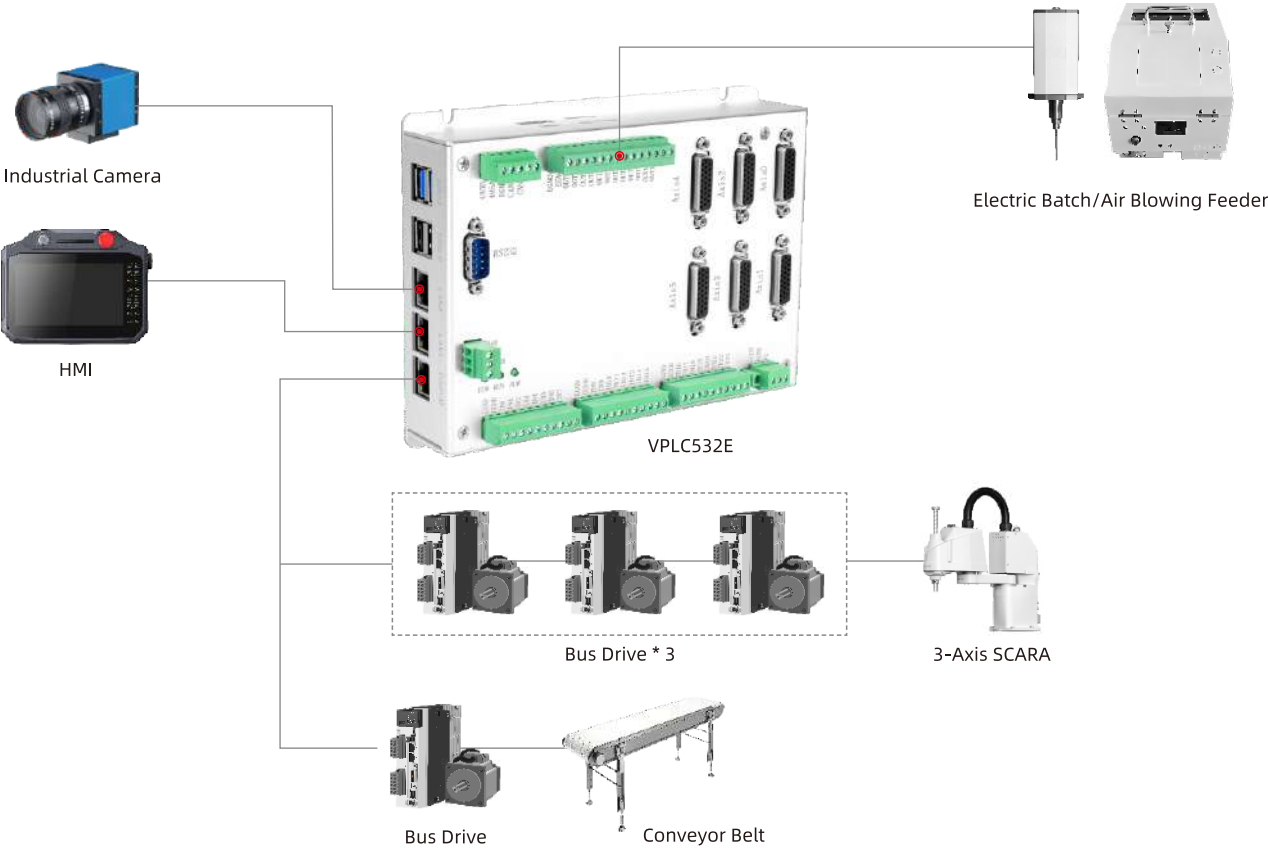

管理员  
正运动·Zmotion

未上电

启动

停止

复位

设备参数

当前速度0%

机种文件工件

绑定条码无

当前条码无

锁付结果

序号	扭矩(kgf.cm)	圈数(r)	状态	NG次数	浮高高度	锁付高度	锁付时间
9	1.18	1.89	OK	0	0.00	10.81	2.71
10	1.18	1.89	OK	0	0.00	10.81	2.71
11	1.18	1.89	OK	0	0.00	10.81	2.71
12	1.18	1.89	OK	0	0.00	10.81	2.71
13	1.18	1.89	OK	0	0.00	10.81	2.71
14	1.18	1.89	OK	0	0.00	10.81	2.71

拍照照片

主Mark拍照点

副Mark拍照点

生产统计

重置

产品总数	243	产品不良	0	产品良率	100%	节拍	2.47s
锁付总数	1944	锁付不良	6	锁付良率	99%	滑牙	1
抛料次数	6	拍照NG	13	扫码NG	0	浮高	5

生产监视

机种设置

视觉设置

工艺设置

设备参数

IO状态

流程日志


高级设置

# Reference And Learning Materials





[PC Programming Manual](#)

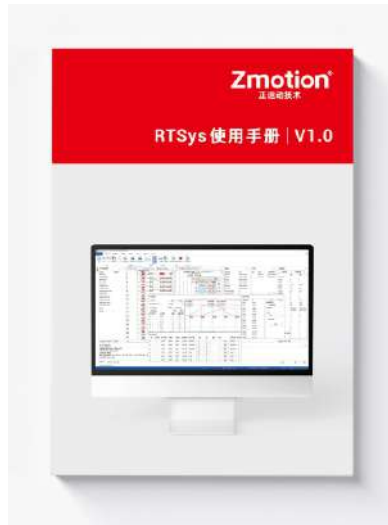

[RTSys User Manual](#)



[RTBasic Programming Manual](#)



[RTHmi Programming Manual](#)



[RTPlc Programming Manual](#)



[RTVision Programming Manual](#)



[Zmotion Technical Articles](#)



[Zmotion Videos](#)



[All Resources](#)

## Shenzhen Zmotion Technology Co.,Ltd

深圳市正运动技术有限公司

Tel: 0755-2606 6955

Fax: 0755-2606 6955

Website: [www.zmotionglobal.com](http://www.zmotionglobal.com)

Address: 3-7 floor, Building A1, Sunshine Industrial Zone, Hezhou Community, Baoan, Shenzhen, Guangdong, China

© All rights belong to Shenzhen Zmotion Technology Co.,Ltd.

Phone: +86 19925228195

Marketing: [zlm@zmotion.com.cn](mailto:zlm@zmotion.com.cn)

Technical Support: [tech\\_1@zmotion.com.cn](mailto:tech_1@zmotion.com.cn)



正运动技术



正运动小助手（学习园地）